


CDBJSC10650-G

Reverse Voltage: 650 V

Forward Current: 10 A



RoHS Device



Features

- Rated to 650V at 10 Amps
- Short recovery time.
- High speed switching possible.
- High frequency operation.
- High temperature operation.
- Temperature independent switching behaviour.
- Positive temperature coefficient on VF.

Circuit diagram

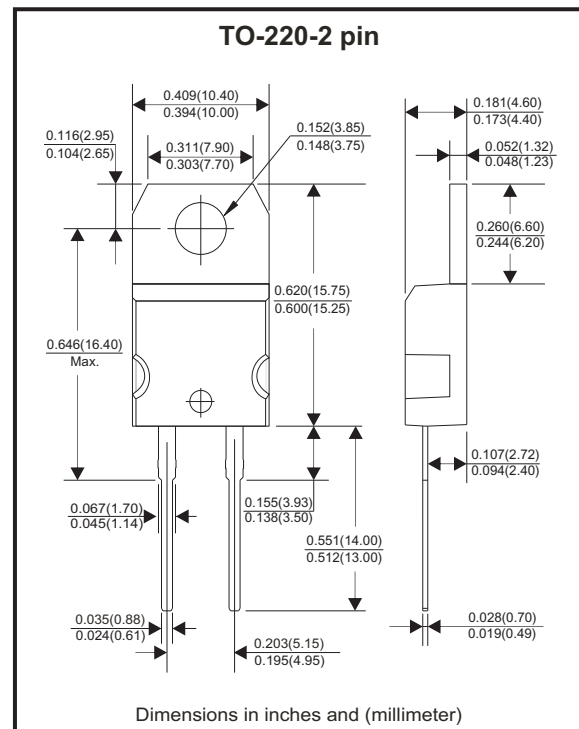

Maximum Rating (at Ta=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Value	Unit
Repetitive peak reverse voltage		V_{RRM}	650	V
Surge peak reverse voltage		V_{RSM}	650	V
DC blocking voltage		V_{DC}	650	V
Continuous forward current	$T_C = 25^\circ C$	I_F	33	A
	$T_C = 135^\circ C$		15	
	$T_C = 150^\circ C$		10	
Repetitive peak forward surge current	$T_C = 25^\circ C$, $t_p = 10ms$ Half sine wave, $D = 0.3$	I_{FRM}	50	A
Non-repetitive peak forward surge current	$T_C = 25^\circ C$, $t_p = 10ms$ Half sine wave	I_{FSM}	100	A
Power dissipation	$T_C = 25^\circ C$	P_{TOT}	109	W
	$T_C = 110^\circ C$		48	
Typical thermal resistance	Junction to case	$R_{\theta JC}$	1.37	$^\circ C/W$
Operating junction temperature range		T_J	-55 ~ +175	$^\circ C$
Storage temperature range		T_{STG}	-55 ~ +175	$^\circ C$

Company reserves the right to improve product design, functions and reliability without notice.

REV:

Electrical Characteristics (at Ta=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Typ	Max	Unit
Forward voltage	IF = 10 A , TJ = 25°C	VF	1.5	1.7	V
	IF = 10 A , TJ = 175°C		1.7	2.5	
Reverse current	VR = 650V , TJ = 25°C	IR	20	100	μA
	VR = 650V , TJ = 175°C		30	200	
Total capacitive charge	VR = 400V , TJ = 150°C Qc = ∫ ₀ ^{VR} C(V) dv	Qc	36	-	nC
Total capacitance	VR = 0V , TJ = 25°C , f = 1 MHz	C	690	730	pF
	VR = 200V , TJ = 25°C , f = 1 MHz		72	75	
	VR = 400V , TJ = 25°C , f = 1 MHz		71	74	

Typical Characteristics (CDBJSC10650-G)

Fig.1 - Forward Characteristics

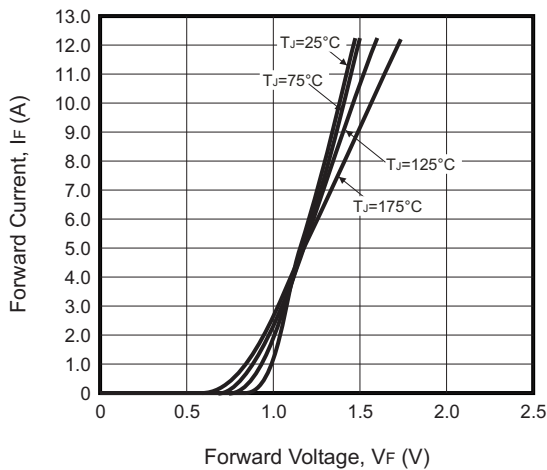


Fig.2 - Reverse Characteristics

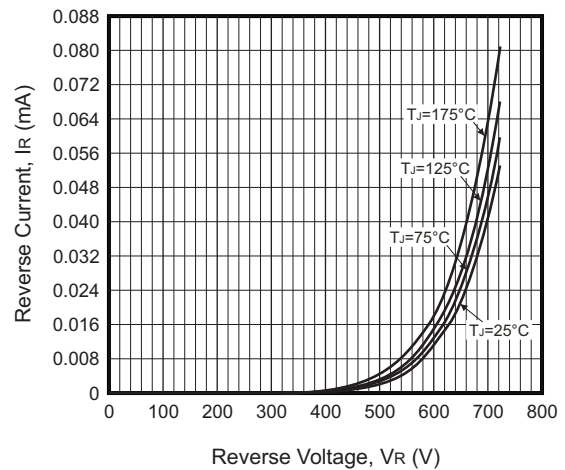


Fig.3 - Current Derating


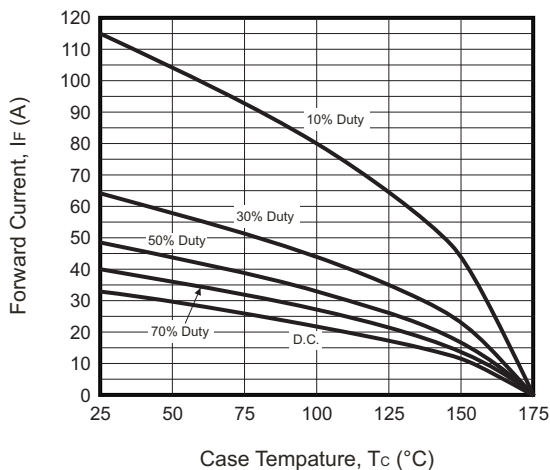


Fig.4 - Capacitance vs. Reverse Voltage

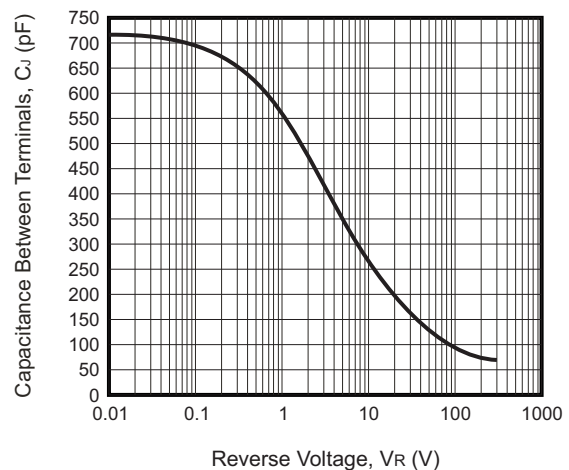

Company reserves the right to improve product design , functions and reliability without notice.

REV: