

CDBZC0230R-HF

$I_o = 200 \text{ mA}$

$V_R = 30 \text{ Volts}$

RoHS Device

Halogen Free




Features

- Low reverse current, typ. $I_R = 0.3 \mu\text{A}$
- Low forward voltage, typ. $V_F = 0.33 \text{ V}$
- Ultra small mold type.

Mechanical data

- Case: 0201/DFN0603 package, molded plastic.
- Terminals: Gold plated, solderable per MIL-STD-750, method 2026.
- Polarity: Color band denotes cathode end.
- Mounting position: Any
- Weight: 0.0004 grams(approx.).

Circuit diagram

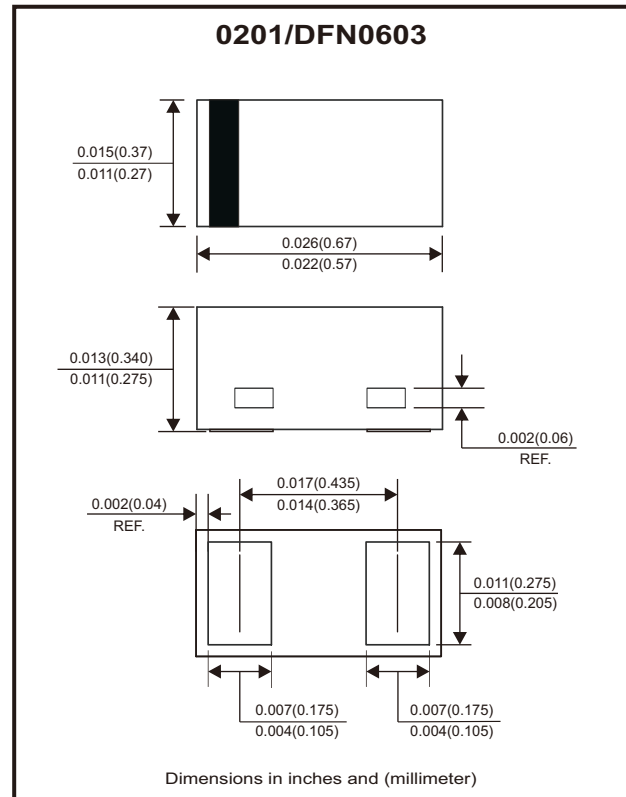

Maximum Rating (at $T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Reverse voltage		V_R			30	V
Average rectified forward current		I_o			200	mA
Forward current, surge peak (60Hz*1cycle)	8.3 ms single half sine-wave superimposed on rate load(JEDEC method)	I_{FSM}			2	A
Operating temperature range		T_J	-40		+125	$^\circ\text{C}$
Storage temperature range		T_{STG}	-55		+150	$^\circ\text{C}$

Electrical Characteristics (at $T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F = 10 \text{ mA}$	V_F		0.33	0.39	V
	$I_F = 100 \text{ mA}$	V_F			0.54	V
	$I_F = 200 \text{ mA}$	V_F			0.64	V
Reverse current	$V_R = 10 \text{ V}$	I_R		0.3	2	μA
	$V_R = 30 \text{ V}$	I_R			10	μA
Capacitance between terminals	$f = 1 \text{ MHz}$, and 1VDC reverse voltage	C_T		7		pF

Company reserves the right to improve product design , functions and reliability without notice.

REV:A

RATING AND CHARACTERISTIC CURVES (CDBZC0230R-HF)

Fig.1 - Forward Characteristics

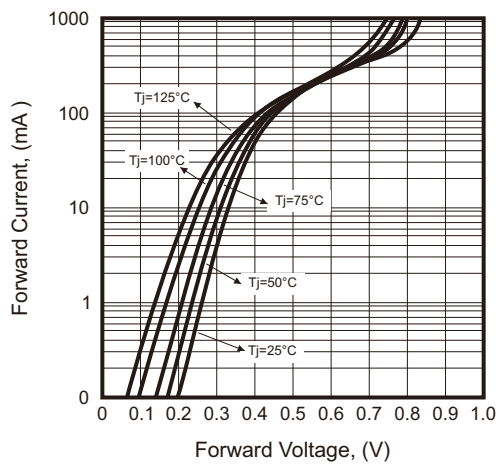


Fig.2 - Reverse Characteristics

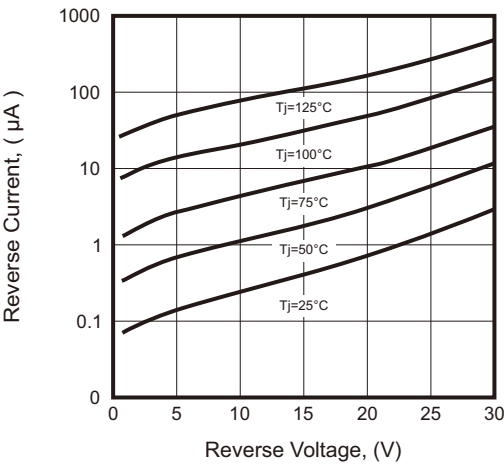


Fig.3 - Capacitance of Diodes



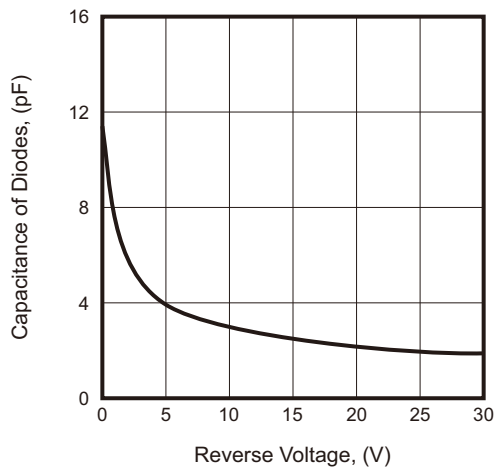


Fig.4 - Current Derating Curve

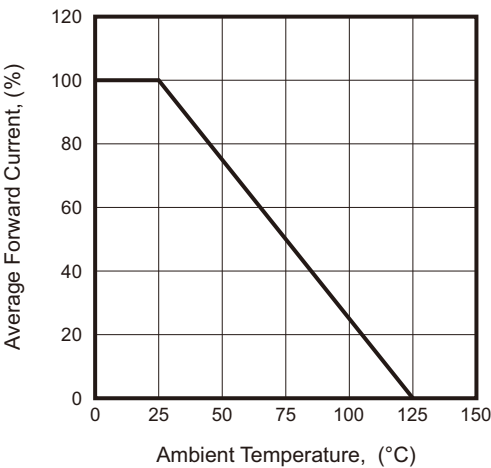

Reel Taping Specification

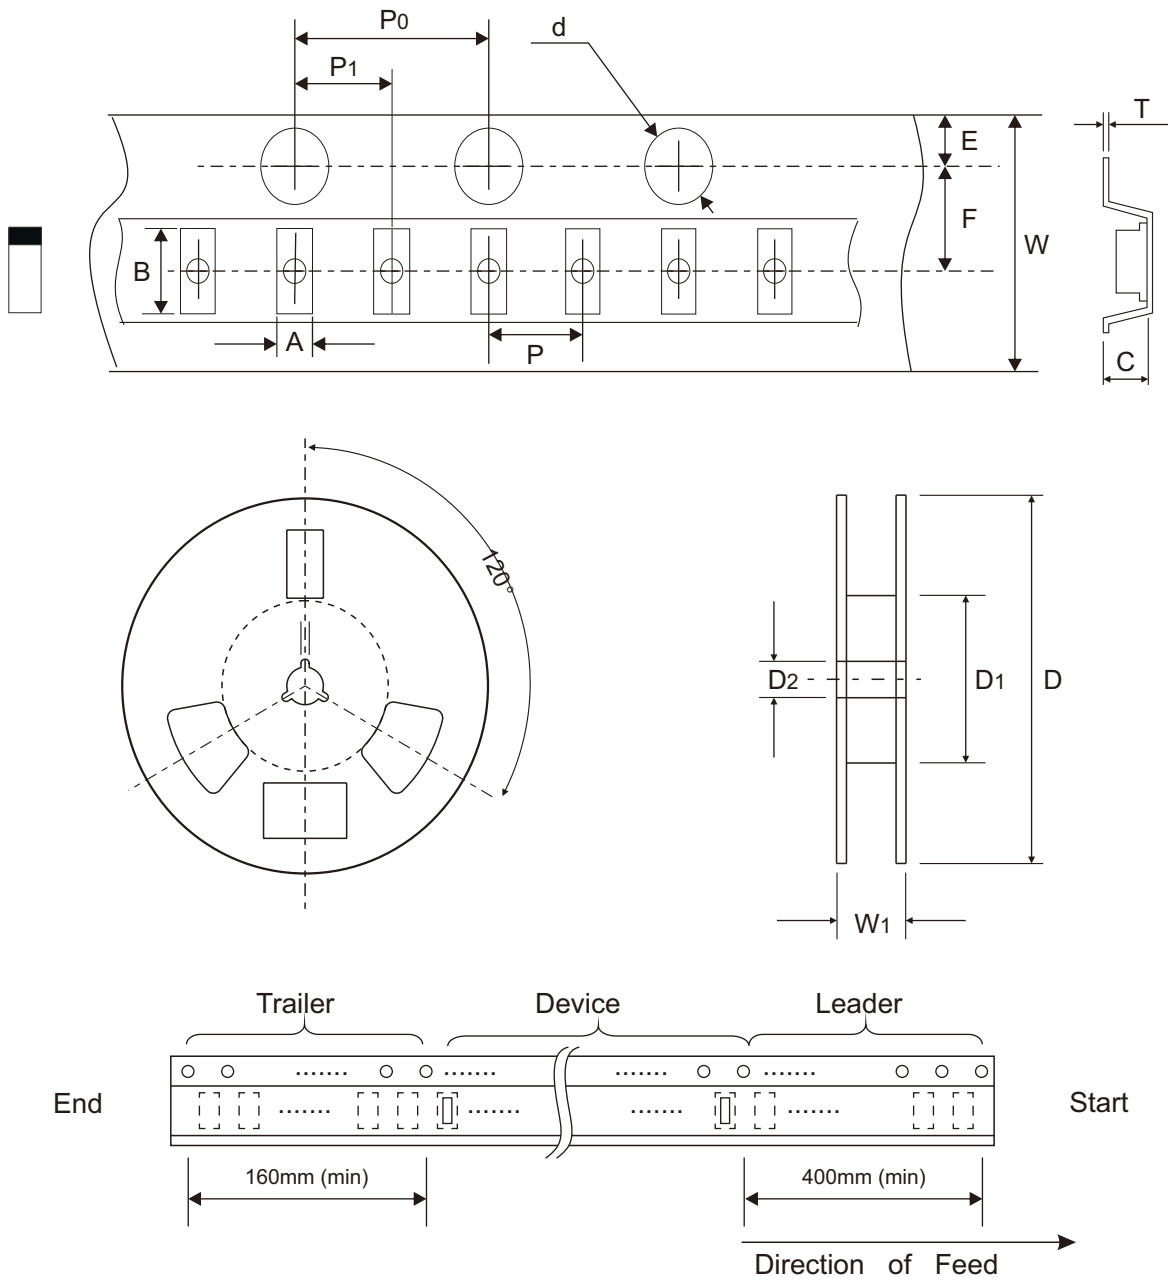

0201 (DFN0603)	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	0.37 ± 0.03	0.67 ± 0.03	0.35 ± 0.03	$1.50 + 0.10 - 0.00$	178.00 ± 1.00	60.00 ± 0.50	13.50 ± 0.20
	(inch)	0.015 ± 0.001	0.026 ± 0.001	0.014 ± 0.001	$0.059 + 0.004 - 0.000$	7.008 ± 0.039	2.362 ± 0.020	0.531 ± 0.008

0201 (DFN0603)	SYMBOL	E	F	P	P0	P1	T	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.05	2.00 ± 0.05	4.00 ± 0.10	2.00 ± 0.05	0.20 ± 0.02	$8.00 + 0.30 - 0.10$	$12.00 + 0.50 - 0.00$
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.079 ± 0.002	0.157 ± 0.004	0.079 ± 0.002	0.008 ± 0.001	$0.315 + 0.012 - 0.004$	$0.472 + 0.020 - 0.000$


Marking Code

Part Number	Marking Code
CDBZC0230R-HF	2A



Suggested PAD Layout

SIZE	0201(DFN0603)	
	(mm)	(inch)
A	0.16	0.006
B	0.24	0.009
C	0.34	0.013
D	0.40	0.016
E	0.64	0.025



Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
0201 (DFN0603)	10,000	7