


## TV05A5V0-HF Thru. TV05A191-HF

Working Peak Reverse Voltage: 5.0 to 190 Volts

Peak Pulse Power: 500 Watts

RoHS Device

Halogen Free




### Features


- Glass passivated chip.
- Low leakage.
- 500W peak pulse power capability with a 10/1000 $\mu$ s waveform, repetitive rate (duty cycle): 0.01%.
- Uni and Bidirectional unit.
- Excellent clamping capability.
- Very fast response time.

### Mechanical data

- Case: JEDEC DO-214AC, molded plastic.
- Epoxy: UL 94V-0 rate flame retardant.
- Lead: Solderable per MIL-STD-750, method 2026.
- Polarity: Color band denotes cathode end except bipolar.
- Mounting position: Any.
- Weight: 0.069 grams approx.

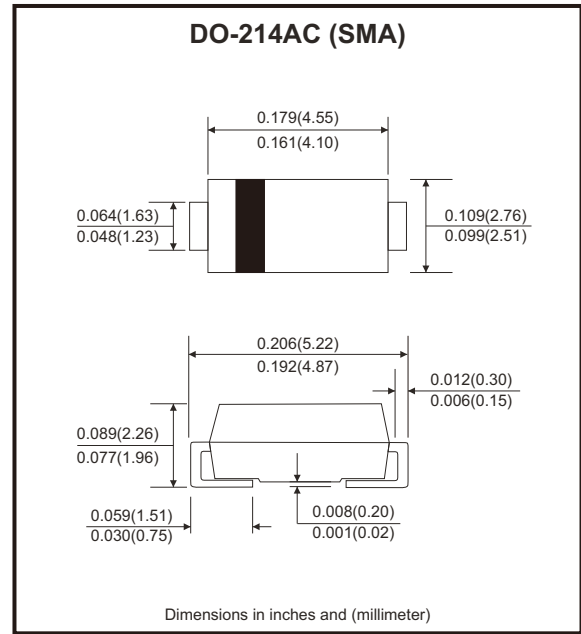

### Circuit Diagram



### Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

Characteristics	Symbol	Value	Units
Peak power dissipation on 10/1000 $\mu$ s waveform	P <sub>PP</sub>	500	Watts
Peak pulse current on 10/1000 $\mu$ s waveform	I <sub>PP</sub>	See Next Table	A
Power dissipation on infinite heatsink at T <sub>L</sub> =75°C	P <sub>D</sub>	3.0	Watts
Peak forward surge current, 8.3ms single half sine-wave, uni-directional only (Note 1)	I <sub>FSM</sub>	70	A
Maximum instantaneous forward voltage at 25.0A for uni-directional only	V <sub>F</sub>	3.5	V
Operating junction temperature range	T <sub>J</sub>	-55 to +150	°C
Storage temperature range	T <sub>STG</sub>	-55 to +150	°C

Notes: 1. Measured on 8.3ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.

## Rating and Characteristic Curves (TV05A5V0-HF Thru. TV05A191-HF)

Fig.1 - Pulse Derating Curve

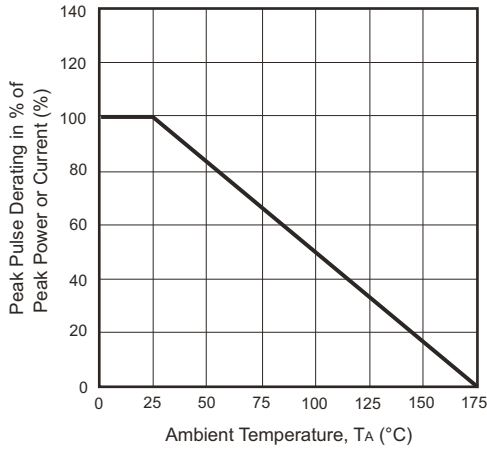


Fig.2 - Steady State Power Derating Curve

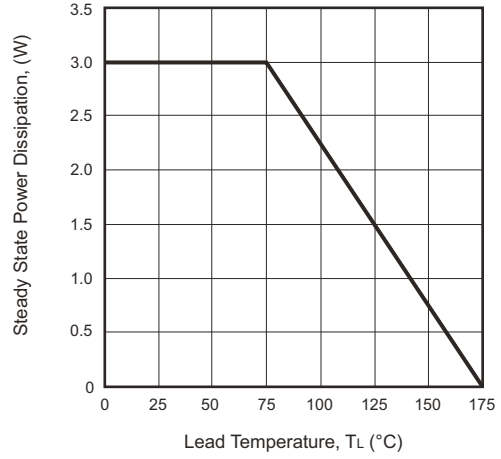


Fig.3 - Max. Non-repetitive Surge Current

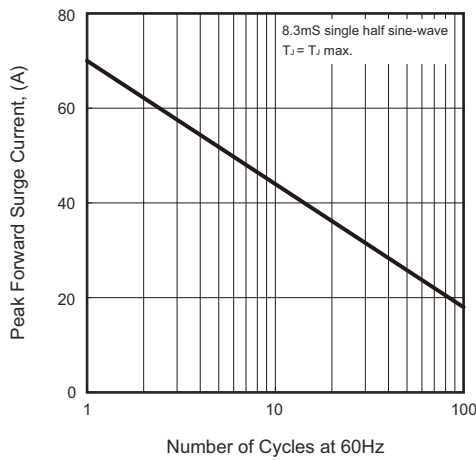


Fig.4 - Peak Pulse Power Rating Curve


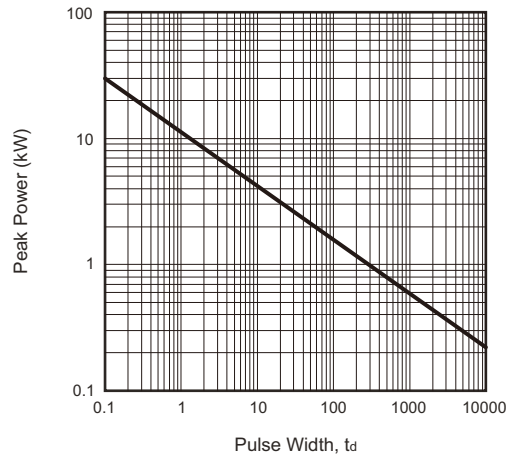


Fig.5 - Pulse Waveform

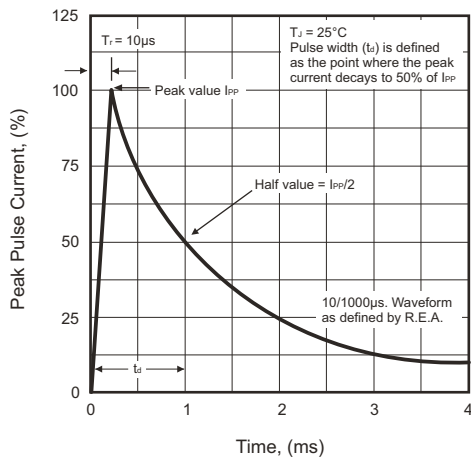

Company reserves the right to improve product design, functions and reliability without notice.

REV:C

## Electrical Characteristics (TV05A5V0-HF Thru. TV05A191-HF)





Part No	Breakdown voltage $V_{BR}$ @ $I_T$			Maximum Reverse Leakage @ $V_{RWM}$	Working Peak Reverse Voltage	Maximum Reverse Surge Current @ 10/1000 $\mu$ s sinewave	Maximum Clamping Voltage @ $I_{PP}$	Marking Code	
	$V_{BR}$ Min. (V)	$V_{BR}$ Max. (V)	$I_T$ (mA)	$I_R$ ( $\mu$ A)	$V_{RWM}$ (V)	$I_{PP}$ (A)	$V_C$ (V)	UNI	BI
TV05A5V0J(B)-HF	6.40	7.00	10	800	5.00	54.3	9.20	5AE	5WE
TV05A6V0J(B)-HF	6.67	7.37	10	800	6.00	48.5	10.3	5AG	5WG
TV05A6V5J(B)-HF	7.22	7.98	10	500	6.50	44.6	11.2	5AK	5WK
TV05A7V0J(B)-HF	7.78	8.60	10	200	7.00	41.7	12.0	5AM	5WM
TV05A7V5J(B)-HF	8.33	9.21	1	100	7.50	38.8	12.9	5AP	5WP
TV05A8V0J(B)-HF	8.89	9.83	1	50	8.00	36.8	13.6	5AR	5WR
TV05A8V5J(B)-HF	9.44	10.4	1	10	8.50	34.7	14.4	5AT	5WT
TV05A9V0J(B)-HF	10.0	11.1	1	5	9.00	32.5	15.4	5AV	5WV
TV05A100J(B)-HF	11.1	12.3	1	1	10.0	29.4	17.0	5AX	5WX
TV05A110J(B)-HF	12.2	13.5	1	1	11.0	27.5	18.2	5AZ	5WZ
TV05A120J(B)-HF	13.3	14.7	1	1	12.0	25.1	19.9	5BE	5XE
TV05A130J(B)-HF	14.4	15.9	1	1	13.0	23.3	21.5	5BG	5XG
TV05A140J(B)-HF	15.6	17.2	1	1	14.0	21.6	23.2	5BK	5XK
TV05A150J(B)-HF	16.7	18.5	1	1	15.0	20.5	24.4	5BM	5XM
TV05A160J(B)-HF	17.8	19.7	1	1	16.0	19.2	26.0	5BP	5XP
TV05A170J(B)-HF	18.9	20.9	1	1	17.0	18.1	27.6	5BR	5XR
TV05A180J(B)-HF	20.0	22.1	1	1	18.0	17.1	29.2	5BT	5XT
TV05A190J(B)-HF	21.1	23.3	1	1	19.0	16.2	30.8	5BB	5XB
TV05A200J(B)-HF	22.2	24.5	1	1	20.0	15.4	32.4	5BV	5XV
TV05A220J(B)-HF	24.4	26.9	1	1	22.0	14.1	35.5	5BX	5XX
TV05A240J(B)-HF	26.7	29.5	1	1	24.0	12.9	38.9	5BZ	5XZ
TV05A260J(B)-HF	28.9	31.9	1	1	26.0	11.9	42.1	5CE	5YE
TV05A280J(B)-HF	31.1	34.4	1	1	28.0	11.0	45.4	5CG	5YG
TV05A300J(B)-HF	33.3	36.8	1	1	30.0	10.3	48.4	5CK	5YK
TV05A330J(B)-HF	36.7	40.6	1	1	33.0	9.4	53.3	5CM	5YM
TV05A360J(B)-HF	40.0	44.2	1	1	36.0	8.6	58.1	5CP	5YP
TV05A400J(B)-HF	44.4	49.1	1	1	40.0	7.75	64.5	5CR	5YR
TV05A430J(B)-HF	47.8	52.8	1	1	43.0	7.20	69.4	5CT	5YT
TV05A450J(B)-HF	50.0	55.3	1	1	45.0	6.88	72.7	5CV	5YV
TV05A480J(B)-HF	53.3	58.9	1	1	48.0	6.46	77.4	5CX	5YX
TV05A510J(B)-HF	56.7	62.7	1	1	51.0	6.07	82.4	5CZ	5YZ
TV05A540J(B)-HF	60.0	66.3	1	1	54.0	5.74	87.1	5RE	5ZE
TV05A580J(B)-HF	64.4	71.2	1	1	58.0	5.34	93.6	5RG	5ZG
TV05A600J(B)-HF	66.7	73.7	1	1	60.0	5.17	96.8	5RK	5ZK
TV05A640J(B)-HF	71.1	78.6	1	1	64.0	4.85	103	5RM	5ZM
TV05A700J(B)-HF	77.8	86.0	1	1	70.0	4.42	113	5RP	5ZP
TV05A750J(B)-HF	83.3	92.1	1	1	75.0	4.13	121	5RR	5ZR
TV05A780J(B)-HF	86.7	95.8	1	1	78.0	3.97	126	5RT	5ZT
TV05A800J(B)-HF	88.8	97.6	1	1	80.0	3.86	129.6	5RB	5ZB
TV05A850J(B)-HF	94.4	104	1	1	85.0	3.65	137	5RV	5ZV

## Electrical Characteristics (TV05A5V0-HF Thru. TV05A191-HF)

Part No	Breakdown voltage $V_{BR}$ @ $I_T$			Maximum Reverse Leakage @ $V_{RWM}$	Working Peak Reverse Voltage	Maximum Reverse Surge Current @ 10/1000 $\mu$ s sinewave	Maximum Clamping Voltage @ $I_{PP}$	Marking Code	
	$V_{BR}$ Min. (V)	$V_{BR}$ Max. (V)	$I_T$ (mA)	$I_R$ ( $\mu$ A)	$V_{RWM}$ (V)	$I_{PP}$ (A)	$V_C$ (V)	UNI	BI
TV05A900J(B)-HF	100	111	1	1	90.0	3.42	146	5RX	5ZX
TV05A101J(B)-HF	111	123	1	1	100	3.09	162	5RZ	5ZZ
TV05A111J(B)-HF	122	135	1	1	110	2.82	177	5SE	5VE
TV05A121J(B)-HF	133	147	1	1	120	2.59	193	5SG	5VG
TV05A131J(B)-HF	144	159	1	1	130	2.39	209	5SK	5VK
TV05A141J(B)-HF	155	171	1	1	140	2.20	226.8	5SB	5VB
TV05A151J(B)-HF	167	185	1	1	150	2.06	243	5SM	5VM
TV05A161J(B)-HF	178	197	1	1	160	1.93	259	5SP	5VP
TV05A171J(B)-HF	189	209	1	1	170	1.82	275	5SR	5VR
TV05A181J(B)-HF	200	220	1	1	180	1.71	291.6	5ST	5VT
TV05A191J(B)-HF	211	232	1	1	190	1.62	307.8	5SV	5VV

- Notes: 1. Suffix J denotes 5% tolerance devices.  
 2. Suffix B after part number to specify bi-directional devices.  
 3. For bi-directional devices having  $V_R$  of 10 volts and under, the  $I_R$  limit is double.  
 4. For Uni-directional devices  $V_F$  max=3.5V at  $I_F$ =25 A 300 $\mu$ s square wave pulse.

## Reel Taping Specification

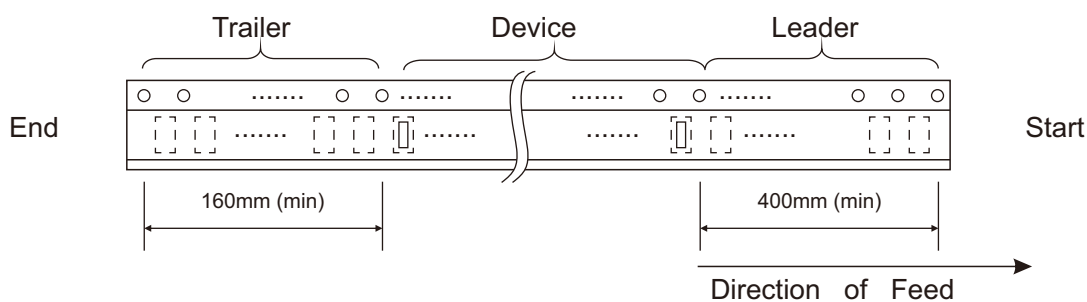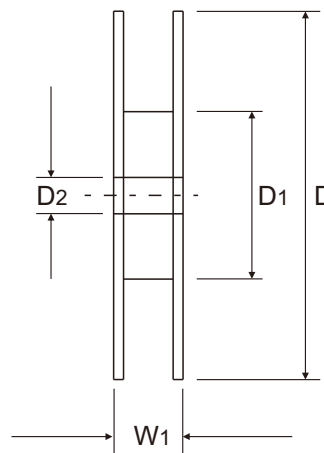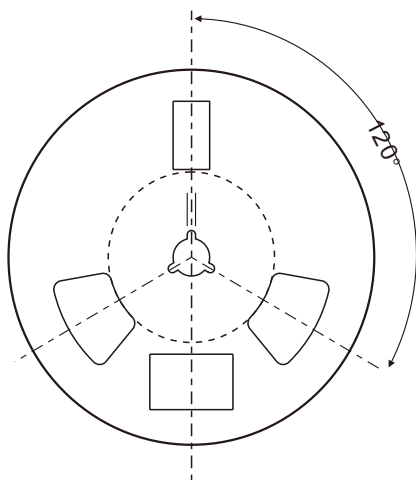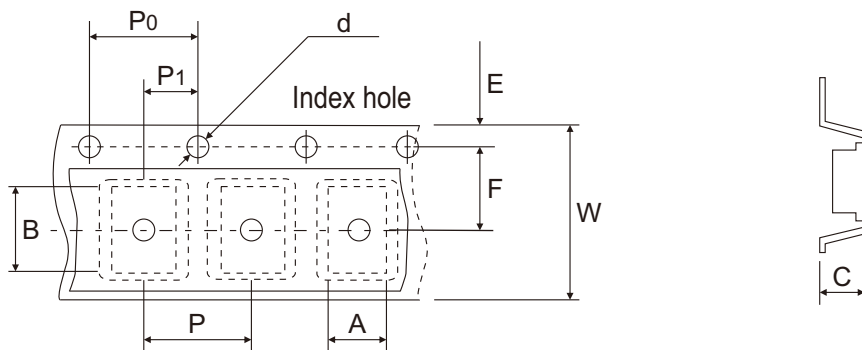

DO-214AC (SMA)	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	2.79 ± 0.10	5.33 ± 0.10	4.50 MAX.	1.75 ± 0.10	330 MAX.	50.00 MIN.	13.00 ± 0.20
	(inch)	0.110 ± 0.004	0.210 ± 0.004	0.177 MAX.	0.069 ± 0.004	13.00 MAX.	1.969 MIN.	0.512 ± 0.008

DO-214AC (SMA)	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	5.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	12.00 ± 0.30	18.40 MAX.
	(inch)	0.069 ± 0.004	0.217 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.472 ± 0.012	0.724 MAX.

Company reserves the right to improve product design, functions and reliability without notice.


REV:C

## Marking Code

1. **C**: COMCHIP
2. **○**: Package


○	PKG
A	SMA
B	SMB
C	SMC

3. **XXX**: Marking code (see Page.3~4)
4. **█**: Cathod Band

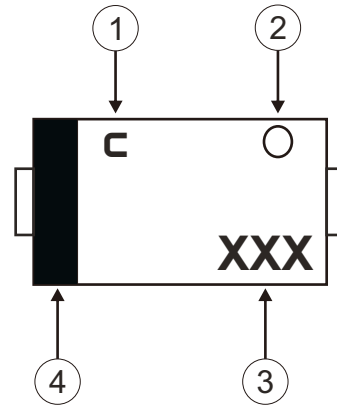

## Suggested PAD Layout

SIZE	DO-214AC (SMA)	
	(mm)	(inch)
<b>A</b>	5.28	0.208
<b>B</b>	1.88 MAX	0.074 MAX
<b>C</b>	1.52 MIN	0.060 MIN
<b>D</b>	1.68 MIN	0.066 MIN

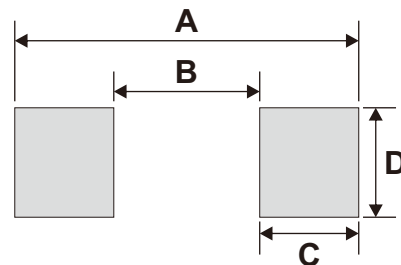

## Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
DO-214AC (SMA)	5,000	13