

ACDBUC0320/0330/0340-HF

High-Reliability and High-Performance

RoHS Device
Halogen Free




Features

- Low forward voltage.
- Designed for mounting on small surface.
- Extremely thin package.
- Majority carrier conduction.
- AEC-Q101 Qualified & PPAP.

Mechanical data

- Case: 0603C/SOD-523F standard package, molded plastic.
- Terminals: Gold plated, solderable per MIL-STD-750, method 2026.
- Polarity: Indicated by cathode band.
- Mounting position: Any.

Circuit Diagram

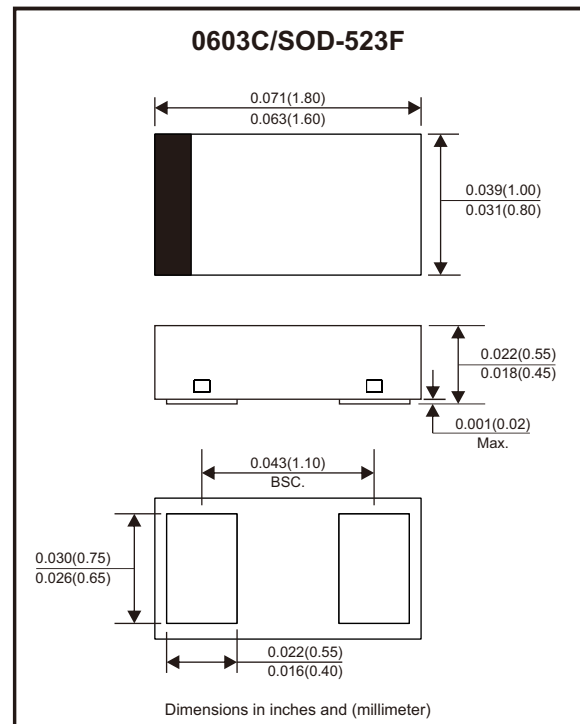

Maximum Rating (at TA=25°C unless otherwise noted)

Parameter	Symbol	ACDBUC0320-HF	ACDBUC0330-HF	ACDBUC0340-HF	Unit
Repetitive peak reverse voltage	V_{RRM}	20	30	40	V
RMS Reverse voltage	V_{RMS}	14	21	28	V
Reverse voltage	V_R	20	30	40	V
Average forward rectified current	I_o	350			mA
Peak forward rectified current 8.3ms single half sine-wave	I_{FSM}	1.5			A
Power dissipation	P_D	150			mW
Thermal resistance, junction to ambient	$R_{\theta JA}$	667			°C/W
Junction temperature range	T_j	-55 to +125			°C
Storage temperature range	T_{STG}	-55 to +125			°C

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F = 20\text{mA}$	V_F			370	mV
	$I_F = 200\text{mA}$	V_F			600	mV
Reverse current	ACDBUC0320-HF $V_R = 10\text{V}$	I_R			5	μA
	ACDBUC0330-HF $V_R = 20\text{V}$	I_R			5	μA
	ACDBUC0340-HF $V_R = 30\text{V}$	I_R			5	μA
Capacitance between terminals	$V_R = 0\text{V}$, $f = 1\text{MHz}$	C_J		39		pF

Typical Rating and Characteristic Curves (ACDBUC0320/0330/0340-HF)

Fig.1 - Forward Characteristics

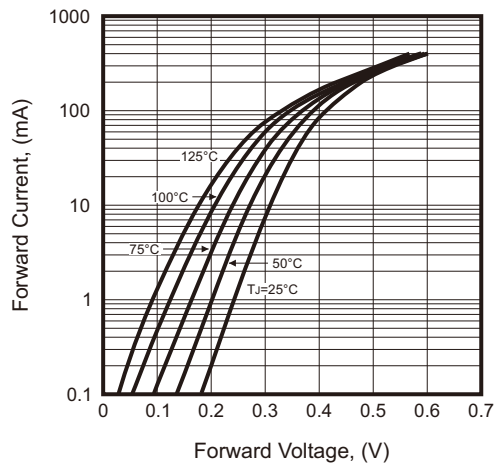


Fig.2 - Reverse Characteristics

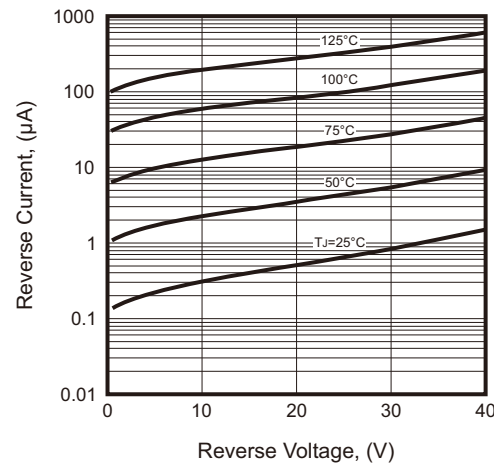


Fig.3 - Typical Capacitance Between Terminals Characteristics



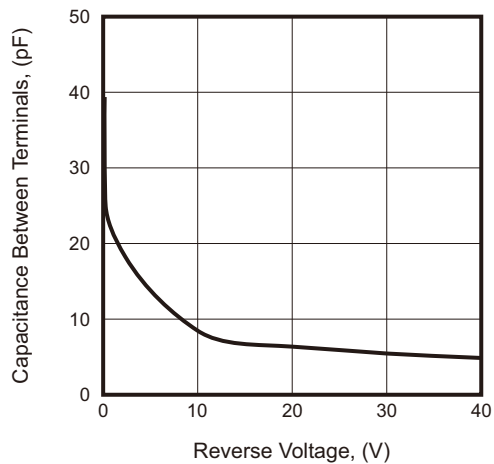


Fig.4 - Current Derating Curve

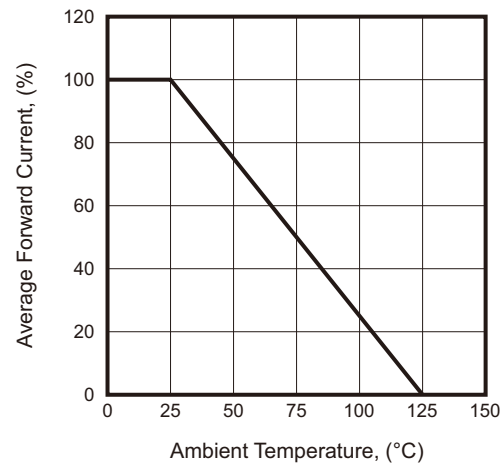

Reel Taping Specification

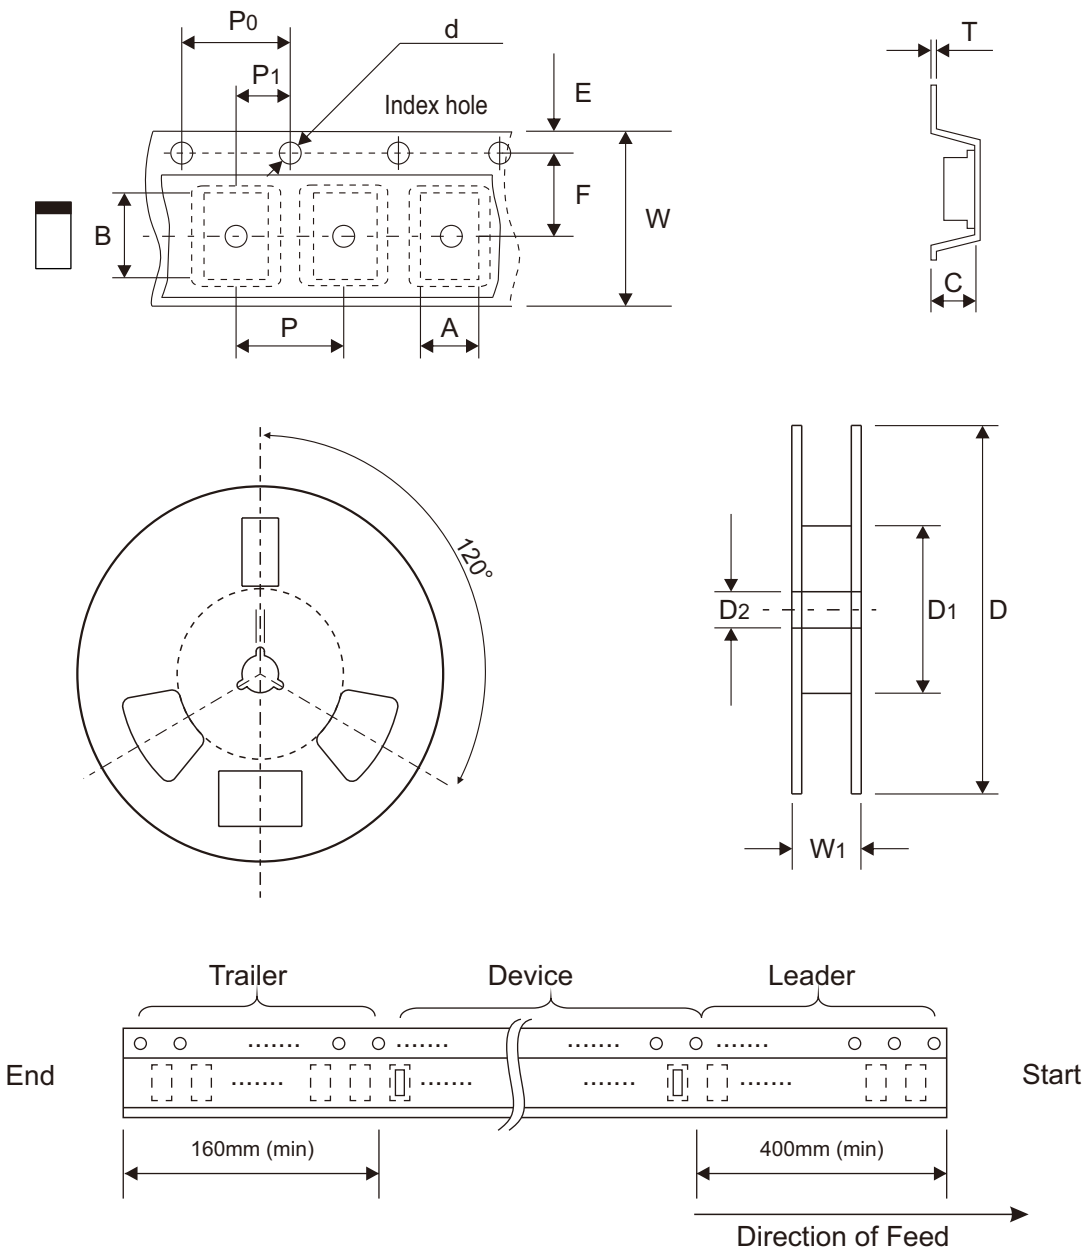

0603C (SOD-523F)	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	1.05 ± 0.05	1.96 ± 0.05	0.57 ± 0.05	$1.50 + 0.10 - 0.00$	178.00 ± 1.00	60.00 ± 0.50	13.50 ± 0.20
	(inch)	0.041 ± 0.002	0.077 ± 0.002	0.022 ± 0.002	$0.059 + 0.004 - 0.000$	7.008 ± 0.039	2.362 ± 0.020	0.531 ± 0.008

0603C (SOD-523F)	SYMBOL	E	F	P	P0	P1	T	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.05	2.00 ± 0.05	0.20 ± 0.03	8.00 ± 0.20	$12.00 + 0.50 - 0.00$
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.002	0.079 ± 0.002	0.008 ± 0.001	0.315 ± 0.008	$0.472 + 0.020 - 0.000$

Marking Code


Part Number	Marking Code
ACDBUC0320-HF	BH
ACDBUC0330-HF	BJ
ACDBUC0340-HF	BK



XX = Product type marking code

Suggested P.C.B. PAD Layout

SIZE	0603C/SOD-523F	
	(mm)	(inch)
A	1.10	0.043
B	0.70	0.028
C	1.00	0.039
D	1.80	0.071
E	0.40	0.016

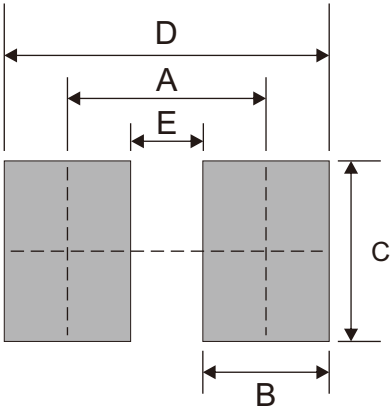

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
0603C/SOD-523F	4,000	7