


ACPDV3V0A-HF Thru. ACPDV36V0A-HF

RoHS Device
Halogen Free




Features


- IEC61000-4-2 (ESD) ± 30 kV (air/contact).
- IEC61000-4-4 (EFT) 40A (5/50ns).
- Protects one I/O line (bidirectional).
- Low clamping voltage.
- Working voltages: 3V~36V.
- Low leakage current.
- Response time is < 1 ns.

Mechanical data

- Case: SOD-323 package.
- Flammability rating: UL 94V-0.
- High temperature soldering guaranteed: 260°C/10s.

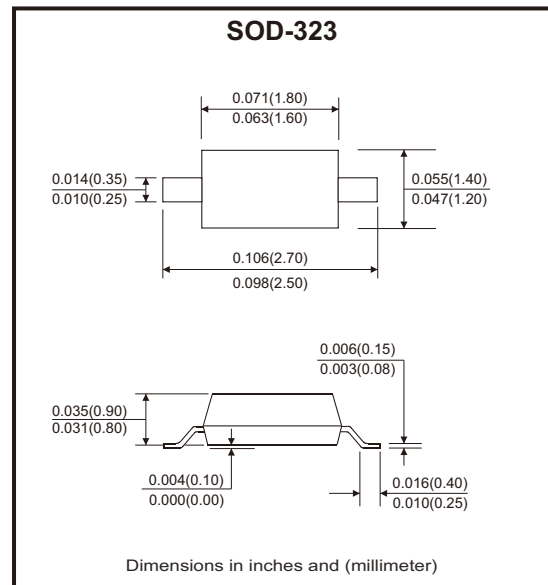

Circuit diagram



Maximum Rating (at Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
ESD per IEC 61000-4-2 (air) ESD per IEC 61000-4-2 (contact)	ESD	± 30	kV
Peak pulse power (8/20 μ s)	P _{PP}	See next table	W
Peak pulse current (8/20 μ s)	I _{PP}	See next table	A
Operating junction temperature range	T _J	-55 to +150	°C
Storage temperature range	T _{STG}	-55 to +150	°C
Lead soldering temperature	T _L	260	°C

Electrical Characteristics (at Ta=25°C unless otherwise noted)

Part No.	V _{RWM} (V) Max	V _{BR} @1mA(V) Min	V _C @1A(V) Max	V _{C@IPP} (V)		V _{C@IPP} (V)		Peak pulse current	I _R (μA) Max	C _J (pF) Typ
				Max	I _{PP} (A)	Max	I _{PP} (A)	P _{PP} (W)		
ACPDV3V0A-HF	3	4.0	7.0	13.9	8	20.0	20	400	5	0.8
ACPDV5V0A-HF	5	6.0	9.8	18.3	8	20.0	18	360	1	0.8
ACPDV8V0A-HF	8	8.5	13.4	18.5	8	24.0	18	432	1	0.8
ACPDV12V0A-HF	12	13.3	19.0	24.0	6	28.6	12	343	1	0.8
ACPDV15V0A-HF	15	16.7	24.0	29.0	5	31.8	10	318	1	0.8
ACPDV18V0A-HF	18	20.0	35.0	45.0	5	53.0	7	371	1	0.8
ACPDV20V0A-HF	20	22.0	38.0	45.0	4	55.0	7	385	1	0.8
ACPDV24V0A-HF	24	26.7	43.0	45.0	3	56.0	6	336	1	0.8
ACPDV36V0A-HF	36	40.0	60.0	65.0	2	75.0	4.5	338	1	0.8

Typical Rating and Characteristic Curves (ACPDV3V0A-HF Thru. ACPDV24V0A-HF)

Fig.1 - 8/20 μ s Waveform per IEC 61000-4-5

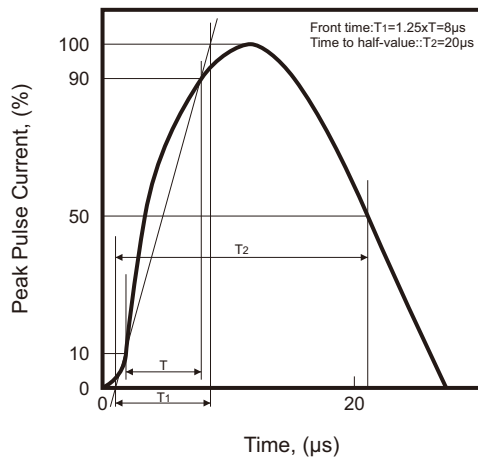


Fig.2 - Contact Discharge Current Waveform per IEC 61000-4-2

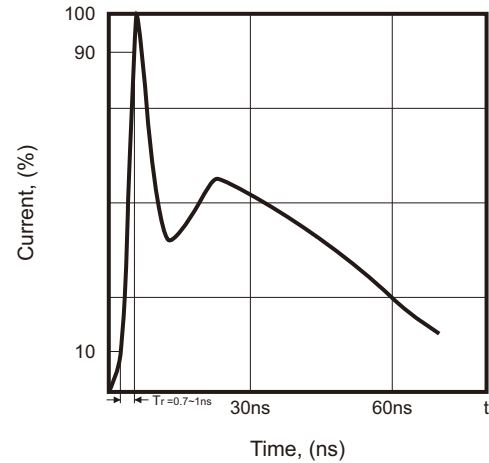


Fig.3 - Voltage vs Capacitance

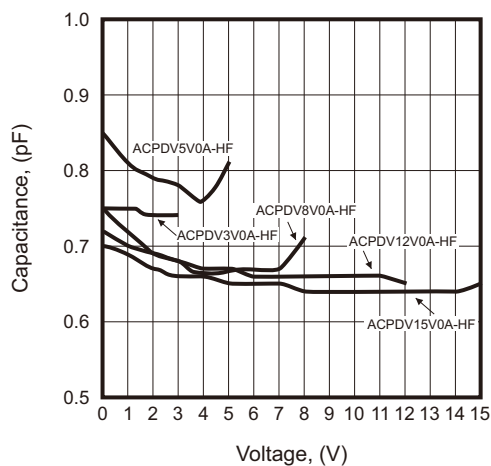


Fig.4 - Voltage vs Capacitance

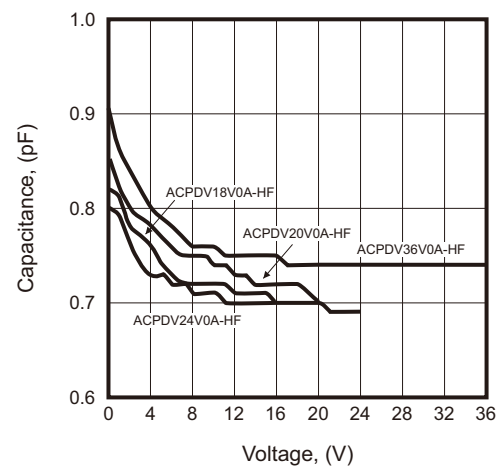


Fig.5 - Clamping Voltage vs Peak Pulse Current






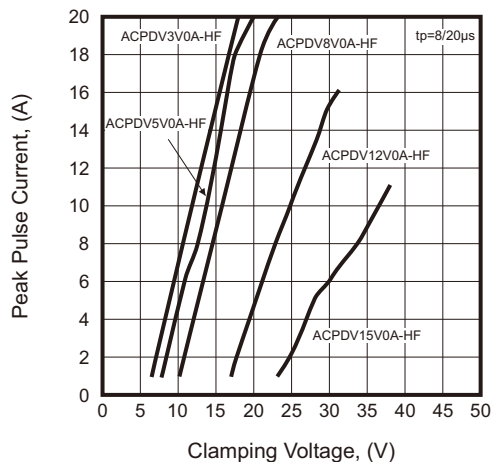


Fig.6 - Clamping Voltage vs Peak Pulse Current

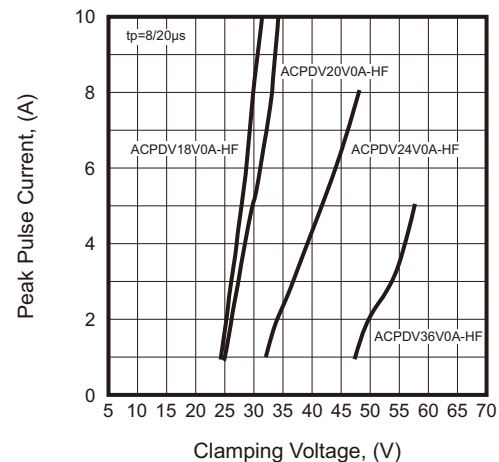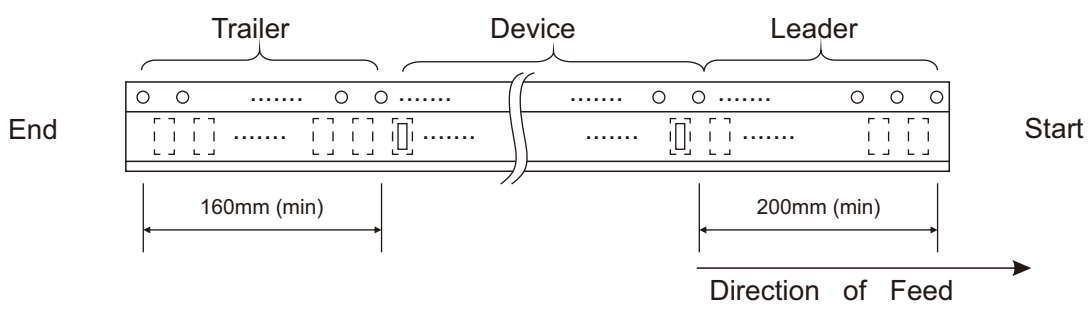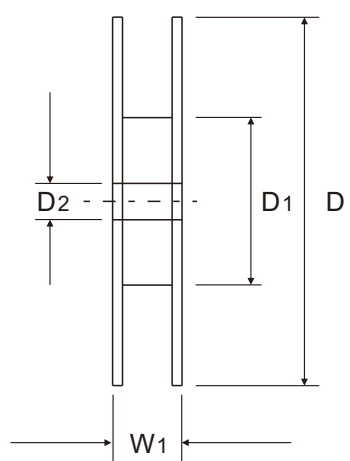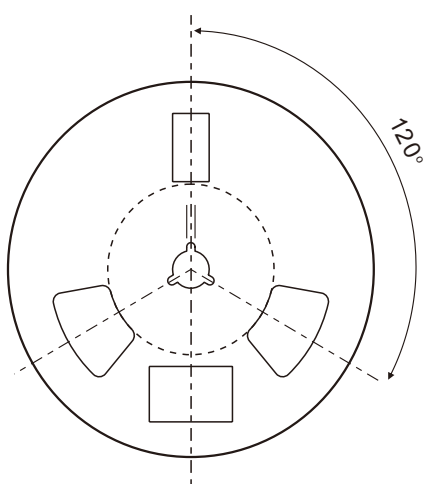

Reel Taping Specification

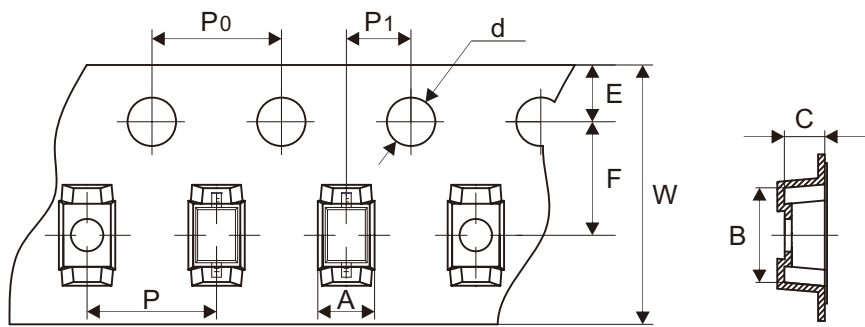

SOD-323	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	1.46 ± 0.05	2.90 ± 0.05	1.25 ± 0.05	1.50 ± 0.10	178.00 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.057 ± 0.002	0.114 ± 0.002	0.049 ± 0.002	0.059 ± 0.004	7.008 ± 0.079	2.142 ± 0.039	0.512 ± 0.039

SOD-323	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	8.00 + 0.30 - 0.10	12.30 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.315 + 0.012 - 0.004	0.484 ± 0.039

Marking Code


Part Number	Marking Code
ACPDV3V0A-HF	CC
ACPDV5V0A-HF	AC
ACPDV8V0A-HF	BC
ACPDV12V0A-HF	DC
ACPDV15V0A-HF	EC
ACPDV18V0A-HF	FC
ACPDV20V0A-HF	GC
ACPDV24V0A-HF	HC
ACPDV36V0A-HF	IC



xx = Product type marking code

Suggested P.C.B. PAD Layout

SIZE	SOD-323	
	(mm)	(inch)
A	2.85	0.112
B	1.60	0.063
C	0.85	0.033

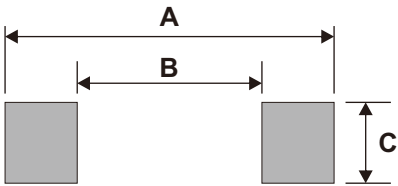

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOD-323	3,000	7