

ACMSP3401-HF

**P-Channel
RoHS Device
Halogen Free**





Features

- $R_{DS(ON)} \leq 55\text{m}\Omega$ @ $V_{GS} = -10\text{V}$.
- $R_{DS(ON)} \leq 75\text{m}\Omega$ @ $V_{GS} = -4.5\text{V}$.
- $R_{DS(ON)} \leq 110\text{m}\Omega$ @ $V_{GS} = -2.5\text{V}$.
- High-speed switching.
- Drive circuits can be simple.
- Parallel use is easy.
- AEC-Q101 Qualified.

Mechanical data

- Case: SOT-23, molded plastic.
- Molding compound, UL flammability classification rating 94V-0.
- Terminals: Matte tin plated leads, solderable per MIL-STD-202, method 208.

Circuit Diagram

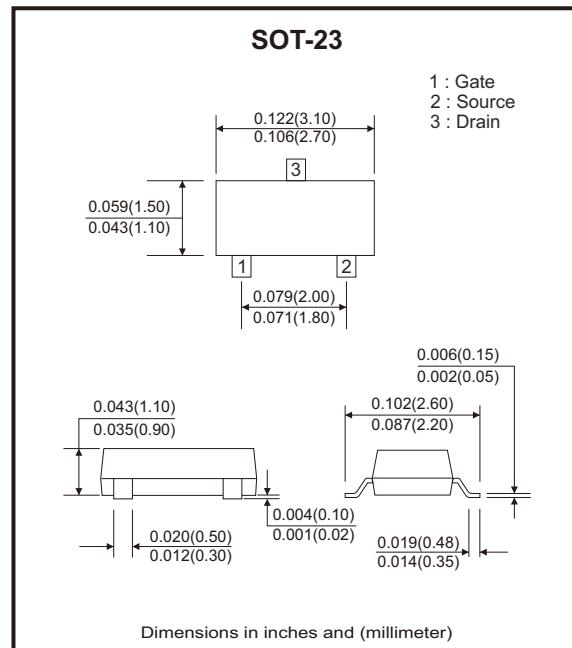

Maximum Ratings (at $T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DSS}	-30	V
Gate-source voltage	V_{GSS}	± 12	V
Continuous drain current $T_a=25^\circ\text{C}$	I_D	-4	A
Power dissipation $T_a=25^\circ\text{C}$	P_D	1.2	W
Thermal resistance junction to ambient air	$R_{\theta JA}$	105	$^\circ\text{C}/\text{W}$
Operating junction temperature range	T_J	-55 to +150	$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +150	$^\circ\text{C}$

Company reserves the right to improve product design , functions and reliability without notice.

REV:A

Electrical Characteristics (at $T_a=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Off Characteristics						
Drain-source breakdown voltage	V_{DSS}	$V_{GS} = 0V, I_D = 250\mu A$	-30			V
Drain-source leakage current	I_{DSs}	$V_{DS} = -20V, V_{GS} = 0V$			-1	μA
Gate-body leakage	I_{GSS}	$V_{GS} = \pm 12V, V_{DS} = 0V$			± 100	nA
On Characteristics (Note 2)						
Static drain-source on resistance	$R_{DS(ON)}$	$V_{GS} = -10V, I_D = -4.2A$		45	55	$m\Omega$
		$V_{GS} = -4.5V, I_D = -4A$		62	75	
		$V_{GS} = -2.5V, I_D = -1A$		94	110	
Gate threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	-0.7	-1	-1.3	V
Dynamic Characteristics (Note 3)						
Input capacitance	C_{iss}	$V_{GS} = 0V, V_{DS} = -15V, f = 1MHz$		965		pF
Output capacitance	C_{oss}			70		
Reverse transfer capacitance	C_{rss}			64		
Drain-Source Diode Characteristics						
Diode forward voltage (Note 1)	V_{SD}	$I_S = -1A, V_{GS} = 0V$		0.8	-1	V

Notes: 1. Surface mounted on FR4 board, $t \leq 10$ sec.

2. Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.

3. Guaranteed by design, not subject to production.

Rating and Characteristic Curves (ACMSP3401-HF)

Fig.1 - Output Characteristics

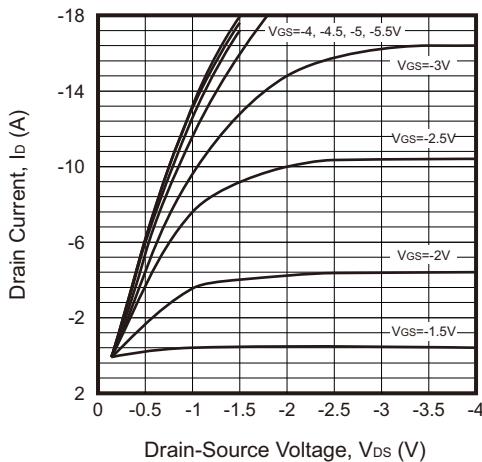


Fig.2 - Drain-Source on Resistance

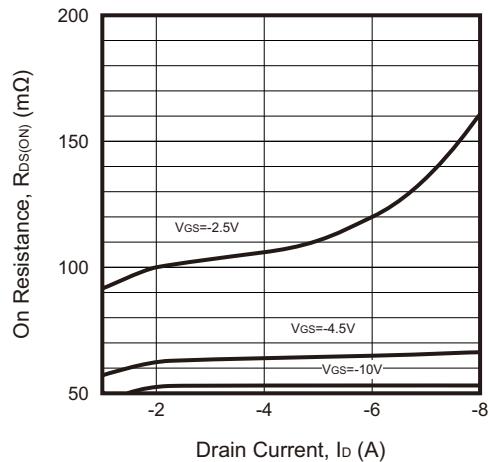


Fig.3 - Drain-Source On Resistance

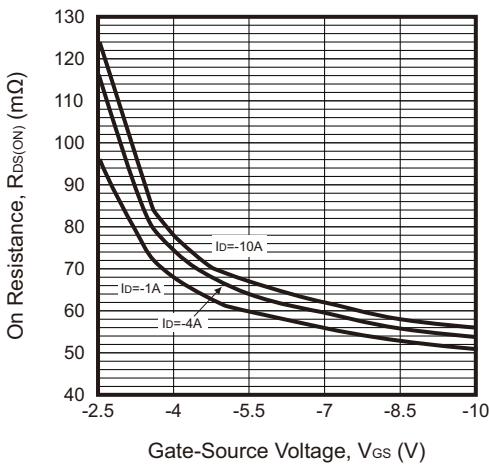


Fig.4 - Gate Threshold Voltage

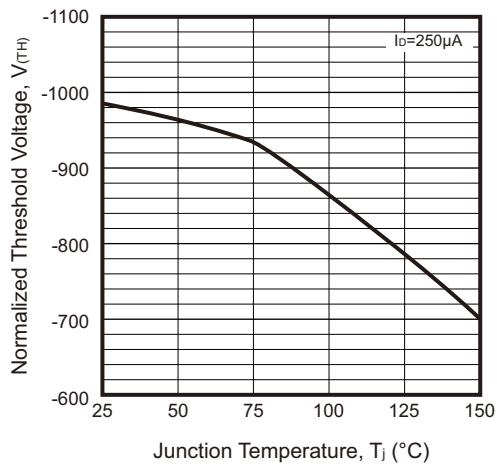


Fig.5 - Drain-Source on Resistance


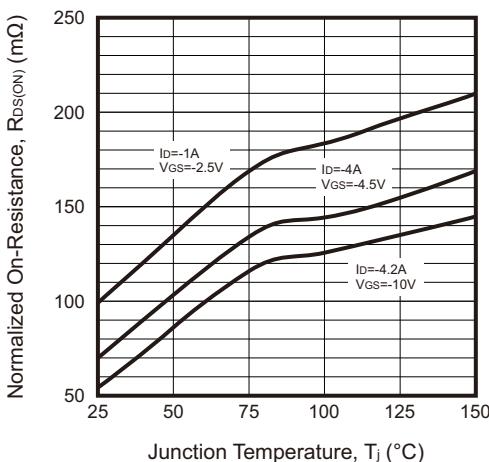



Fig.6 - Capacitance

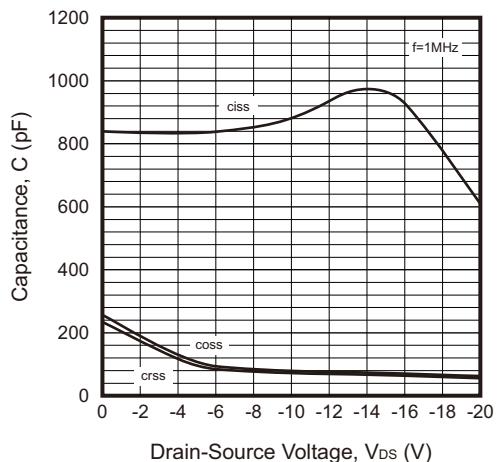

Company reserves the right to improve product design , functions and reliability without notice.

REV:A

Reel Taping Specification

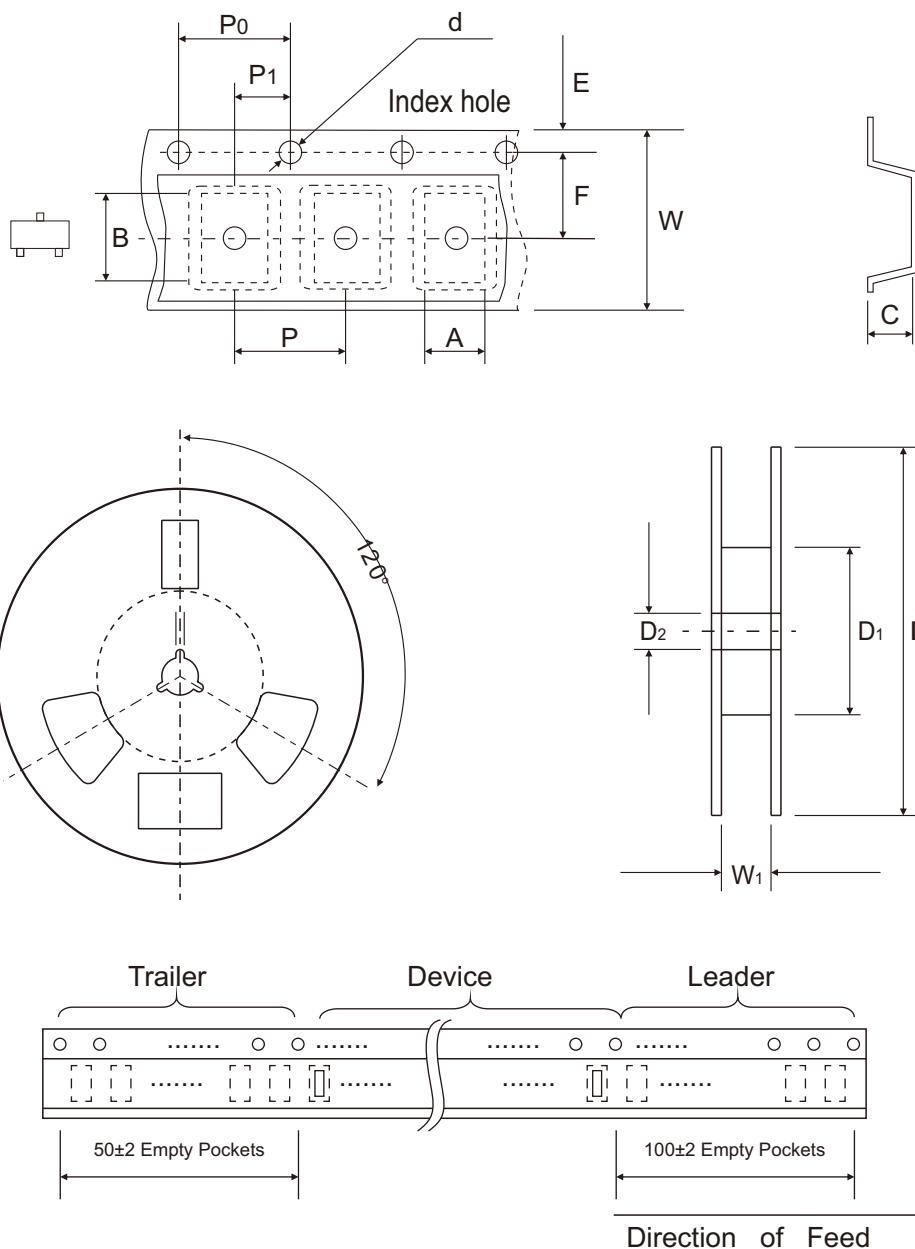

	SYMBOL	A	B	C	d	D	D1	D2
SOT-23	(mm)	3.15 ± 0.10	2.77 ± 0.10	1.22 ± 0.10	1.50 ± 0.10	178.00 ± 1.00	54.00 ± 0.50	13.00 ± 0.50
	(inch)	0.124 ± 0.004	0.109 ± 0.004	0.048 ± 0.004	0.059 ± 0.004	7.008 ± 0.039	2.126 ± 0.020	0.512 ± 0.020


	SYMBOL	E	F	P	P0	P1	W	W1
SOT-23	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	8.00 ± 0.30 -0.10	9.50 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.315 ± 0.012 -0.004	0.374 ± 0.039

Company reserves the right to improve product design , functions and reliability without notice.

REV:A


Marking Code

Part Number	Marking Code
ACMSP3401-HF	3401A



Suggested P.C.B. PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.90	0.035
B	0.80	0.031
C	0.95	0.037
D	2.00	0.079
E	2.90	0.114

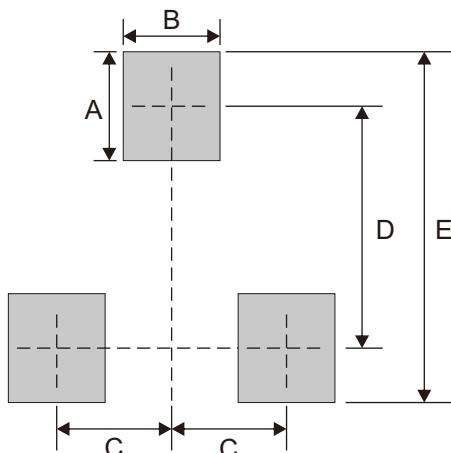

Note: 1. The pad layout is for reference purposes only.

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7