


ABCP55-16-HF (NPN)

RoHS Device
Halogen Free





Features

- High collector current.
- Low collector-emitter saturation voltage.
- AEC-Q101 Qualified.

Mechanical data

- Case: SOT-223, molded plastic.
- Mounting position: Any.

Circuit Diagram

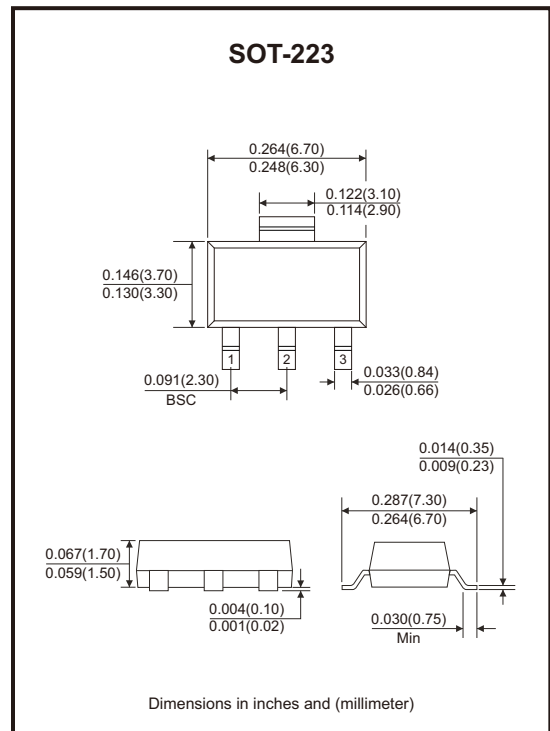

Maximum Ratings (at T_J=25°C unless otherwise noted)

Parameter	Symbol	ABCP55-16-HF	Unit
Collector-base voltage	V _{CBO}	60	V
Collector-emitter voltage	V _{CEO}	60	V
Emitter-base voltage	V _{EBO}	5	V
Collector continuous current (Note 1)	I _C	1	A
Peak pulsed collector current	I _{CM}	2	A
Base continuous current	I _B	100	mA
Peak pulsed base current	I _{BM}	200	mA
Collector power dissipation (Note 1)	P _C	1.5	W
Thermal resistance from junction to ambient (Note 2)	R _{θJA}	83.3	°C/W
Operation junction and storage temperature range	T _J , T _{STG}	-55 to +150	°C

Notes: 1. Maximum allowed temperature T_J=25°C.

2. Measured with the device mounted on 1 inch² FR-4 board with 1oz. copper, in a still air environment with T_a=25°C.

Electrical Characteristics (at $T_J=25^\circ\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Collector-base breakdown voltage	$I_C = 0.1\text{mA}$, $I_E = 0\text{A}$	$V_{(BR)CBO}$	60			V
Collector-emitter breakdown voltage	$I_C = 10\text{mA}$, $I_B = 0\text{A}$	$V_{(BR)CEO}$	60			V
Emitter-base breakdown voltage	$I_E = 10\mu\text{A}$, $I_C = 0\text{A}$	$V_{(BR)EBO}$	5			V
Collector-base cut-off current	$V_{CB} = 30\text{V}$, $I_E = 0\text{A}$	I_{CBO}			100	nA
DC current gain	$V_{CE} = 2\text{V}$, $I_C = 5\text{mA}$	$h_{FE(1)}$	25			
	$V_{CE} = 2\text{V}$, $I_C = 150\text{mA}$	$h_{FE(2)}$	100		250	
	$V_{CE} = 2\text{V}$, $I_C = 500\text{mA}$	$h_{FE(3)}$	25			
Collector-emitter saturation voltage	$I_C = 500\text{mA}$, $I_B = 50\text{mA}$	$V_{CE(sat)}$			0.5	V
Base-emitter voltage	$I_C = 500\text{mA}$, $V_{CE} = 2\text{V}$	V_{BE}			1	V
Transition frequency	$V_{CE} = 10\text{V}$, $I_C = 50\text{mA}$, $f = 100\text{MHz}$	f_T	100			MHz

Typical Rating and Characteristic Curves (ABCP55-16)

Fig.1 - Static Characteristic


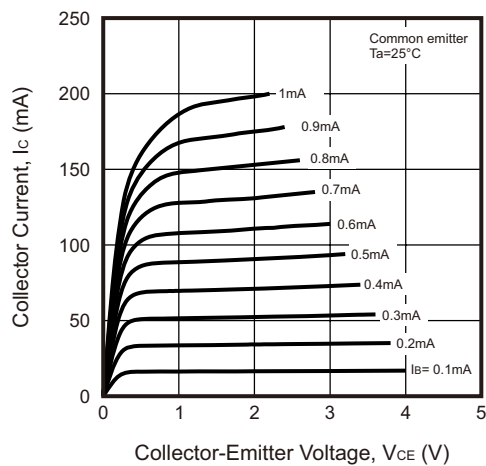


Fig.2 - $h_{FE} — I_C$

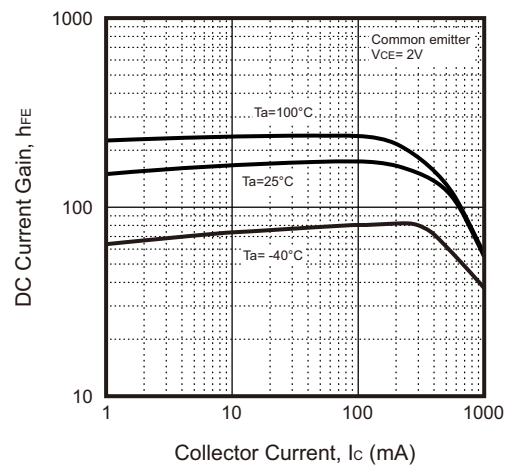

Typical Rating and Characteristic Curves (ABCP55-16)

Fig.3 - V_{CEsat} — I_c

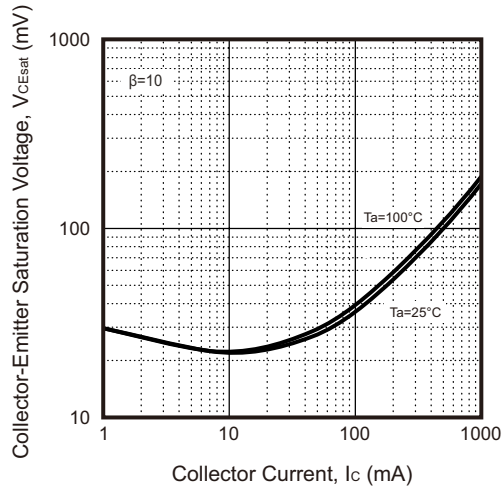


Fig.4 - V_{BEsat} — I_c

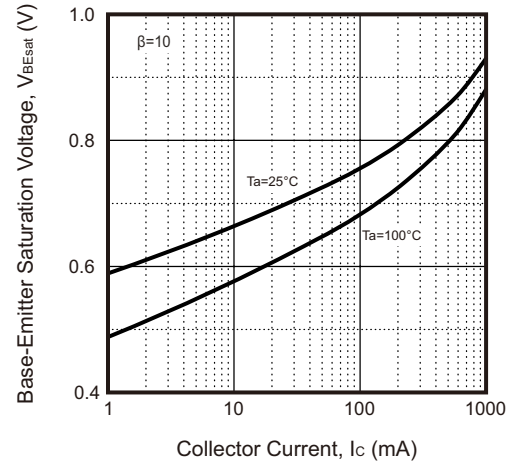


Fig.5 - I_c — V_{BE}

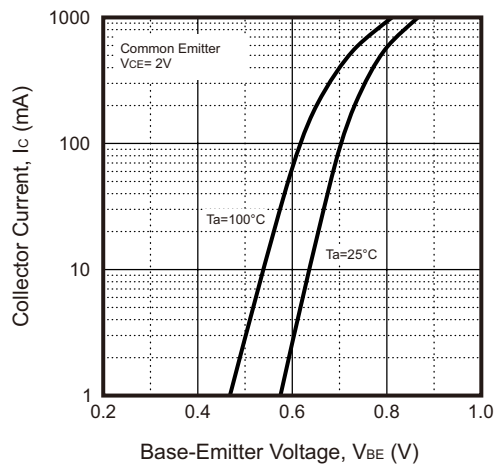


Fig.6 - C_{ob}/C_{ib} — V_{CB}/V_{EB}

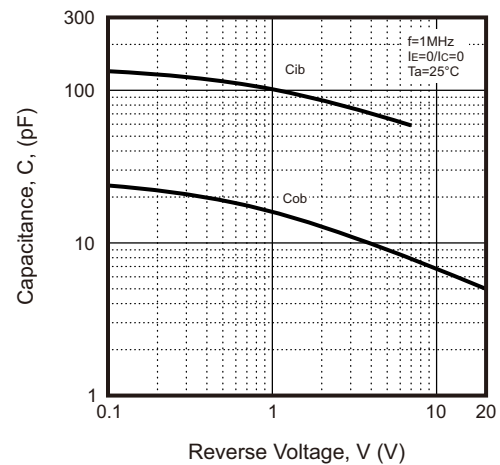


Fig.7 - f_r — I_c



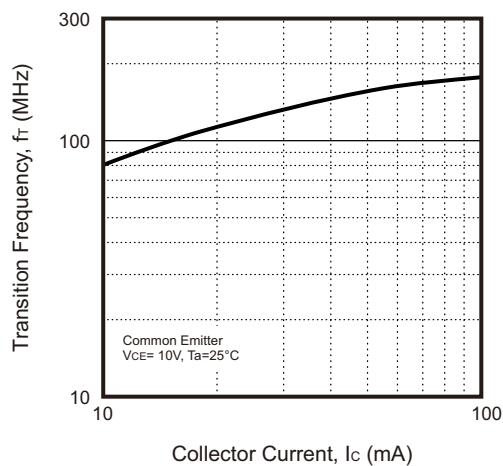


Fig.8 - P_c — T_a

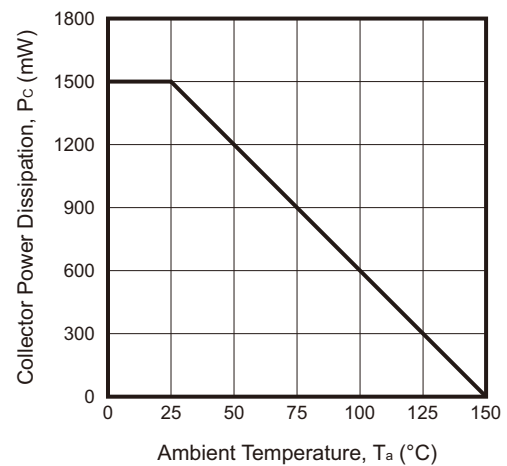

Reel Taping Specification

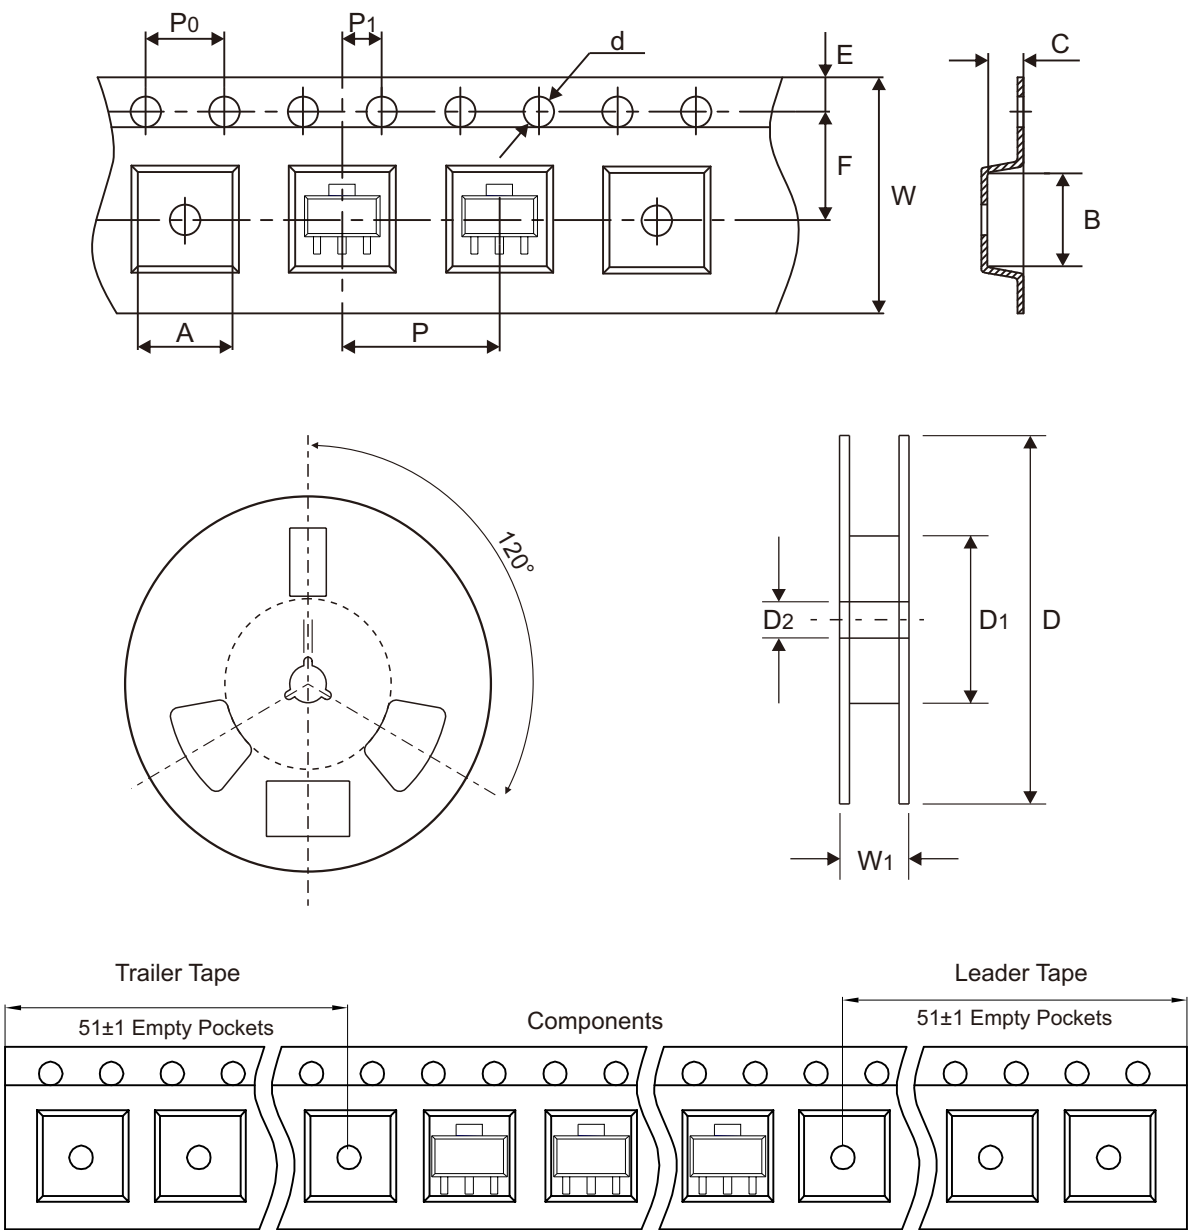


SOT-223	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	6.765 ± 0.10	7.335 ± 0.10	1.88 ± 0.10	1.50 + 0.10 - 0.00	330.00 ± 1.00	100.00 ± 0.05	13.00 ± 0.02
	(inch)	0.266 ± 0.004	0.289 ± 0.004	0.074 ± 0.004	0.059 + 0.004 - 0.000	12.992 ± 0.039	3.937 ± 0.002	0.512 ± 0.001

SOT-223	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	5.50 ± 0.05	8.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	12.00 + 0.30 - 0.10	17.60 ± 1.00
	(inch)	0.069 ± 0.004	0.217 ± 0.002	0.315 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.472 + 0.012 - 0.004	0.693 ± 0.039


Marking Code

Part Number	Marking Code
ABCP55-16-HF	BCP55-16



Suggested P.C.B. PAD Layout

SIZE	SOT-223	
	(mm)	(inch)
A	0.75	0.030
B	1.60	0.063
C	2.30	0.091
D	4.55	0.179
E	3.40	0.134
F	6.15	0.242
G	7.75	0.305

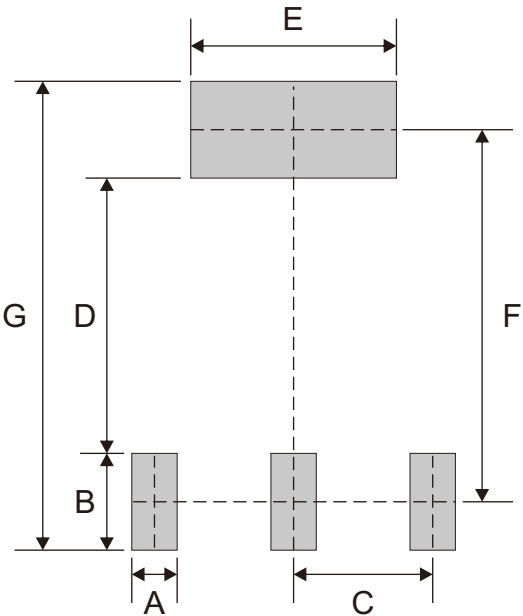

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-223	2,500	13