


CJ3401-HF

P-Channel
RoHS Device
Halogen Free





Features

- High dense cell design for extremely low $R_{DS(ON)}$
- Exceptional on-resistance and maximum DC current capability.

Mechanical data

- Case: SOT-23, molded plastic.
- Terminals: Solderable per MIL-STD-750, method 2026.

Circuit diagram

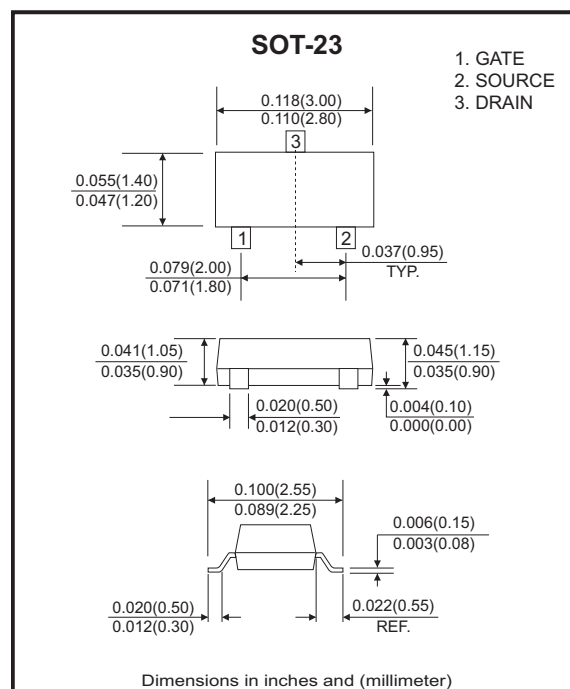

Maximum Ratings (at $T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Units
Maximum drain-source voltage	V_{DS}	-30	V
Maximum gate-source voltage	V_{GS}	± 12	V
Maximum continuous drain current	I_D	-4.2	A
Maximum power dissipation	P_D	350	mW
Thermal resistance from junction to ambient ($t < 5s$)	$R_{\theta JA}$	357	$^{\circ}\text{C/W}$
Junction temperature	T_J	150	$^{\circ}\text{C}$
Storage temperature	T_{STG}	-55 to +150	$^{\circ}\text{C}$

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Off characteristics						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} =0V , I _D =-250μA	-30			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =-24V , V _{GS} =0V			-1	μA
Gate-source leakage current	I _{GSS}	V _{GS} =±12V , V _{DS} =0V			±100	nA
On characteristics						
Drain-source on-resistance (note 1)	R _{DS(on)}	V _{GS} =-10V , I _D =-4.2A		48	65	mΩ
		V _{GS} =-4.5V , I _D =-4A		62	75	mΩ
		V _{GS} =-2.5V , I _D =-1A		88	90	mΩ
Forward transconductance (note 1)	g _{FS}	V _{DS} =-5V , I _D =-5A	7			S
Gate threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250μA	-0.7		-1.3	V
Dynamic characteristics (note 2)						
Input capacitance	C _{iss}	V _{DS} =-15V , V _{GS} =0V, f=1MHZ		954		pF
Output capacitance	C _{oss}			115		pF
Reverse transfer capacitance	C _{rss}			77		pF
Switching Characteristics (note 2)						
Turn-on delay time	t _{d(on)}	V _{GS} =-10V , V _{DS} =-15V R _L =3.6Ω , R _{GEN} =6Ω			6.3	nS
Turn-on rise time	t _r				3.2	nS
Turn-off delay time	t _{d(off)}				38.2	nS
Turn-off fall time	t _r				12	nS
Drain-source diode characteristics and maximum ratings						
Diode forward voltage (note 1)	V _{SD}	I _S =-1A , V _{GS} =0V			-1	V

Note:

1. Pulse Test: Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
2. These parameters have no way to verify.

RATING AND CHARACTERISTIC CURVES (CJ3401-HF)

Fig.1 - Output Characteristics

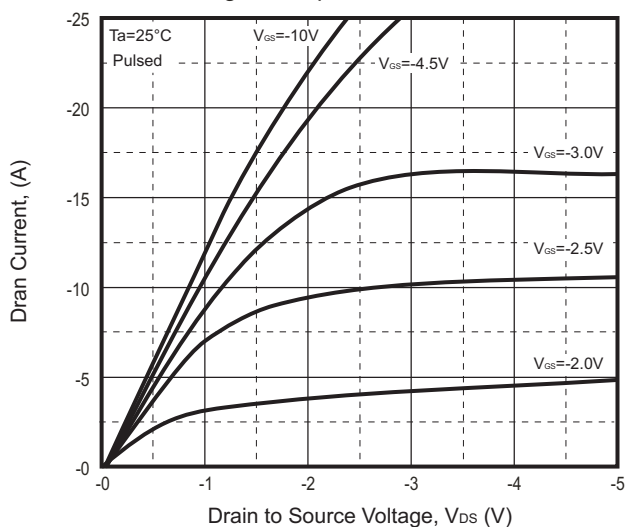


Fig.2 - Transfer Characteristics

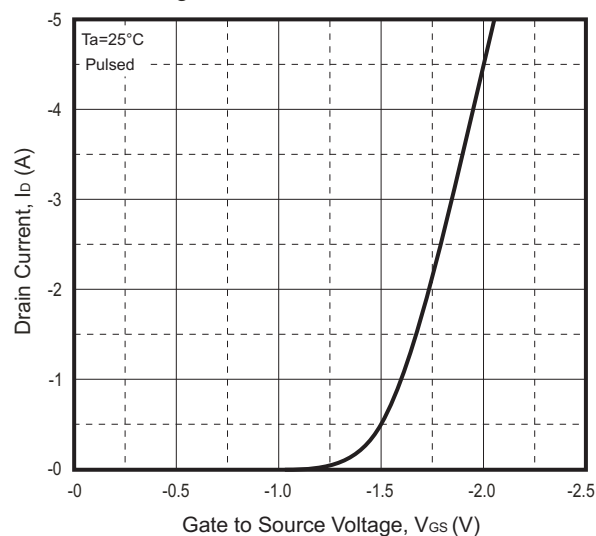


Fig.3 - $R_{DS(ON)} - I_D$

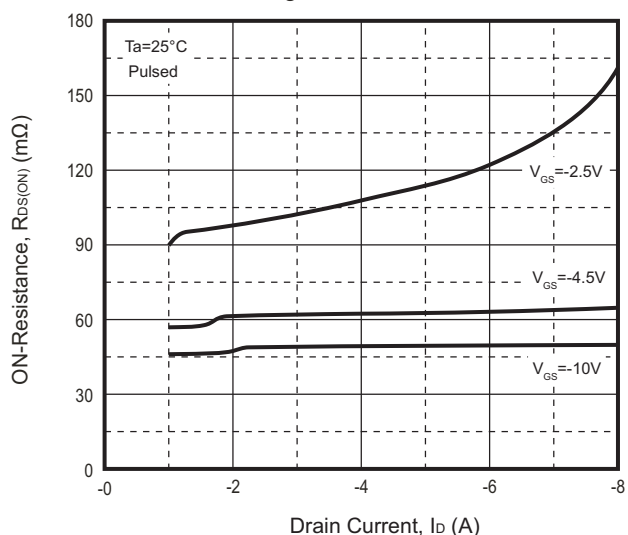


Fig.4 - $R_{DS(ON)} - V_{GS}$


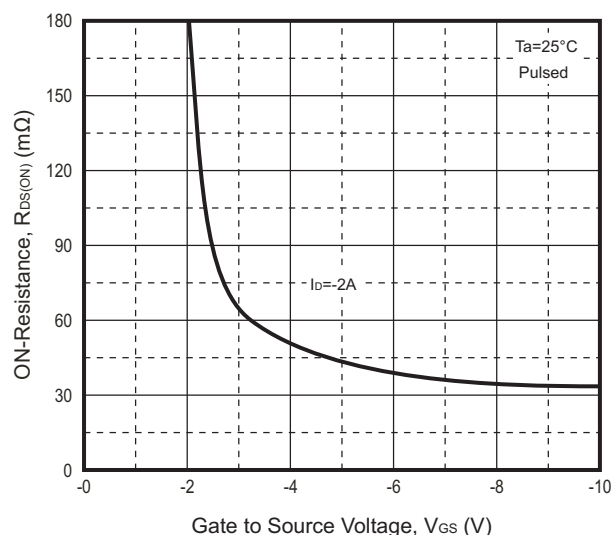




Fig.5 - $I_S - V_{SD}$

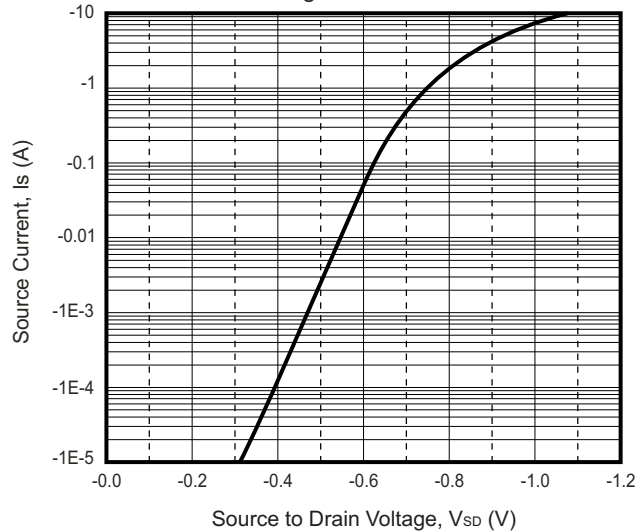

Company reserves the right to improve product design, functions and reliability without notice.

REV: C

Reel Taping Specification

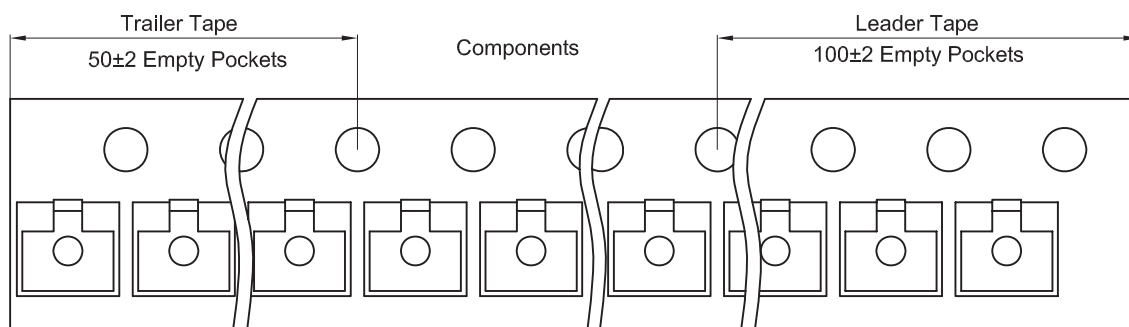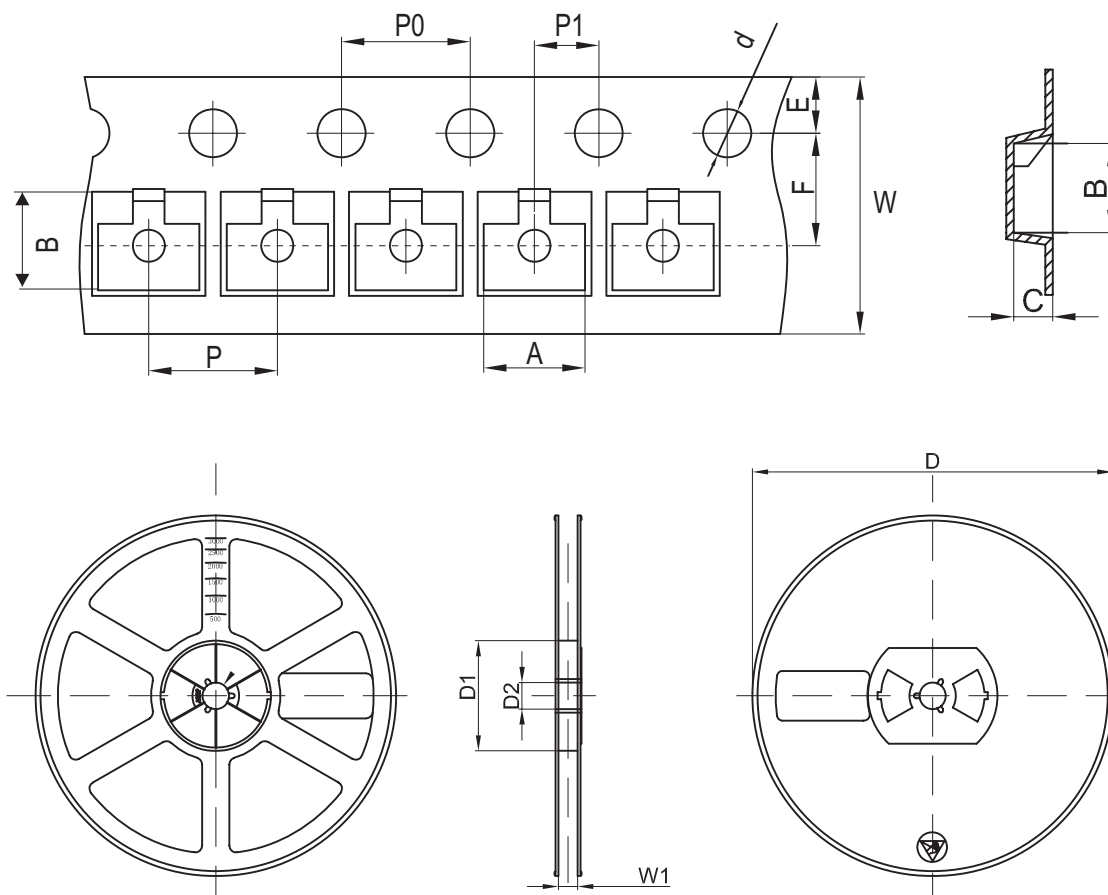

SOT-23	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.15 ± 0.10	2.77 ± 0.10	1.22 ± 0.10	1.50 ± 0.10	178 ± 2.0	54.40 ± 1.0	13.00 ± 1.0
	(inch)	0.124 ± 0.004	0.109 ± 0.004	0.048 ± 0.004	0.059 ± 0.004	7.008 ± 0.079	2.142 ± 0.039	0.512 ± 0.039


SOT-23	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	$8.00 \pm 0.30 / - 0.10$	9.50 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.158 ± 0.004	0.158 ± 0.004	0.079 ± 0.004	$0.315 \pm 0.012 / - 0.004$	0.374 ± 0.039

Company reserves the right to improve product design , functions and reliability without notice.

REV: C

Marking Code


Part Number	Marking Code	
CJ3401-HF	R1	3401



XX/XXXX = Product type marking code

Suggested PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.80	0.031
B	0.60	0.024
C	1.90	0.075
D	2.02	0.080

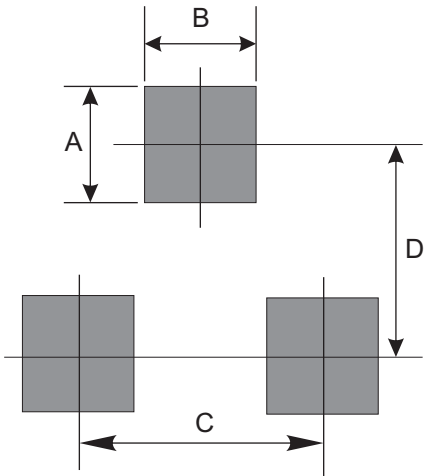

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7