

CPDA10R3V3U-HF

RoHS Device

Halogen Free


Features

- IEC61000-4-2 (ESD)±12kV(Contact),±15kV(Air).
- Working voltage: 3.3 V
- Low leakage current.
- Low capacitance: 0.4 pF typical (I/O to GND)



Mechanical data

- Case: DFN10p package,molded plastic.
- Terminals: Gold plated, solderable per MIL-STD-750,method 2026.
- Mounting position: Any

Circuit Diagram

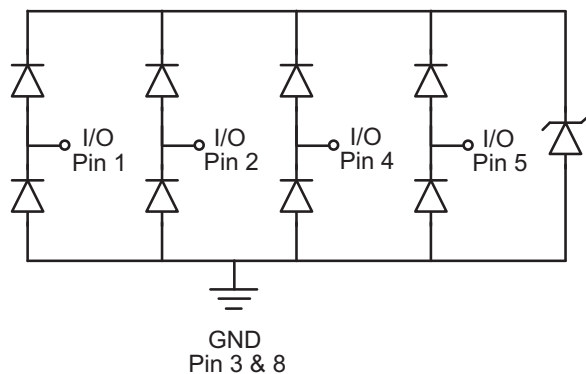

Package

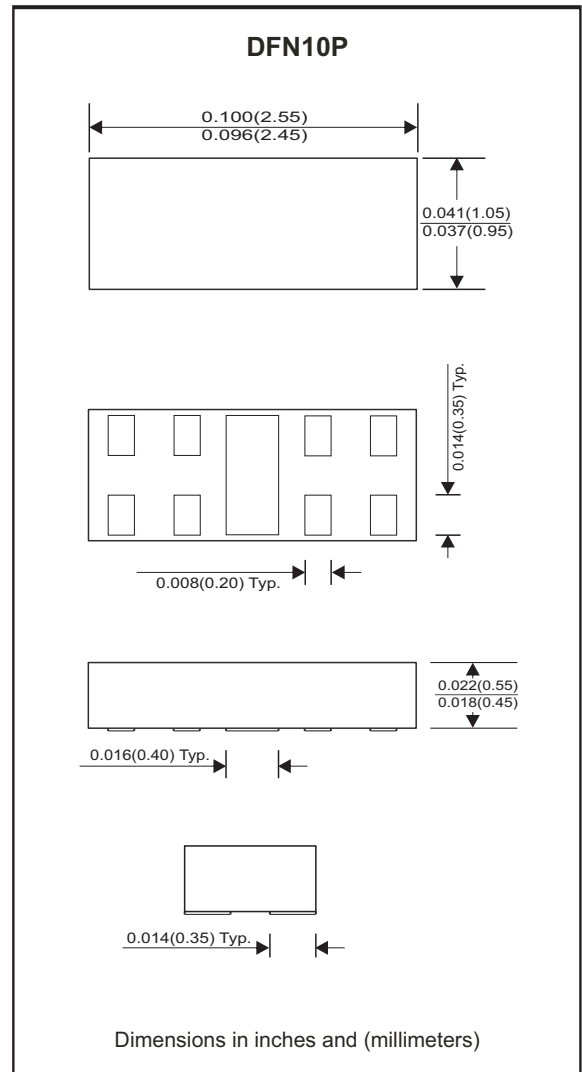

Maximum Rating (at $T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak pulse power ($t_p = 8/20 \text{ us}$)	P _{PP}	39.2	W
Peak pulse current ($t_p = 8/20 \text{ us}$)	I _{PP}	4	A
ESD per IEC 61000-4-2(Air) ESD per IEC 61000-4-2(Contact)	ESD	15 12	kV
Operating temperature	T _J	-55 to +125	°C
Storage temperature	T _{STG}	-55 to +150	°C

Electrical Characteristics (at $T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Reverse stand-off voltage		V _{RWM}			3.3	V
Breakdown Voltage	I _T = 1 mA	V _{BR}	4	4.7		V
Leakage current	V _{RWM} = 3.3V	I _R			1	uA
Clamping voltage	I _{PP} = 1A, T _P = 8/20us, Any Channel Pin to Ground	V _C		6.3		V
	I _{PP} = 4A, T _P = 8/20us, Any Channel Pin to Ground	V _C		9.8		V
Junction capacitance	V _R = 0V, f = 1MHz Any Channel Pin to Ground	C _j		0.4		pF

RATING AND CHARACTERISTIC CURVES (CPDA10R3V3U-HF)

Fig.1 - 8/20us Peak Pulse Current
Waveform ACC. IEC 61000-4-5

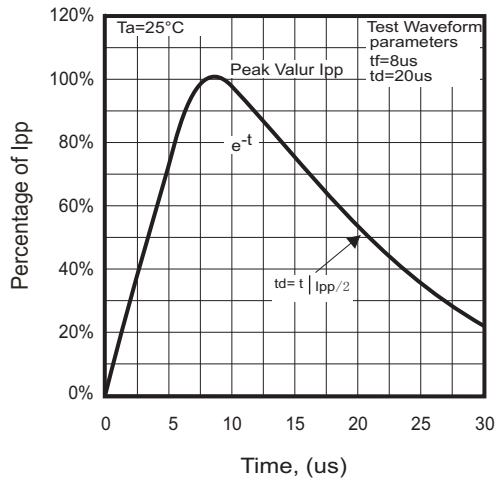


Fig.2 - Forward Characteristics

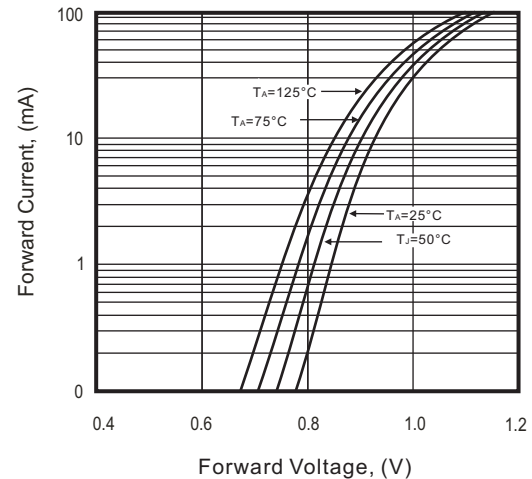


Fig.3 - Clamping Voltage Vs.
Peak Pulse Current

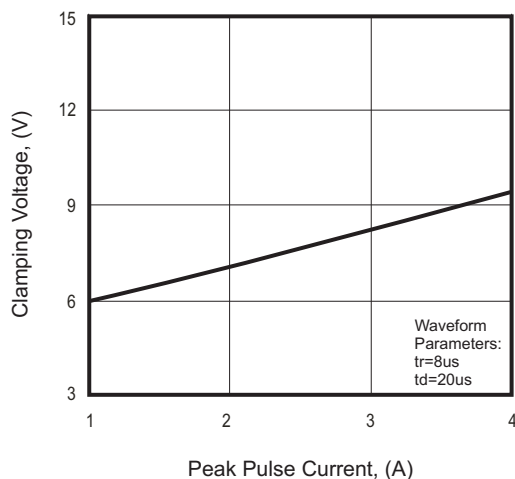


Fig.4 - Power Rating Derating Curve



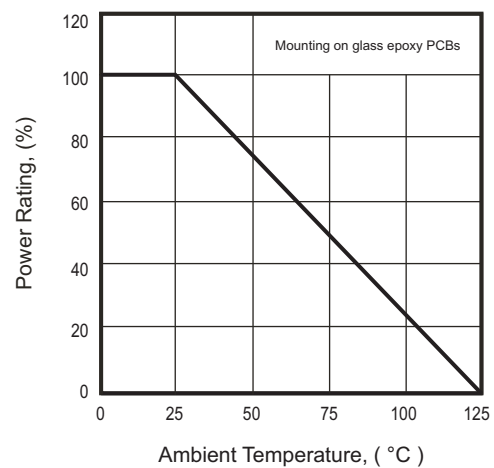


Fig.5 - Typical Capacitance Between
Terminals Characteristics

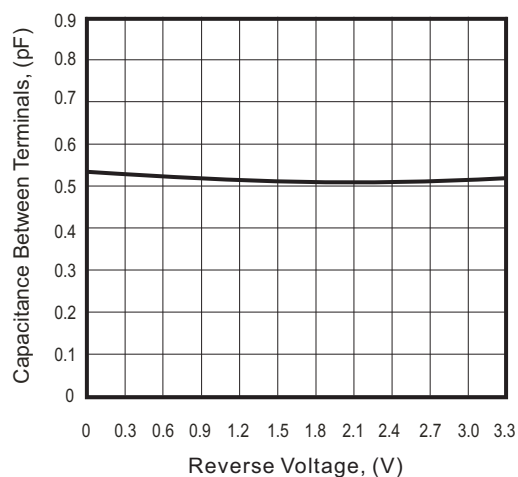

Reel Taping Specification

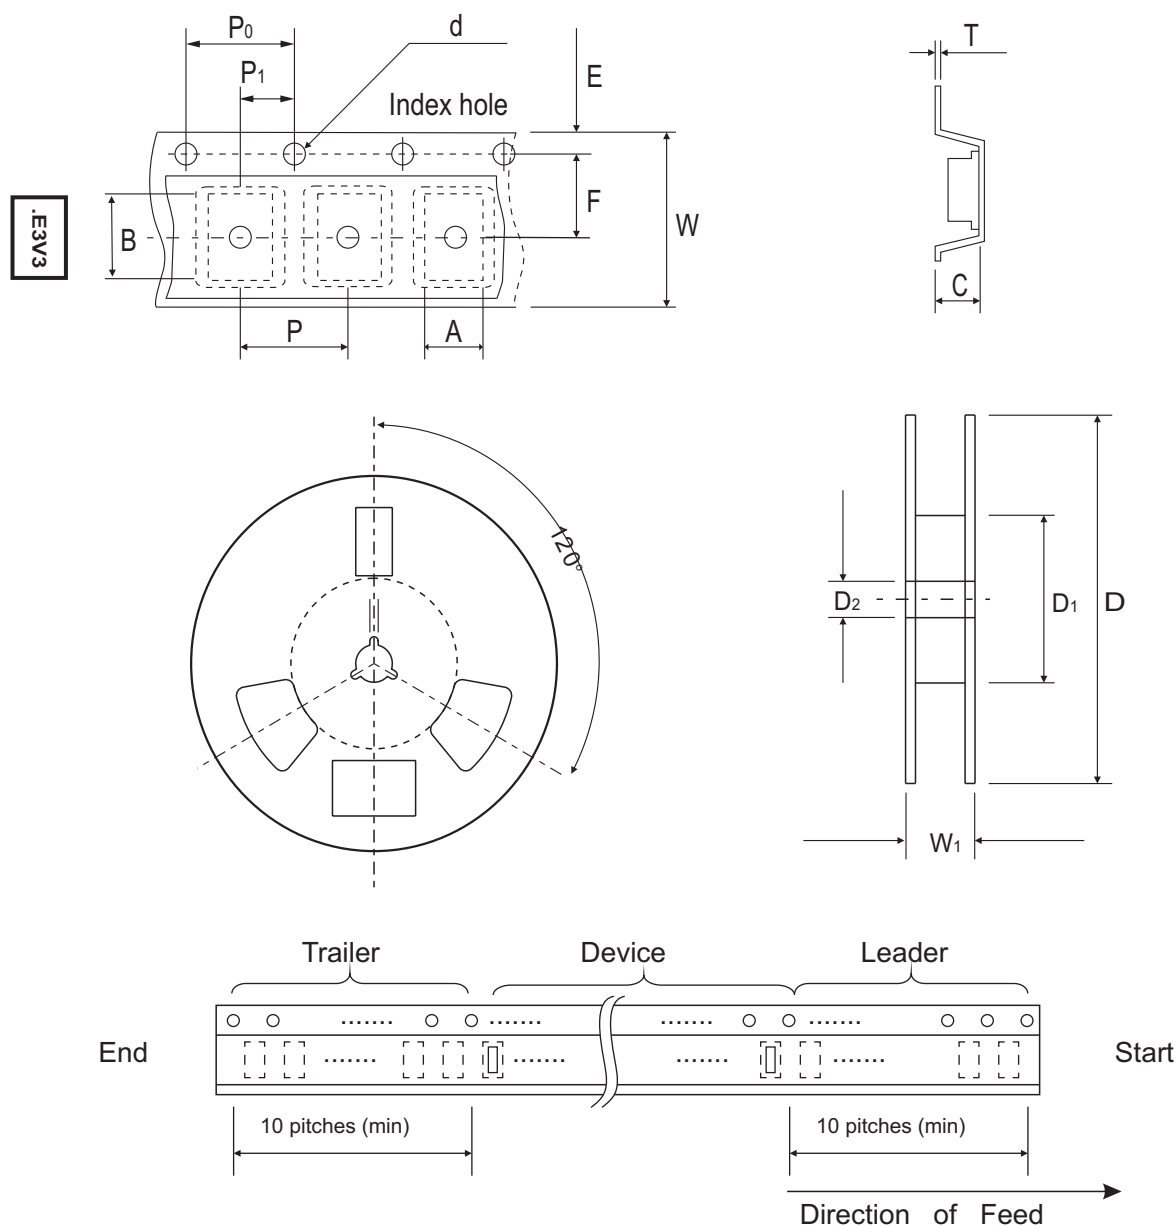

DFN10P	SYMBOL	A	B	C	d	D	D ¹	D ²
	(mm)	1.14 ± 0.05	2.64 ± 0.05	0.64 ± 0.05	1.50 + 0.10 - 0	178.00 ± 1.00	60.00 + 0.50 - 0	13.00 ± 0.20
	(inch)	0.045 ± 0.002	0.104 ± 0.002	0.025 ± 0.002	0.059 + 0.004 - 0	7.008 ± 0.039	2.362 + 0.020 - 0	0.512 ± 0.008


DFN10P	SYMBOL	E	F	P	P ₀	P ₁	T	W	W ₁
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	0.20 ± 0.05	8.00 ± 0.30	12.00 ± 0.15
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.008 ± 0.002	0.315 ± 0.012	0.472 ± 0.006

Company reserves the right to improve product design , functions and reliability without notice.

REV:A


Marking Code

Part Number	Marking Code
CPDA10R3V3U-HF	.E3V3



Suggested PAD Layout

SIZE	DFN10P	
	(mm)	(inch)
A	2.30	0.091
B	1.00	0.039
C	0.38	0.015
D	0.30	0.012
E	0.30	0.012
F	0.50	0.020
G	0.24	0.009

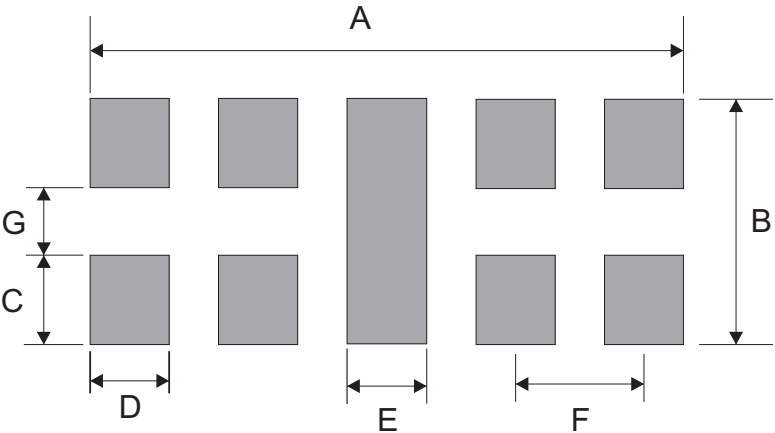

Standard Packaging

Case Type	Qty Per Reel	Reel Size
	(Pcs)	(inch)
DFN10P	3,000	7