


Glass Passivated Bridge Rectifiers

GBJ15005-G Thru. GBJ1510-G

Reverse Voltage: 50 to 1000V

Forward Current: 15 A

RoHS Device




Features

- Rating to 1000V PRV.
- Ideal for printed circuit board.
- Low forward voltage drop.
- High current capability.
- UL recognized file # E349301 

Mechanical Data

- Epoxy: UL 94V-0 rate flame retardant.
- Case: Molded plastic, GBJ
- Mounting position: Any
- Weight: 6.81grams

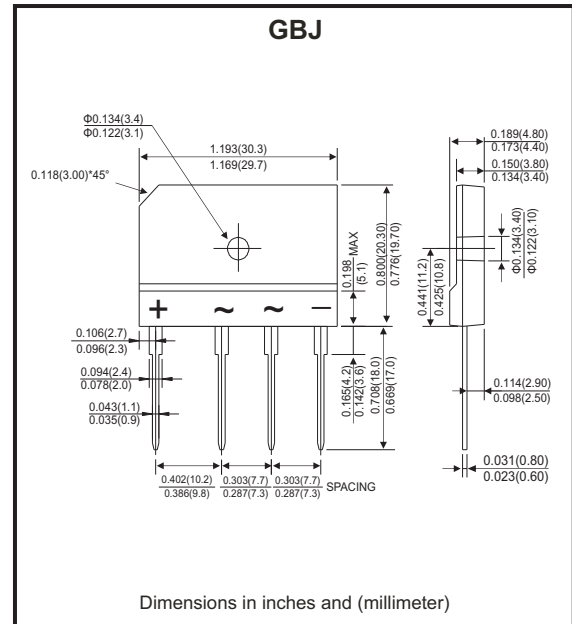

Maximum ratings and electrical characteristics

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave ,60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Parameter	Symbol	GBJ 15005-G	GBJ 1501-G	GBJ 1502-G	GBJ 1504-G	GBJ 1506-G	GBJ 1508-G	GBJ 1510-G	Unit
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward (with heatsink Note2) rectified current @Tc=100°C (without hestsink)	I_{AV}	15 3.7							A
Peak forward surage current , 8.3ms single half sine-wave super imposed on rated load (JEDEC Method)	I_{FSM}	240							A
Maximum forward voltage at 7.5A DC	V_F	1.0							V
Maximum DC reverse current @Tj=25°C at rated DC blocking voltage @Tj=125°C	I_R	10 500							μA
I ² t rating for fusing (t<8.3ms)	I ² t	240							A ² s
Typical junction capacitance per element (Note 1)	C_J	60							pF
Typical thermal resistance	$R_{θJC}$	0.8							°C/W
Operating temperature range	T_J	-55 to +150							°C
Storage temperature range	T_{STG}	-55 to +150							°C

Notes:

1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
2. Device mounted on 300mm*300mm*1.6mm Cu plate heatsink.

Company reserves the right to improve product design , functions and reliability without notice.

REV: A

Rating and Characteristics Curves (GBJ15005-G Thru. GBJ1510-G)

Fig.1 - Forward Current Derating Curve

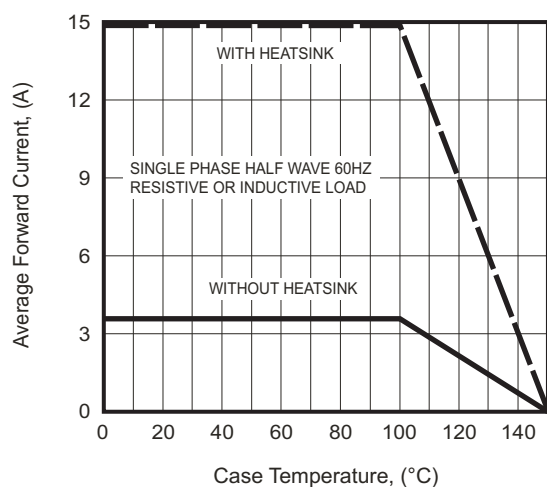


Fig.2 - Maximum Non-Repetitive Surge Current

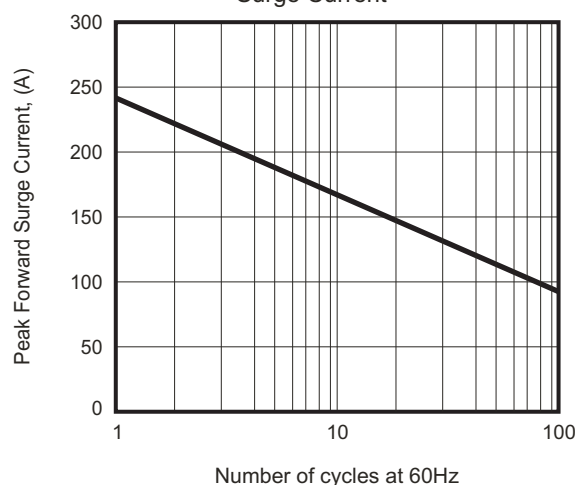


Fig.3 - Typical Junction Capacitance

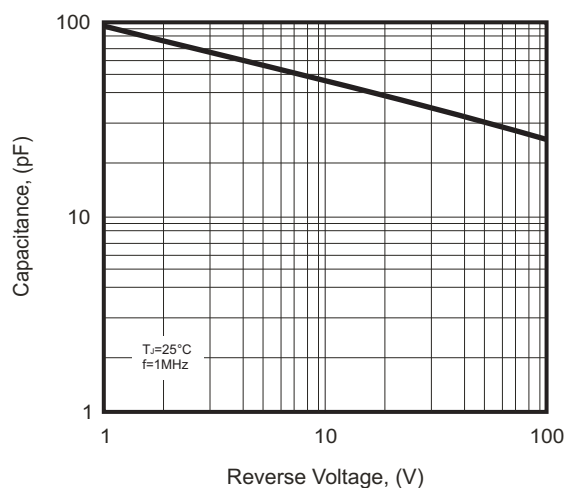


Fig.4 - Typical Forward Characteristics


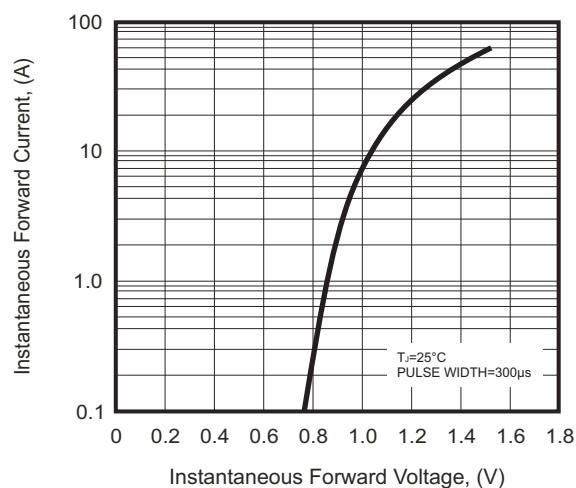


Fig.5 - Typical Reverse Characteristics

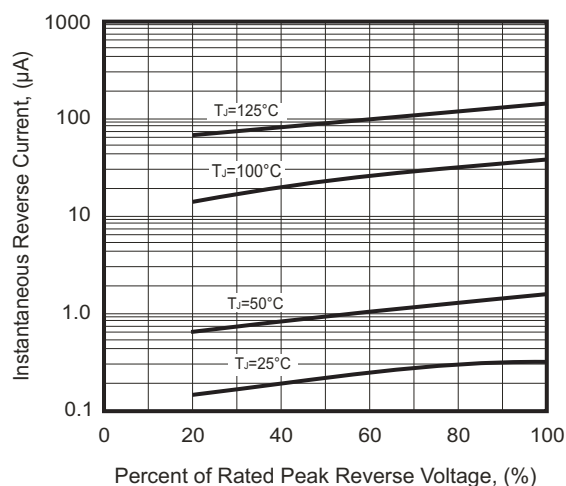


Company reserves the right to improve product design, functions and reliability without notice.

REV: A

Marking Code

Part Number	Marking code
GBJ15005-G	GBJ15005
GBJ1501-G	GBJ1501
GBJ1502-G	GBJ1502
GBJ1504-G	GBJ1504
GBJ1506-G	GBJ1506
GBJ1508-G	GBJ1508
GBJ1510-G	GBJ1510



XXX / XXXX = Product type marking code

C = Comchip Logo

Standard Packaging

Case Type	TUBE PACK	
	TUBE (pcs)	Carton (pcs)
GBJ	15	750