


CDBA5817-G Thru CDBA5819-G

Reverse Voltage: 20 - 40 Volts

Forward Current: 1A or 3 A

RoHS Device



Features

Ideal for surface mount applications.

Easy pick and place.

Plastic package has Underwriters Lab, flammability classification 94V-0.

Built-in strain relief.

Low forward voltage drop.


Mechanical data

Case: JEDEC DO-214AC, molded plastic.

Terminals: Solderable per MIL-STD-750, method 2026.

Polarity: Color band denotes cathode end.

-Approx. weight: 0.056 grams

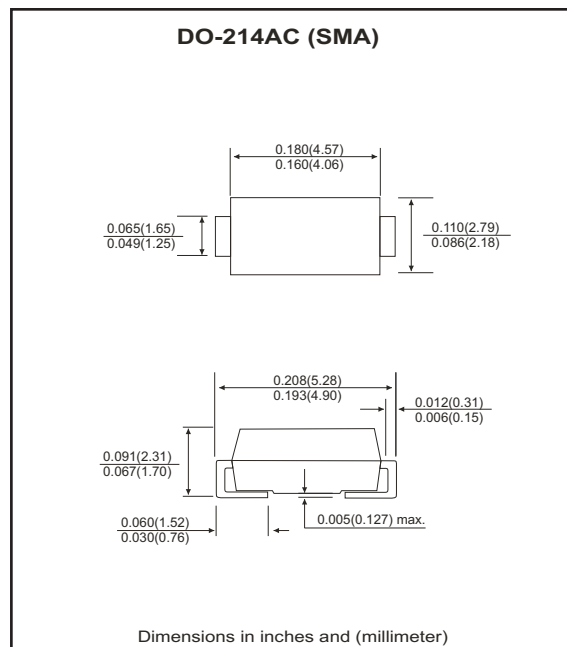

Maximum Ratings(at TA=25°C unless otherwise noted)

Parameter	Symbol	CDBA5817-G	CDBA5818-G	CDBA5819-G	Unit
Max. Repetitive Peak Reverse Voltage	V_{RRM}	20	30	40	V
Max. DC Blocking Voltage	V_{DC}	20	30	40	V
Max. RMS Voltage	V_{RMS}	14	21	28	V
Peak Surge Forward Current 8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I_{FSM}	25			A
Max. Average Forward Current	I_O	1			A
Max. Thermal Resistance	$R_{\theta JL}$	20			°C/W
Storage Temperature	T_{STG}	+125			°C
Max. Operating Junction Temperature	T_J	-65 to +150			°C

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Symbol	CDBA5817-G	CDBA5818-G	CDBA5819-G	Unit
Max. Forward Voltage at 1.0 A at 3.0 A	V_F	0.45 0.75	0.550 0.775	0.60 0.90	V
Max. DC Reverse Current at Rated DC Blocking Voltage $T_a = 25^\circ\text{C}$ $T_a = 100^\circ\text{C}$	I_R	0.5 20			mA
Typical Junction Capacitance	C_j	65			pF

RATING AND CHARACTERISTIC CURVES (CDBA5817-G Thru CDBA5819-G)

Fig. 1 - Forward characteristics

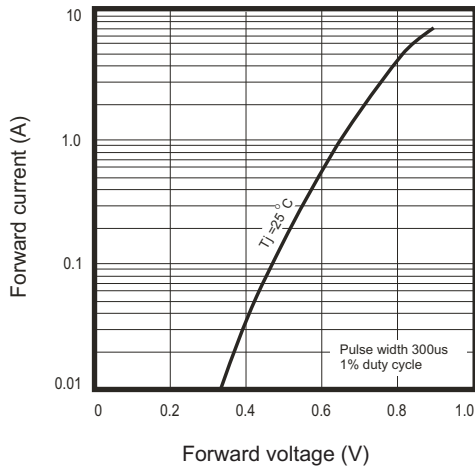


Fig. 2 - Reverse characteristics

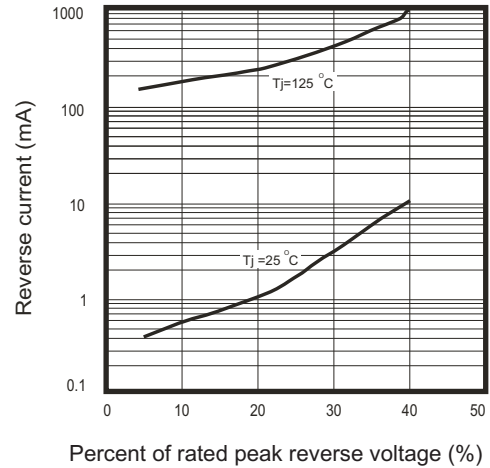


Fig.3 - Capacitance between terminals characteristics

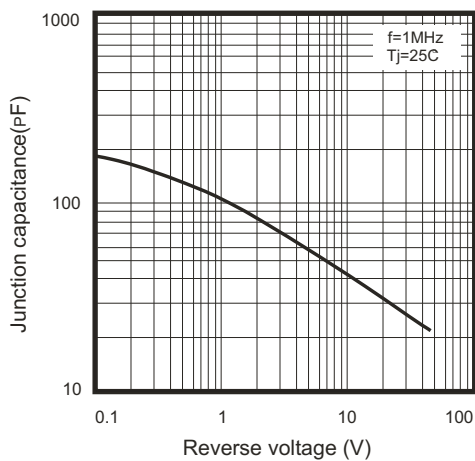


Fig.4 - Current derating curve



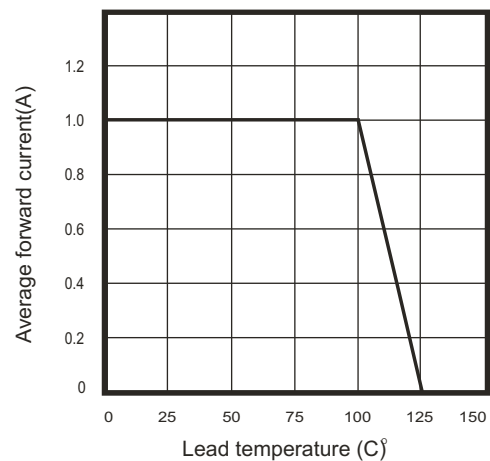


Fig.5 - Non repetitive peak forward surge current

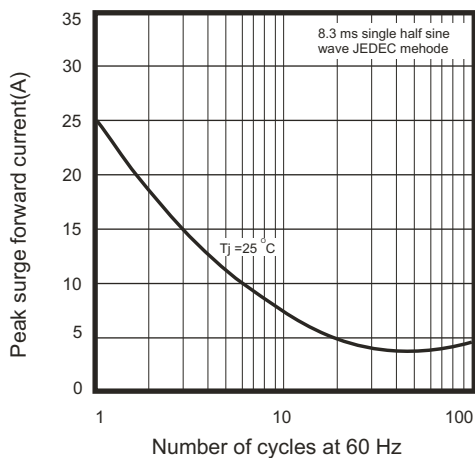

Reel Taping Specification

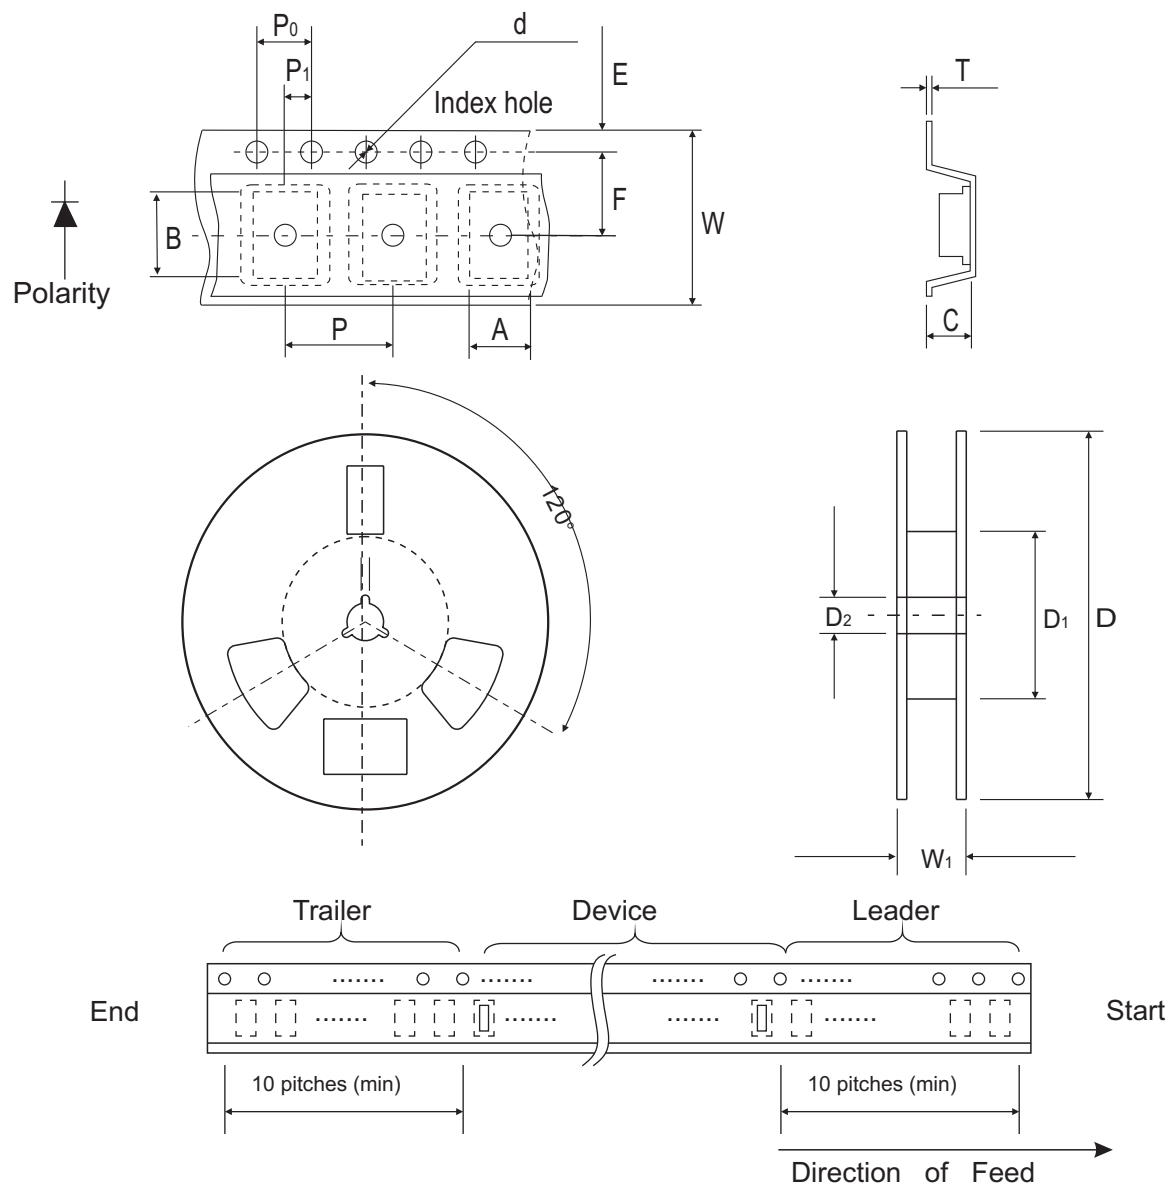

SMA (DO-214AC)	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	2.70 (max)	5.30 (max)	2.66 (max)	1.50 ± 0.10	330	50.0 MIN.	13.5 ± 1.00
	(inch)	0.106 (max)	0.209 (max)	0.105 (max)	0.059 ± 0.004	12.99	1.969 MIN.	0.531 ± 0.039

SMA (DO-214AC)	SYMBOL	E	F	P	P ₀	P ₁	W	W ₁
	(mm)	1.75 ± 0.10	5.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	12.0 ± 0.20	18.4 (max)
	(inch)	0.689 ± 0.004	0.217 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.472 ± 0.008	0.724 (max)

Marking Code


Part Number	Marking Code
CDBA5817-G	5817
CDBA5818-G	5818
CDBA5819-G	5819



xxxx = Product type marking code

Suggested PAD Layout

SIZE	DO-214AC(SMA)	
	(mm)	(inch)
A	3.80	0.150
B	1.60	0.063
C	2.80	0.110
D	5.40	0.213
E	2.20	0.087

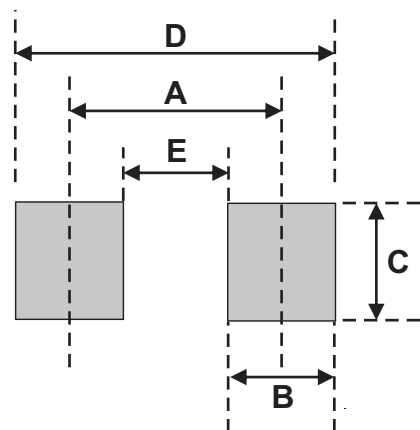

Standard Package

Case Type	Qty per Reel	Reel Size
	(Pcs)	(inch)
DO-214AC (SMA)	5000	13