


FMMT493-G (NPN) RoHS Device



Features



- Complementary type FMMT593.
- Low saturation voltage.
- High hFE Max. 300@250mA .
- Ic = 1A .

Mechanical data

- Case: SOT-23, molded plastic.
- Mounting position: Any.

Circuit Diagram

- 1 : BASE
- 2 : EMITTER
- 3 : COLLECTOR

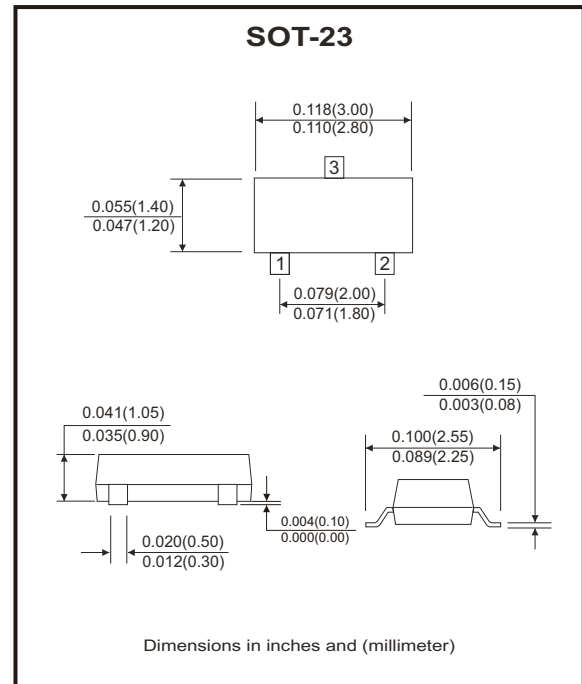

Maximum Ratings (at TA=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-base voltage	VCBO	120	V
Collector-emitter voltage	VCEO	100	V
Emitter-base voltage	VEBO	5	V
Collector current	Ic	1000	mA
Collector power dissipation	Pc	250	mW
Thermal resistance from junction to ambient	RθJA	500	°C/W
Junction temperature range	TJ	150	°C
Storage temperature range	Tstg	-55~+150	°C

Electrical Characteristics (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Collector-base breakdown voltage	$I_C = 100\mu\text{A}$, $I_E = 0$	$V_{(BR)CBO}$	120			V
Collector-emitter breakdown voltage	$I_C = 10\text{mA}$, $I_B = 0$	$V_{(BR)CEO}$	100			V
Emitter-base breakdown voltage	$I_E = 100\mu\text{A}$, $I_C = 0$	$V_{(BR)EBO}$	5			V
Collector cut-off current	$V_{CB} = 100\text{V}$, $I_E = 0$	I_{CBO}			0.1	μA
Collector cut-off current	$V_{CES} = 100\text{V}$, $I_E = 0$	I_{CES}			0.1	μA
Emitter cut-off current	$V_{EB} = 4\text{V}$, $I_C = 0$	I_{EBO}			0.1	μA
DC current gain	$V_{CE} = 10\text{V}$, $I_C = 1\text{mA}$	$h_{FE(1)*}$	100			
	$V_{CE} = 10\text{V}$, $I_C = 250\text{mA}$	$h_{FE(2)*}$	100		300	
	$V_{CE} = 10\text{V}$, $I_C = 0.5\text{A}$	$h_{FE(3)*}$	60			
	$V_{CE} = 10\text{V}$, $I_C = 1\text{A}$	$h_{FE(4)*}$	20			
Collector-emitter saturation voltage	$I_C = 500\text{mA}$, $I_B = 50\text{mA}$	$V_{CE(sat) 1*}$			0.3	V
	$I_C = 1\text{A}$, $I_B = 100\text{mA}$	$V_{CE(sat) 2*}$			0.6	V
Base-emitter saturation voltage	$I_C = 1\text{A}$, $I_B = 100\text{mA}$	$V_{BE(sat)*}$			1.15	V
Base-emitter voltage	$V_{CE} = 10\text{V}$, $I_C = 1\text{A}$	V_{BE*}			1	V
Transition frequency	$V_{CE} = 10\text{V}$, $I_C = 50\text{mA}$, $f = 100\text{MHz}$	f_T	150			MHz
Collector output capacitance	$V_{CB} = 10\text{V}$, $I_E = 0$, $f = 1\text{MHz}$	C_{ob}			10	pF

*Pulse test: pulse width $\leq 300\mu\text{s}$, duty cycles $\leq 2.0\%$

Rating and Characteristic Curves (FMMT493-G)

Fig.1 - Static Characteristic


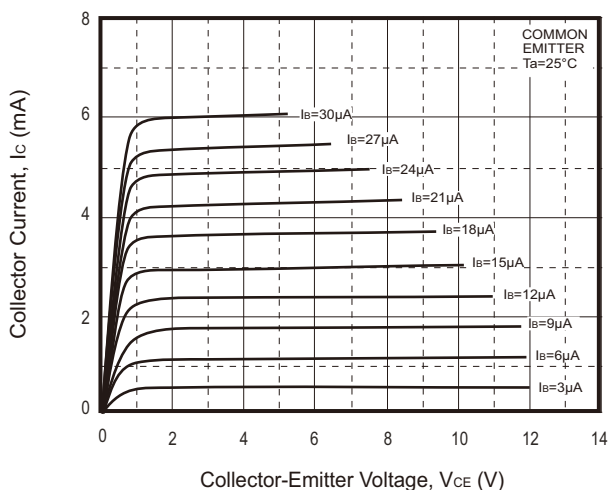


Fig.2 - $h_{FE} - I_C$

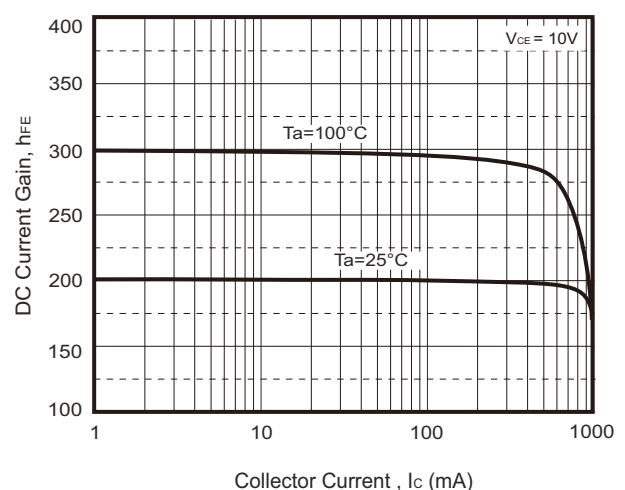

Rating and Characteristic Curves (FMMT493-G)

Fig.3 - $V_{BEsat} - I_c$

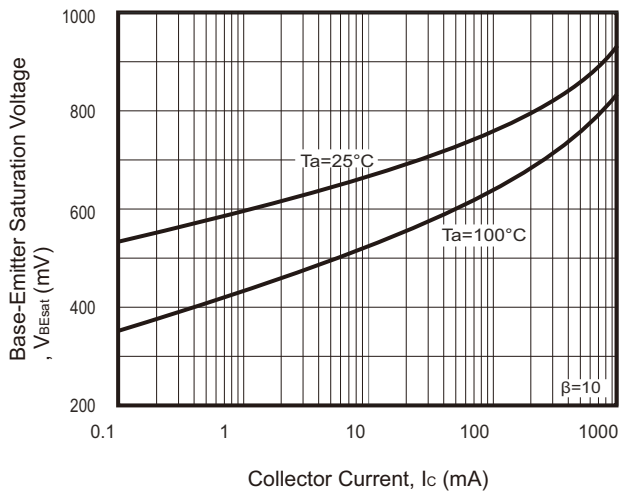


Fig.4- $V_{CEsat} - I_c$

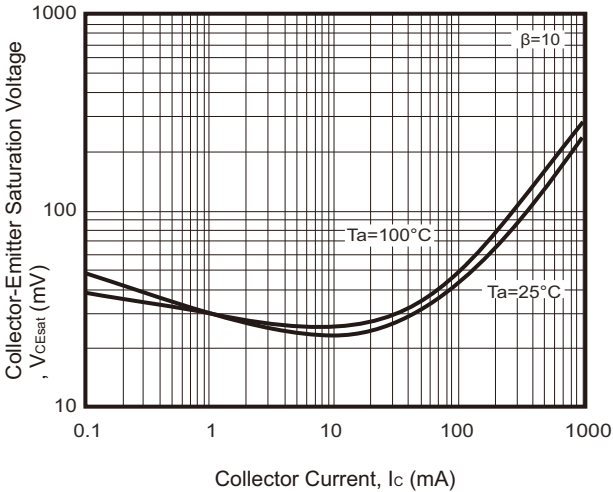


Fig.5 - $f_r - I_c$

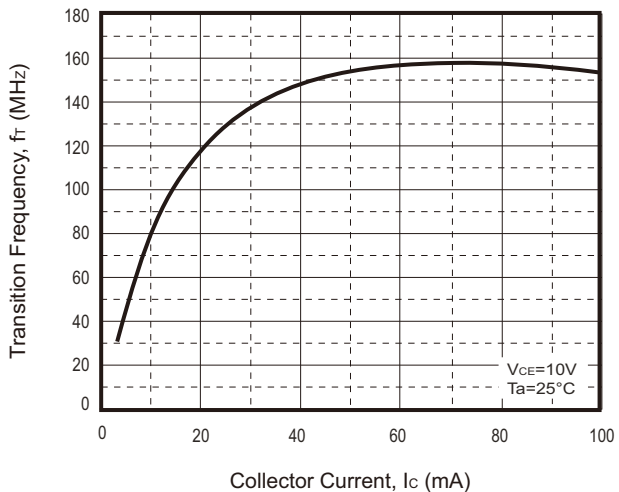


Fig.6 - $I_c - V_{BE}$



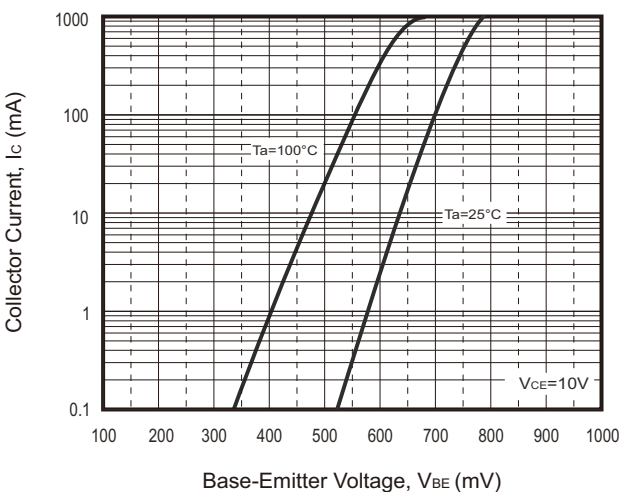


Fig.7 - $P_c - T_a$

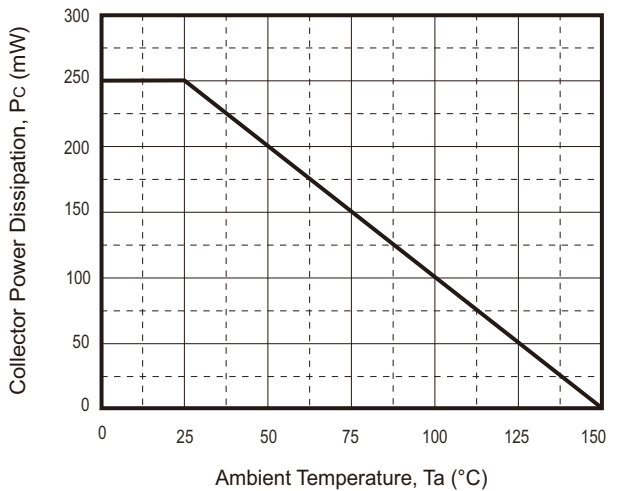

Reel Taping Specification

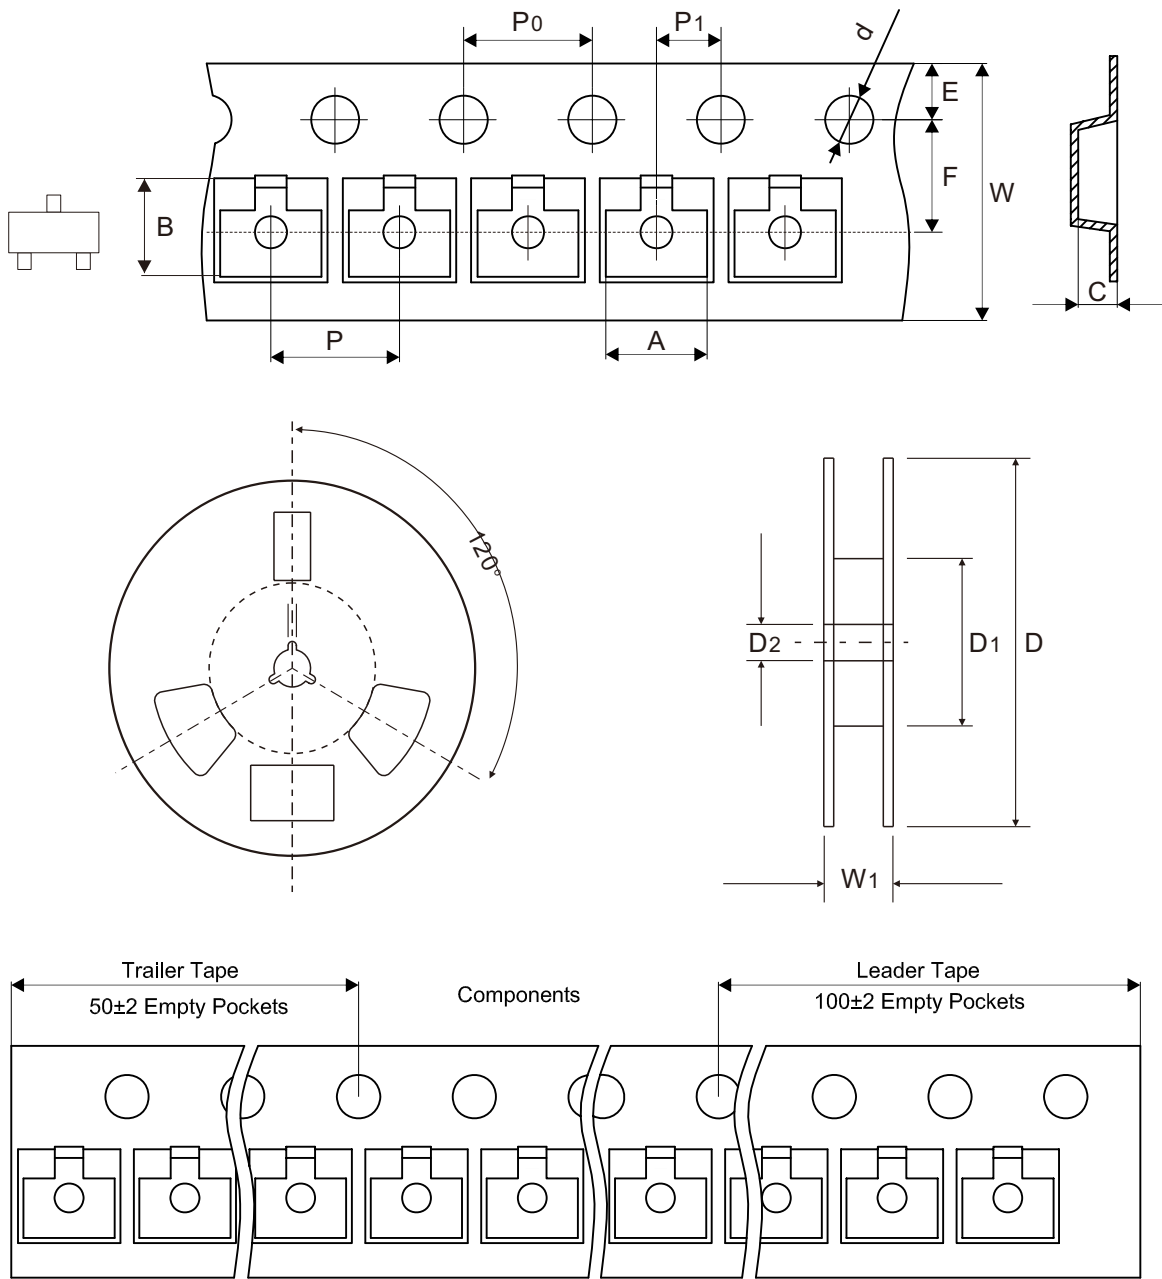


SOT-23	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.15 ± 0.10	2.77 ± 0.10	1.22 ± 0.10	1.50 ± 0.10	178.00 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.124 ± 0.004	0.109 ± 0.004	0.048 ± 0.004	0.059 ± 0.004	7.008 ± 0.079	2.142 ± 0.039	0.512 ± 0.039

SOT-23	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	8.00 + 0.30 - 0.10	12.30 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.315 + 0.012 - 0.004	0.484 ± 0.039

Marking Code


Part Number	Marking Code
FMMT493-G	493

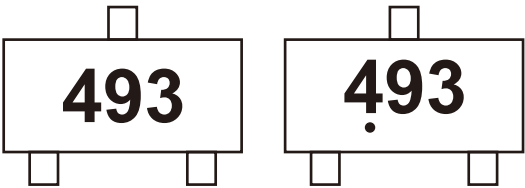

Solid dot = Control code

Suggested P.C.B. PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.80	0.031
B	0.60	0.024
C	1.90	0.075
D	2.02	0.080
E	2.82	0.111

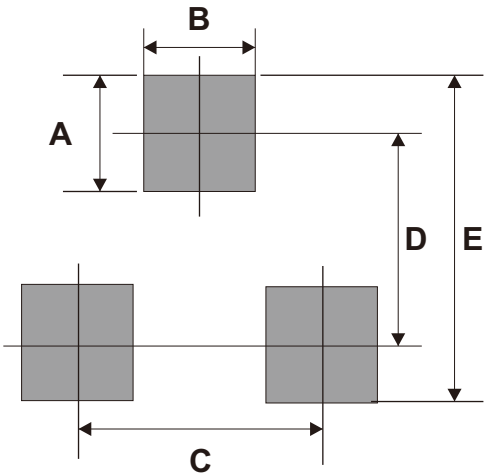

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7