


CPDF Series-HF

RoHS Device

Halogen Free




Features

- Bi-directional ESD protection.
- Surface mount package.
- High component density.

Mechanical data

- Case: 1005/SOD-323F standard package, molded plastic.
- Terminals: Gold plated, solderable per MIL-STD-750, method 2026.
- Mounting position: Any.

Circuit Diagram

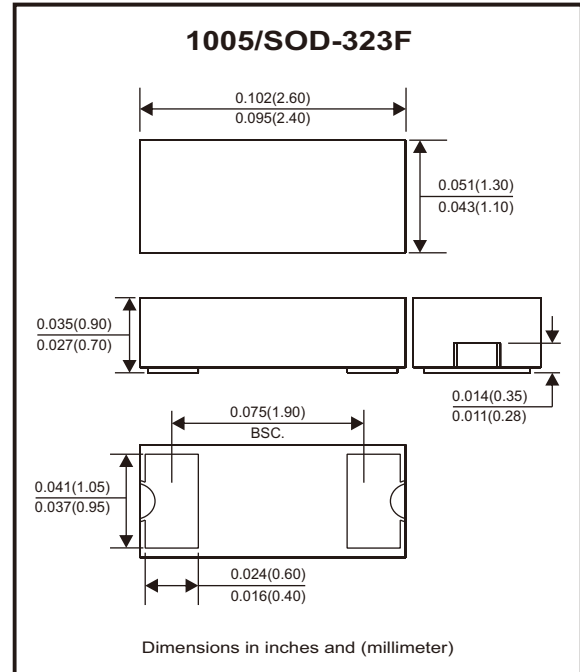

Maximum Rating (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Value	Unit
Peak pulse power	CPDF5V0-HF CPDF12V-HF CPDF24V-HF $T_P = 8/20\mu s$	P_{PP}	75 25 47	W
Peak pulse current	CPDF5V0-HF CPDF12V-HF CPDF24V-HF $T_P = 8/20\mu s$	I_{PP}	5 1 1	A
ESD capability	IEC 61000-4-2(air) IEC 61000-4-2(contact)	ESD	± 16 ± 8	kV
Operating temperature range		T_J	-55 to +125	°C
Storage temperature range		T_{STG}	-55 to +150	°C

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Working peak reverse voltage	CPDF5V0-HF CPDF12V-HF CPDF24V-HF	V_{RWM}			5 12 24	V
Breakdown voltage	CPDF5V0-HF CPDF12V-HF CPDF24V-HF $I_T = 1mA$	V_{BR}	5.1 13 25	7.0 17 28		V
Reverse leakage current	CPDF5V0-HF CPDF12V-HF CPDF24V-HF $V_R = 5V$ $V_R = 12V$ $V_R = 24V$	I_R		0.1	2.0	μA
Clamping voltage	CPDF5V0-HF $I_{PP} = 1A, T_P = 8/20\mu s$ $I_{PP} = 5A, T_P = 8/20\mu s$	V_C			10 15	V
	CPDF12V-HF CPDF24V-HF $I_{PP} = 1A, T_P = 8/20\mu s$	V_C			25 47	
Junction capacitance	CPDF5V0-HF CPDF12V-HF CPDF24V-HF $V_R = 0V, f = 1MHz$	C_J		15 12 10	20 - -	pF

Typical Rating and Characteristic Curves (CPDF Series-HF)

Fig.1 - Peak Pulse Current Wave
Form Acc. IEC 61000-4-5

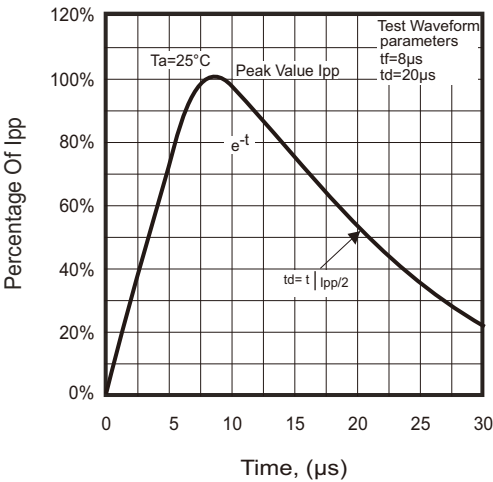


Fig.2-1 - Reverse Characteristics

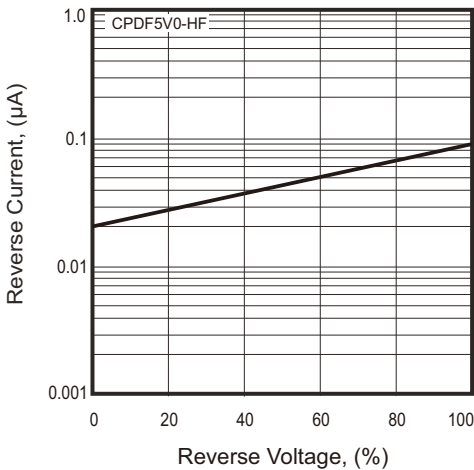


Fig.2-2 - Reverse Characteristics

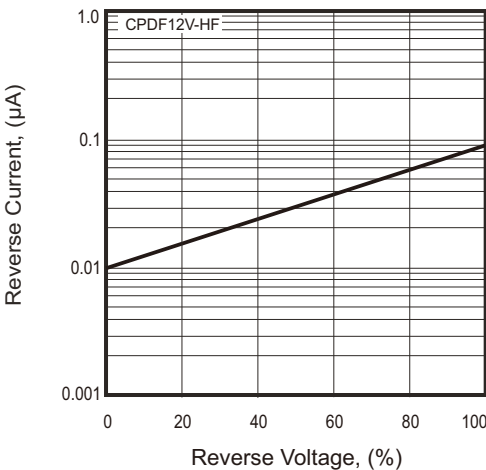


Fig.2-3 - Reverse Characteristics

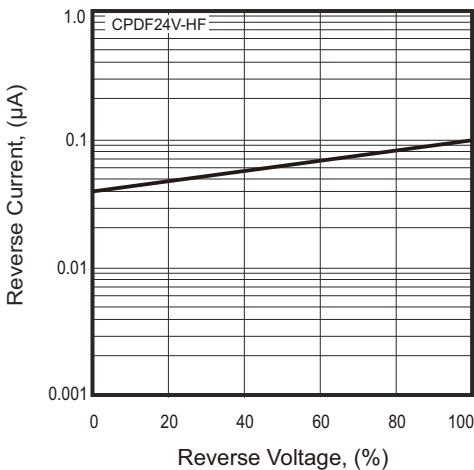


Fig.3 - Capacitance Between
Terminals Characteristics



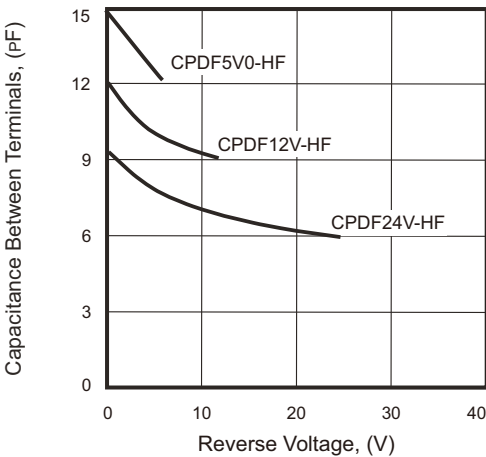


Fig.4 - Power Rating Derating Curve

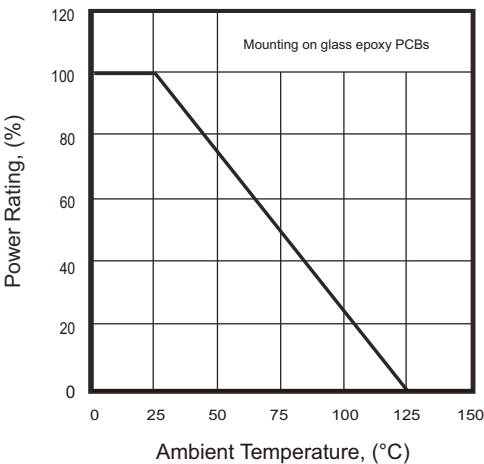

Reel Taping Specification

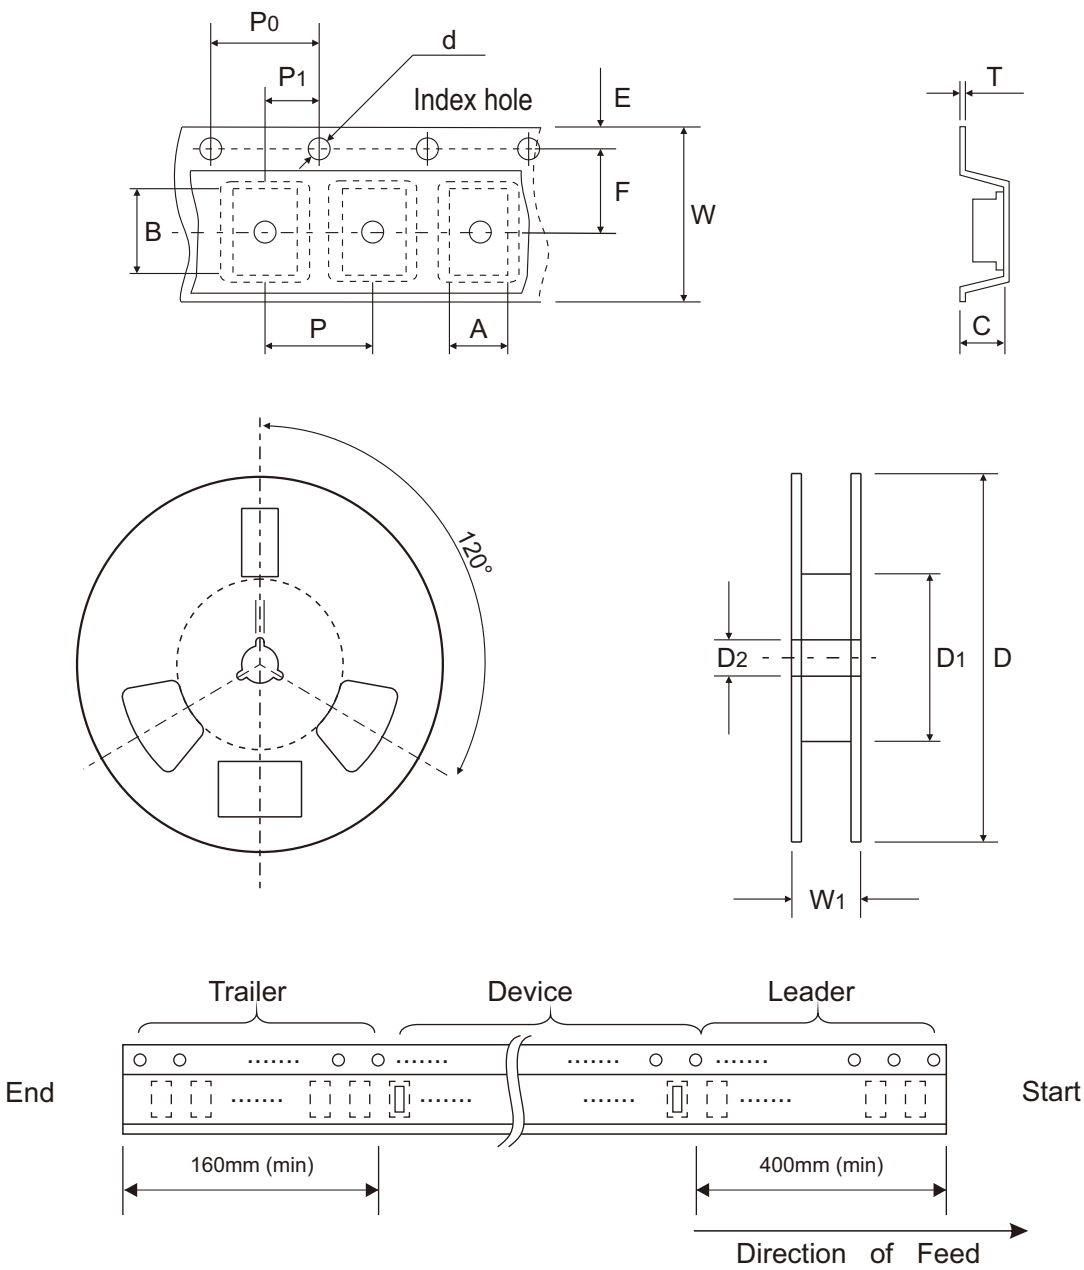

1005 (SOD-323F)	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	1.45 ± 0.05	2.80 ± 0.05	1.00 ± 0.05	1.50 + 0.10 - 0.00	178.00 ± 1.00	60.00 ± 0.50	13.50 ± 0.20
	(inch)	0.057 ± 0.002	0.110 ± 0.002	0.039 ± 0.002	0.059 + 0.004 - 0.000	7.008 ± 0.039	2.362 ± 0.020	0.531 ± 0.008

1005 (SOD-323F)	SYMBOL	E	F	P	P0	P1	T	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	0.23 ± 0.05	8.00 ± 0.10	12.00 + 0.50 - 0.00
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.009 ± 0.002	0.315 ± 0.004	0.472 + 0.020 - 0.000

Marking Code


Part Number	Marking Code
CPDF5V0-HF	E05
CPDF12V-HF	E12
CPDF24V-HF	E24



xxx = Product type marking code

Suggested P.C.B. PAD Layout

SIZE	1005/SOD-323F	
	(mm)	(inch)
A	2.10	0.083
B	1.20	0.047
C	1.20	0.047
D	3.30	0.130
E	0.90	0.035

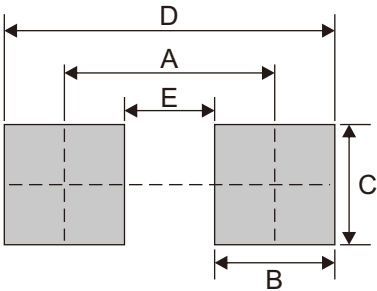

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
1005/ SOD-323F	4,000	7