

## CPDU3V3UP-HF

**RoHS Device**  
**Halogen Free**




### Features

- Working voltage: 3.3V.
- Low leakage current.
- Low operating and clamping voltages.

### Mechanical data

- Case: 0603/SOD-523F standard package, molded plastic.
- Terminals: Gold plated, solderable per MIL-STD-750, method 2026.
- Mounting position: Any.
- Weight: 0.003 grams (approx.).

### Circuit Diagram

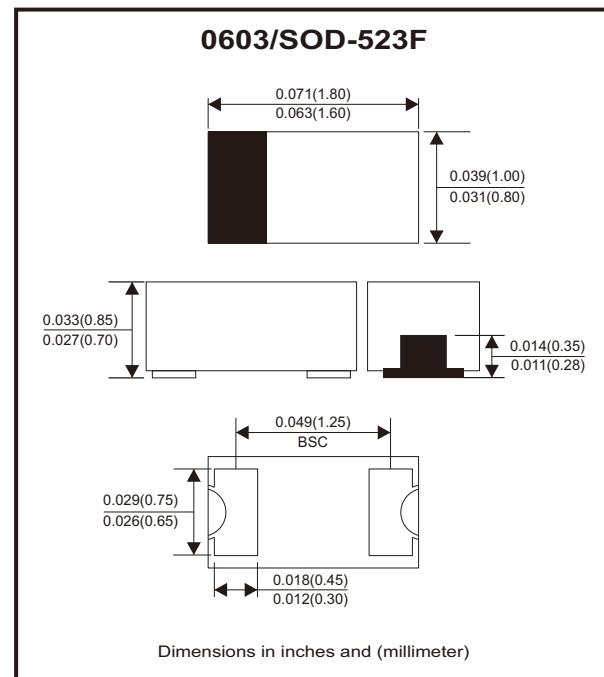

### Maximum Rating

(at  $T_A=25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak pulse power ( tp = 8/20 $\mu\text{s}$ )	PPP	40	W
Peak pulse current ( tp = 8/20 $\mu\text{s}$ )	I <sub>PP</sub>	5	A
ESD per IEC 61000-4-2(Air) ESD per IEC 61000-4-2(Contact)	V <sub>ESD</sub>	$\pm 20$ $\pm 15$	kV
Operating temperature range	T <sub>j</sub>	-55 to +125	°C
Storage temperature range	T <sub>STG</sub>	-55 to +125	°C

### Electrical Characteristics

(at  $T_A=25^\circ\text{C}$  unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Reverse stand-off voltage		V <sub>RWM</sub>			3.3	V
Punch-through voltage	I <sub>PT</sub> = 2 $\mu\text{A}$	V <sub>PT</sub>	3.5			V
Snap-back voltage	I <sub>SB</sub> = 50mA	V <sub>SB</sub>	2.8			V
Reverse leakage current	V <sub>RWM</sub> = 3.3V	I <sub>R</sub>		0.05	0.5	$\mu\text{A}$
Clamping voltage	I <sub>PP</sub> = 1A, tp = 8/20 $\mu\text{s}$	V <sub>C</sub>			5.5	V
	I <sub>PP</sub> = 5A, tp = 8/20 $\mu\text{s}$	V <sub>C</sub>			8.0	V
Reverse clamping voltage	I <sub>PPR</sub> = 1A, tp = 8/20 $\mu\text{s}$	V <sub>CR</sub>			2.4	V
Junction capacitance	V <sub>R</sub> = 0V, f = 1MHz	C <sub>j</sub>	12	16		pF

# SMD ESD Protection Diode

**Comchip**  
SMD Diode Specialist

## Rating and Characteristic Curves (CPDU3V3UP-HF)

Fig.1 - Definitions of Electrical Characteristics

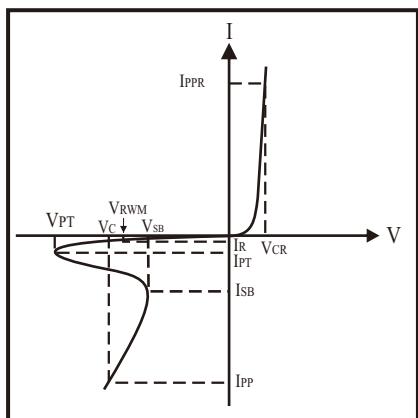


Fig.2 - Non-Repetitive Max. Peak Pulse Power vs. Pulse Time

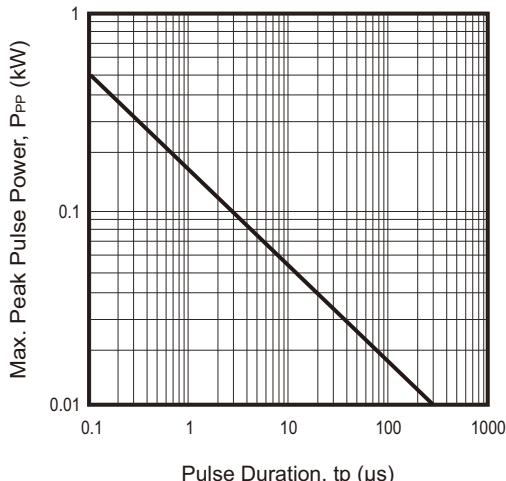


Fig.3 - Power Rating Derating Curve

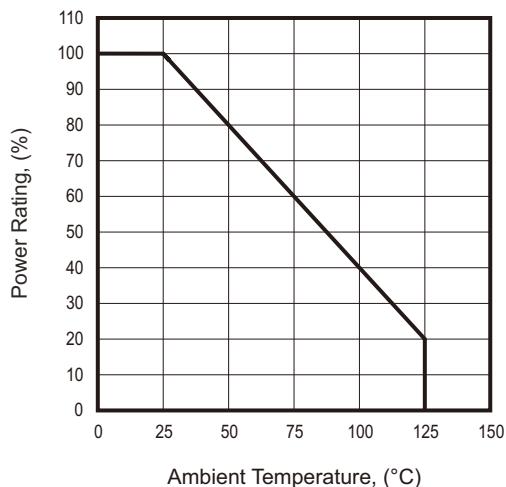


Fig.4 - Clamping Voltage Vs. Peak Pulse Current

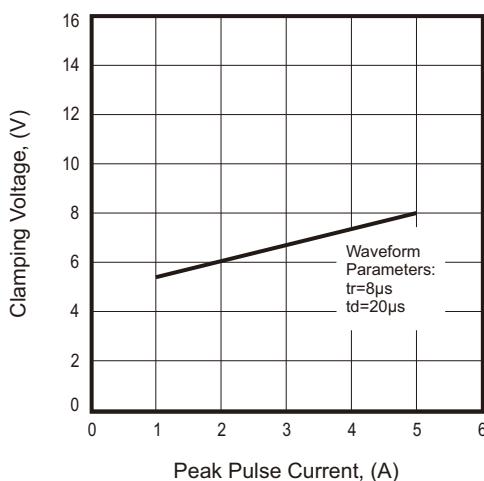


Fig.5 - Forward Voltage Vs. Forward Current



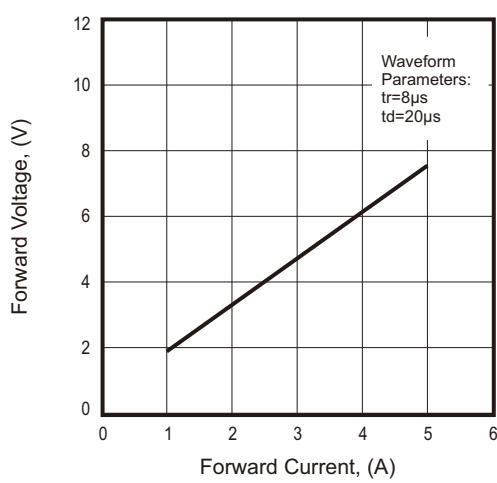


Fig.6 - Junction Capacitance Vs. Reverse Voltage

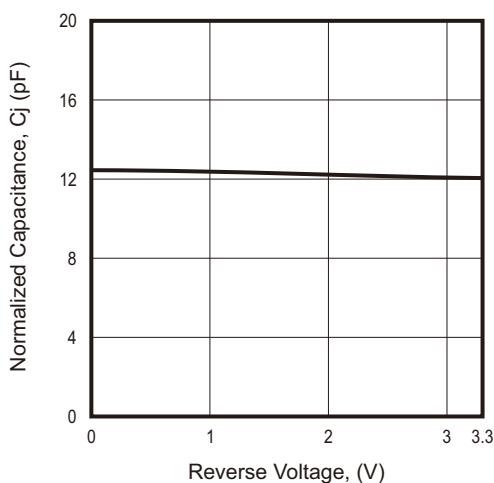

## Reel Taping Specification

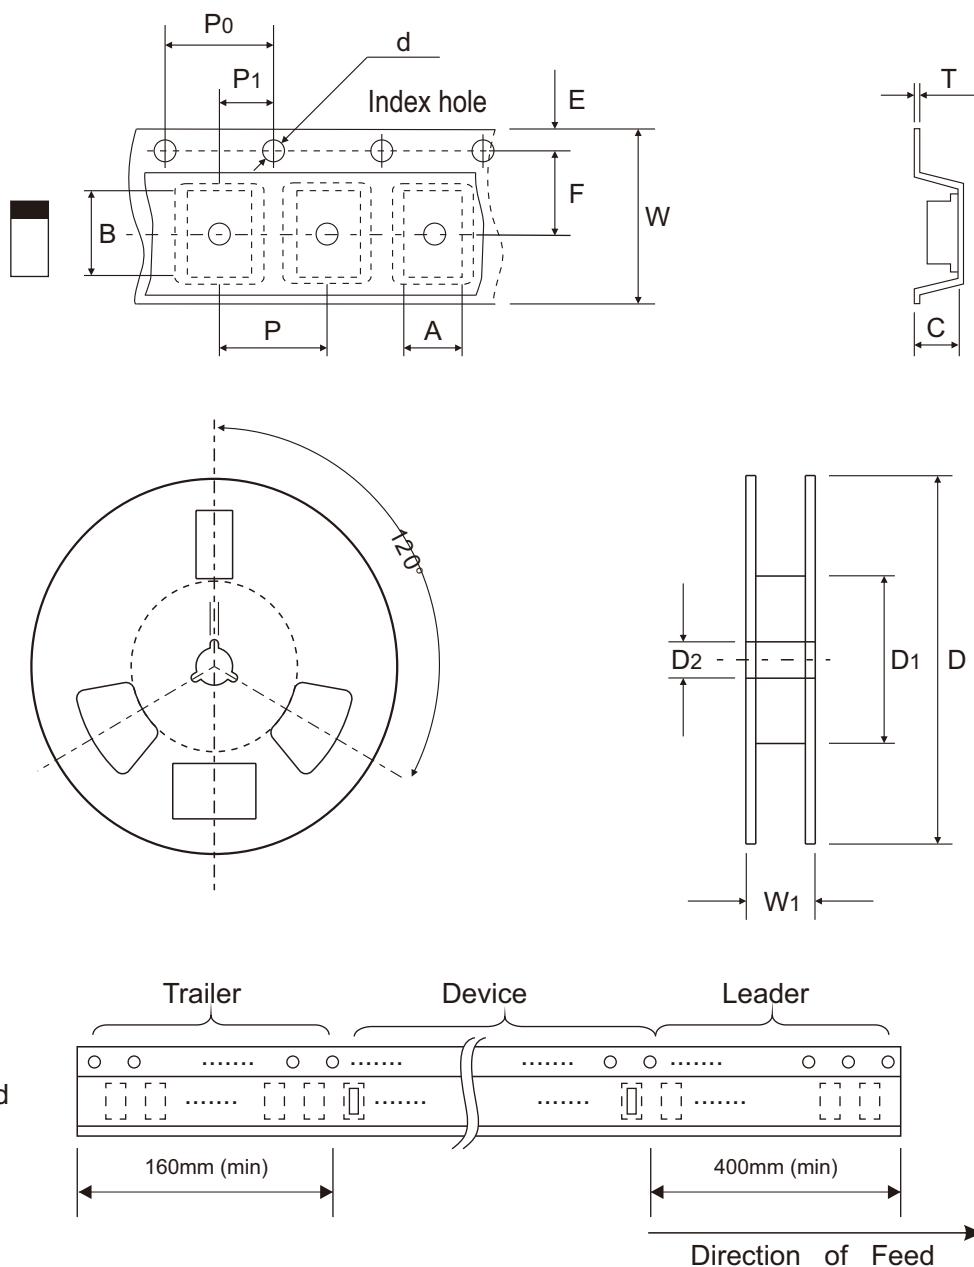

0603 (SOD-523F)	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	$1.16 \pm 0.10$	$1.90 \pm 0.10$	$0.95 \pm 0.10$	$1.50 + 0.10$ $- 0.00$	$178.00 \pm 1.00$	$60.00 \pm 0.50$	$13.50 \pm 0.20$
	(inch)	$0.046 \pm 0.004$	$0.075 \pm 0.004$	$0.037 \pm 0.004$	$0.059 + 0.004$ $- 0.000$	$7.008 \pm 0.039$	$2.362 \pm 0.020$	$0.531 \pm 0.008$

0603 (SOD-523F)	SYMBOL	E	F	P	P0	P1	T	W	W1
	(mm)	$1.75 \pm 0.10$	$3.50 \pm 0.05$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$2.00 \pm 0.05$	$0.22 \pm 0.03$	$8.00 \pm 0.20$	$12.00 + 0.50$ $- 0.00$
	(inch)	$0.069 \pm 0.004$	$0.138 \pm 0.002$	$0.157 \pm 0.004$	$0.157 \pm 0.004$	$0.079 \pm 0.002$	$0.009 \pm 0.001$	$0.315 \pm 0.008$	$0.472 + 0.020$ $- 0.000$


## Marking Code

Part Number	Marking Code
CPDU3V3UP-HF	E3V3



## Suggested P.C.B. PAD Layout

SIZE	0603/SOD-523F	
	(mm)	(inch)
A	1.70	0.067
B	0.60	0.024
C	0.80	0.031
D	2.30	0.091
E	1.10	0.043

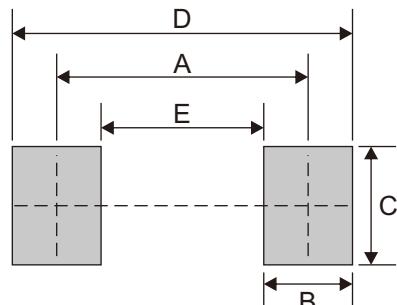

## Standard Packaging

Case Type	REEL PACK	
	REEL ( pcs )	Reel Size (inch)
0603/SOD-523F	4,000	7