

# SMD ESD Protection Diode

**Comchip**  
SMD Diode Specialist

## CPDU5V0HE-HF

RoHS Device  
Halogen Free




### Features

- Bi-directional ESD protection.
- IEC 61000-4-5 (surge) ; IPP=8A.
- IEC 61000-4-2 (ESD) ; ±30KV(contact).
- Low clamping voltage.
- Low leakage current.
- High surge current.

### Mechanical data

- Case: 0603/SOD-523F Standard package, molded plastic.
- Terminals: Gold plated, solderable per MIL-STD-750, method 2026.
- Mounting position: Any.
- Weight: 0.003 grams(approx.).

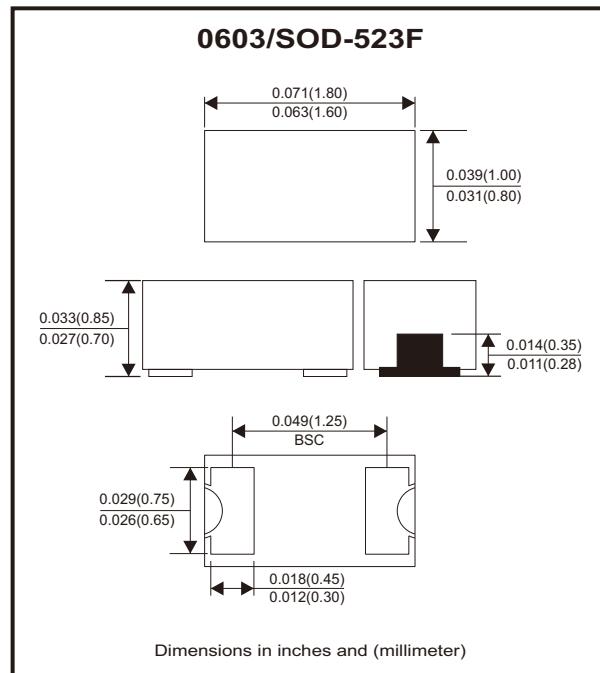

### Circuit Diagram



### Maximum Rating (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Value		Unit
Peak pulse power	TP = 8/20μs	P <sub>PP</sub>	128		W
Peak pulse current	TP = 8/20μs	I <sub>PP</sub>	8		A
ESD capability	IEC 61000-4-2(air) IEC 61000-4-2(contact)	ESD	±30		kV
Operating temperature range		T <sub>j</sub>	-40~+125		°C
Storage temperature range		T <sub>STG</sub>	-55~+150		°C

### Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Working peak reverse voltage		V <sub>RWM</sub>			5	V
Breakdown voltage	I <sub>T</sub> = 1mA	V <sub>BR</sub>	5.5	7.0		V
Reverse leakage current	V <sub>RWM</sub> = 5V	I <sub>R</sub>		0.1	1.0	μA
Clamping voltage	I <sub>PP</sub> = 1A, TP = 8/20μs I <sub>PP</sub> = 8A, TP = 8/20μs	V <sub>c</sub>			11 16	V
Junction capacitance	V <sub>R</sub> = 0V, f = 1MHz	C <sub>J</sub>		15	20	pF

Company reserves the right to improve product design , functions and reliability without notice.

REV:B

## Rating and Characteristic Curves (CPDU5V0HE-HF)

Fig.1 - 8/20 $\mu$ s Peak Pulse Current WaveForm Acc. IEC61000-4-5

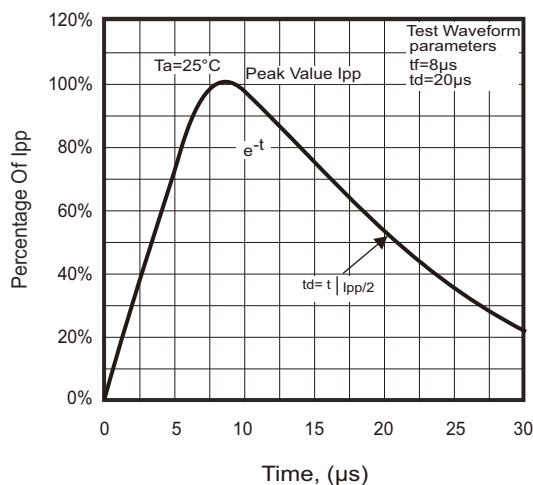


Fig.2 - Typical Capacitance Between Terminals Characteristics

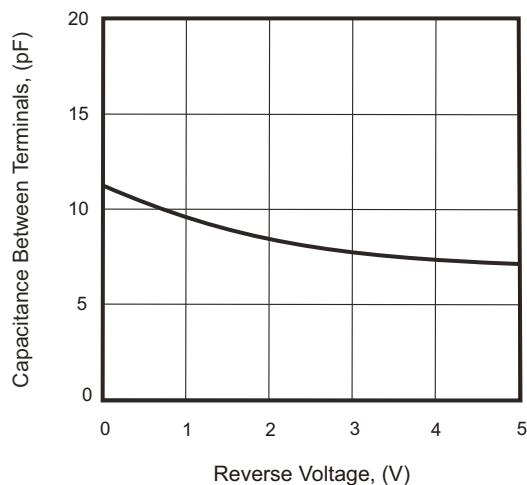


Fig.3 - Clamping Voltage Vs. Peak Pulse Current





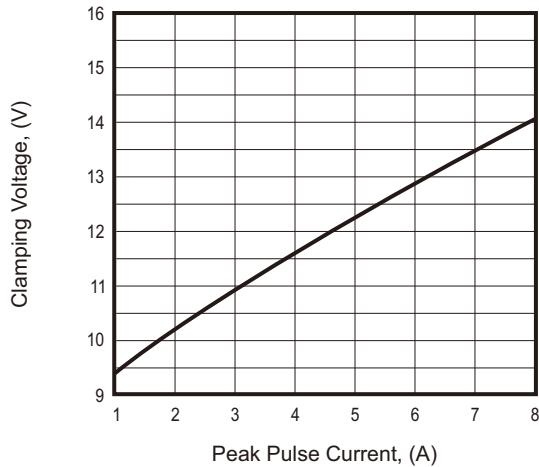


Fig.4 - Power Rating Derating Curve

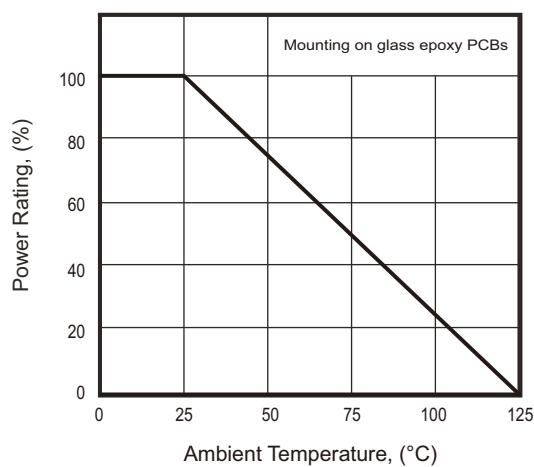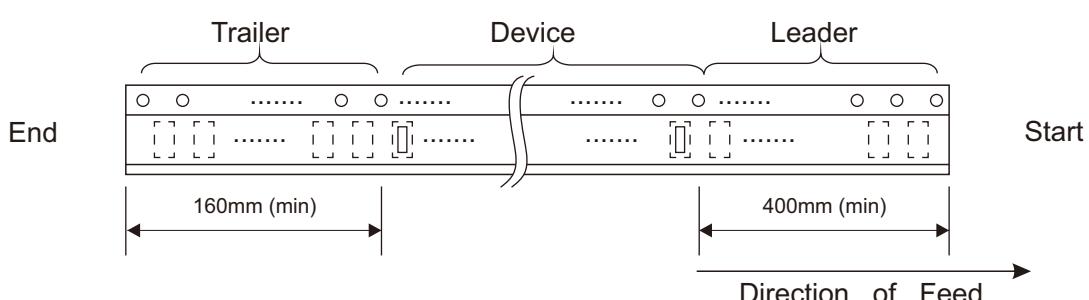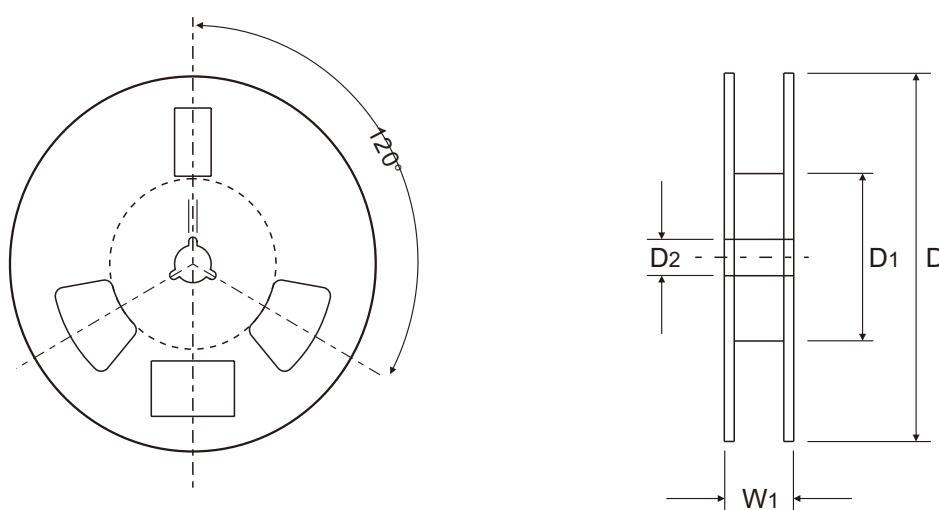

## Reel Taping Specification

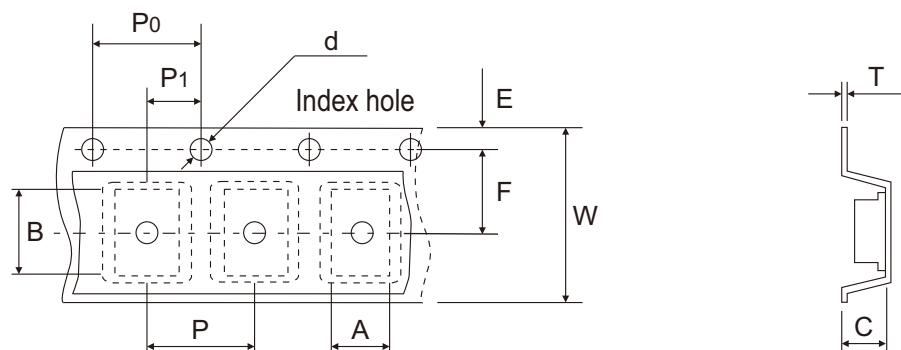

0603 (SOD-523F)	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	$1.16 \pm 0.10$	$1.90 \pm 0.10$	$0.95 \pm 0.10$	$1.50 + 0.10$ $- 0.00$	$178.00 \pm 1.00$	$60.00 \pm 0.50$	$13.50 \pm 0.20$
	(inch)	$0.046 \pm 0.004$	$0.075 \pm 0.004$	$0.037 \pm 0.004$	$0.059 + 0.004$ $- 0.000$	$7.008 \pm 0.039$	$2.362 \pm 0.020$	$0.531 \pm 0.008$

0603 (SOD-523F)	SYMBOL	E	F	P	$P_0$	$P_1$	T	W	W1
	(mm)	$1.75 \pm 0.10$	$3.50 \pm 0.05$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$2.00 \pm 0.05$	$0.22 \pm 0.03$	$8.00 \pm 0.20$	$12.00 + 0.50$ $- 0.00$
	(inch)	$0.069 \pm 0.004$	$0.138 \pm 0.002$	$0.157 \pm 0.004$	$0.157 \pm 0.004$	$0.079 \pm 0.002$	$0.009 \pm 0.001$	$0.315 \pm 0.008$	$0.472 + 0.020$ $- 0.000$

Company reserves the right to improve product design , functions and reliability without notice.

REV:B


## Marking Code

Part Number	Marking Code
CPDU5V0HE-HF	E05

**E05**

## Suggested P.C.B. PAD Layout

SIZE	0603/SOD-523F	
	(mm)	(inch)
A	1.70	0.067
B	0.60	0.024
C	0.80	0.031
D	2.30	0.091
E	1.10	0.043

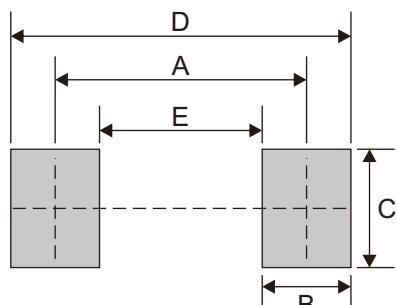

## Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
0603/ SOD-523F	4,000	7