


## CPDWL5V0-HF

### Ultra small SMD package

### RoHS Device

### Halogen Free




Case 01005

## Features

- Bi-directional ESD protection.
- High ESD protection level.
- Surface mount package.
- High component density.
- Low clamping voltage.
- Low leakage.
- Working voltage: 5V.

Outline



Circuit Diagram



## Mechanical data

- Case: 01005 package, molded plastic.
- Mounting position: Any.

Part number	Package	Reel	Reel size	Marking code
CPDWL5V0-HF	01005	10,000	7 inch	B

## Maximum Rating

(at  $T_A=25^\circ\text{C}$  unless otherwise noted)

Parameter	Conditions	Symbol	Value	Unit
Peak pulse power	$T_P = 8/20\mu\text{s}$	$P_{PP}$	60	W
Peak pulse current	$T_P = 8/20\mu\text{s}$	$I_{PP}$	5	A
ESD capability	IEC 61000-4-2(air) ICE 61000-4-2(contact)	ESD	$\pm 18$	kV
Operating temperature range		$T_j$	-40 ~ +125	$^\circ\text{C}$
Storage temperature range		$T_{STG}$	-55 ~ +150	$^\circ\text{C}$

## Electrical Characteristics

(at  $T_A=25^\circ\text{C}$  unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Working peak reverse voltage		$V_{RWM}$			5	V
Breakdown voltage	$I_R = 1\text{mA}$	$V_{BR}$	6			V
Reverse leakage current	$V_R = 5\text{V}$	$I_R$			0.1	$\mu\text{A}$
Clamping voltage	$I_{PP} = 1\text{A}, T_P = 8/20\mu\text{s}$	$V_C$		8.5	10	V
	$I_{PP} = 5\text{A}, T_P = 8/20\mu\text{s}$			10.5	12	
Junction capacitance	$V_R = 0\text{V}, f = 1\text{MHz}$	$C_J$			30	pF

## Typical Rating and Characteristic Curves (CPDWL5V0-HF)

Fig.1 - 8/20 $\mu$ s Peak Pulse Current  
Waveform Acc. IEC 61000-4-5

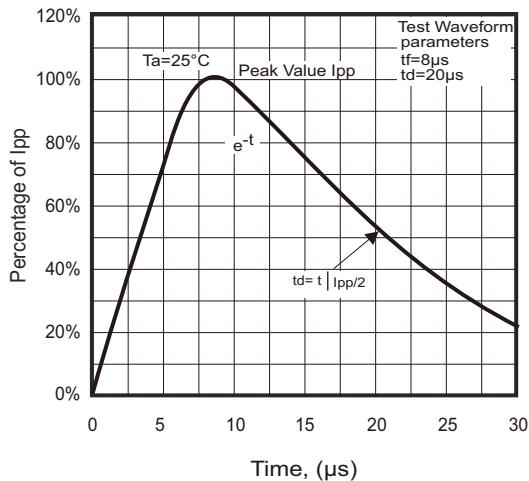


Fig.2 - Power Rating Derating Curve

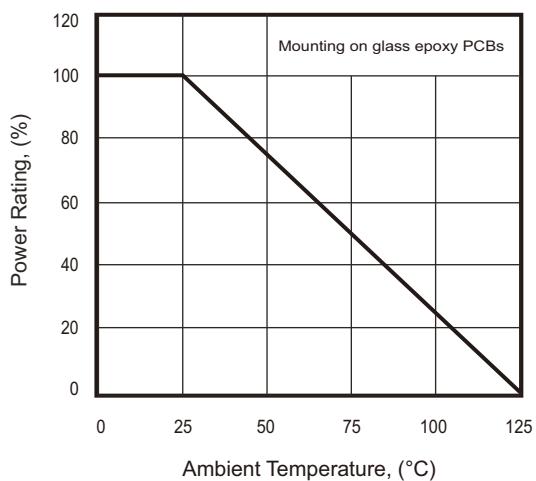


Fig.3 - Typical Capacitance Between Terminals Characteristics



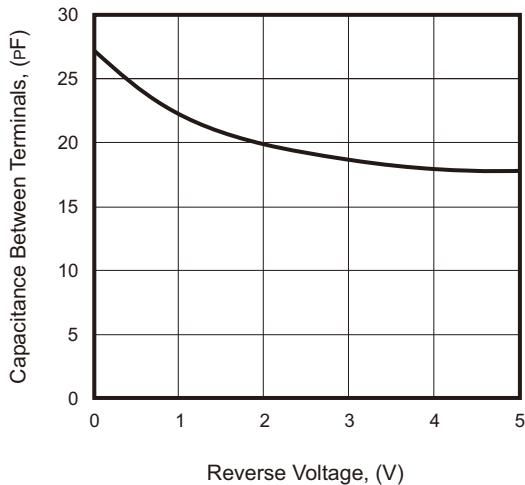


Fig.4 - Typical Clamping Voltage Vs. Peak Pulse Current

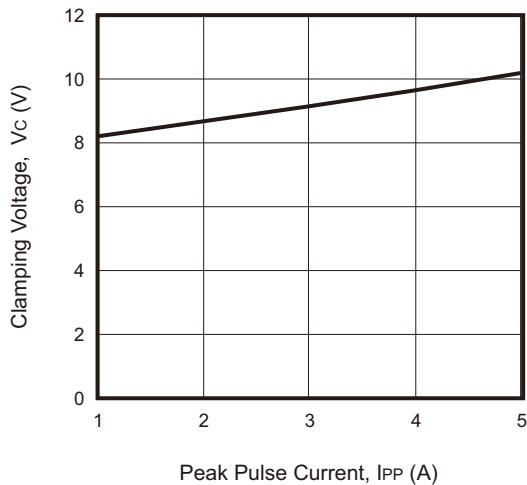

## Taping Specification

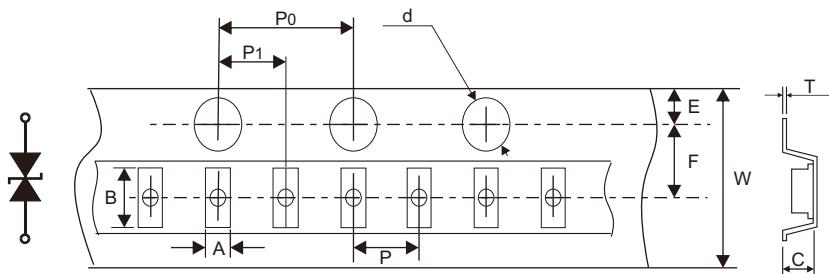




SIZE	01005	
	(mm)	
A	0.27±0.02	
B	0.49±0.02	
C	0.215±0.02	
P	2.00±0.05	
P0	4.00±0.10	
P1	2.00±0.05	
d	1.50±0.10	
E	1.75±0.10	
F	3.50±0.05	
W	8.00+0.30/-0.10	
T	0.20±0.05	

## Package Dimensions


WL, 0.42x0.22, 0.26P

Case 01005

Symbol	Millimeters		
	Min	Nom	Max
A	0.15	0.17	0.20
A1	-	-	0.01
b	0.13	0.16	0.17
D	0.40	0.42	0.44
E	0.20	0.22	0.24
e	-	0.26	-
L	0.07	0.10	0.11

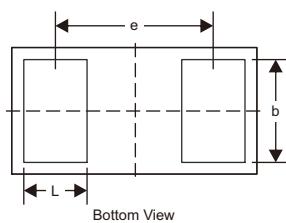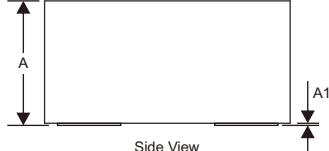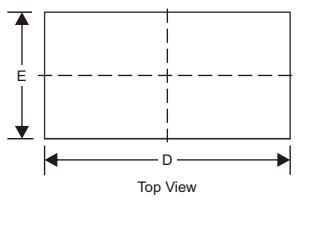

## Suggested P.C.B. PAD Layout

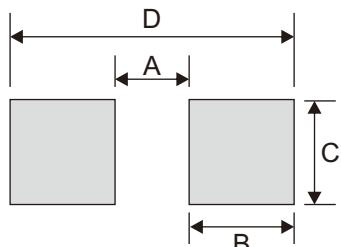

Size	01005	
	(mm)	(inch)
A	0.12	0.005
B	0.17	0.007
C	0.17	0.007
D	0.46	0.018