


BAS16WS-HF

RoHS Device

Halogen Free




Features

- Fast switching device ($T_{rr} < 6.0\text{nS}$).
- Power dissipation of 250mW.
- High stability and high reliability.
- Low reverse leakage.

Mechanical data

- Case: SOD-323, molded plastic.
- Polarity: Color band denotes cathode end.
- Mounting position: Any.

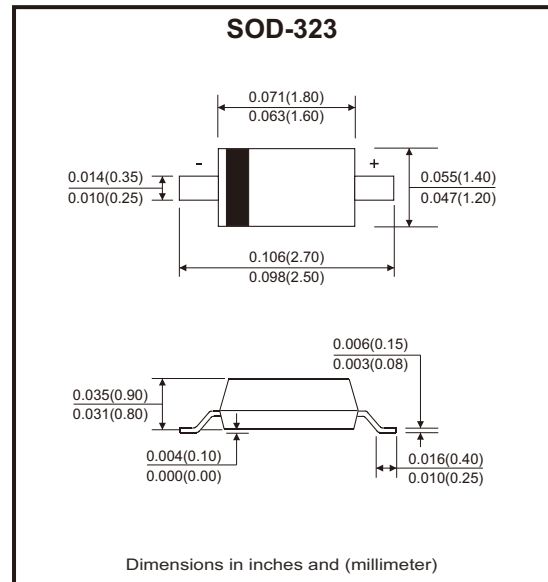

Circuit Diagram



Maximum Rating (at $T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Reverse voltage	V_R	75	V
Peak repetitive reverse voltage	V_{RRM}	85	V
Power dissipation	P_D	250	mW
Average rectified current	I_o	250	mA
Non-repetitive peak forward surge current @ $t=8.3\text{ms}$	I_{FSM}	2	A
Thermal resistance from junction to ambient	$R_{\theta JA}$	500	$^\circ\text{C/W}$
Operating junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +150	$^\circ\text{C}$

Note: Valid provided that electrodes are kept at ambient temperature.

Electrical Characteristics (at Ta=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Reverse voltage	$I_R = 10\mu A$	$V_{(BR)}$	75			V
Reverse leakage current	$V_R = 25V$	I_R			30	nA
	$V_R = 75V$				1	μA
Forward voltage	$I_F = 1mA$	V_F			0.715	V
	$I_F = 10mA$				0.855	
	$I_F = 50mA$				1.00	
	$I_F = 150mA$				1.25	
Reverse recovery time	$I_F = I_R = 10mA$, $R_L = 100\Omega$, $I_{RR} = 0.1 \times I_R$	T_{RR}			6	nS
Capacitance	$V_R = 0V$, $f = 1MHz$	C_T			2	pF

Typical Rating and Characteristic Curves (BAS16WS-HF)

Fig.1 - Forward Characteristics

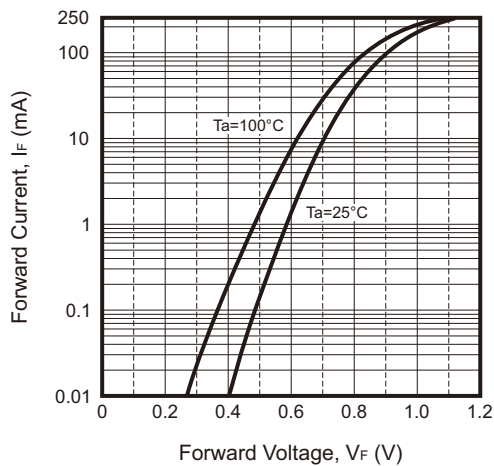


Fig.2 - Reverse Characteristics

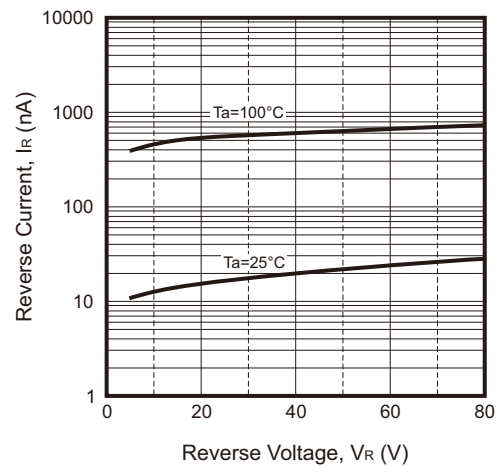


Fig.3 - Capacitance Characteristics



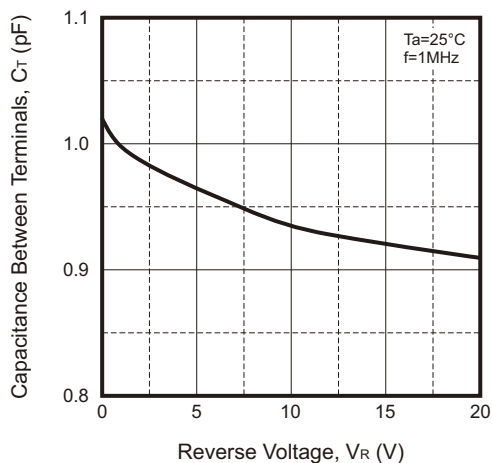


Fig.4 - Power Derating Curve

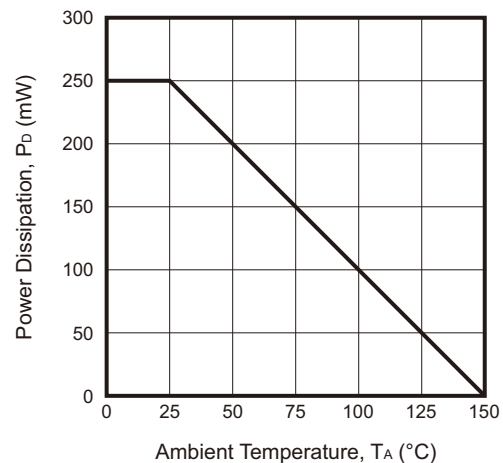

Reel Taping Specification

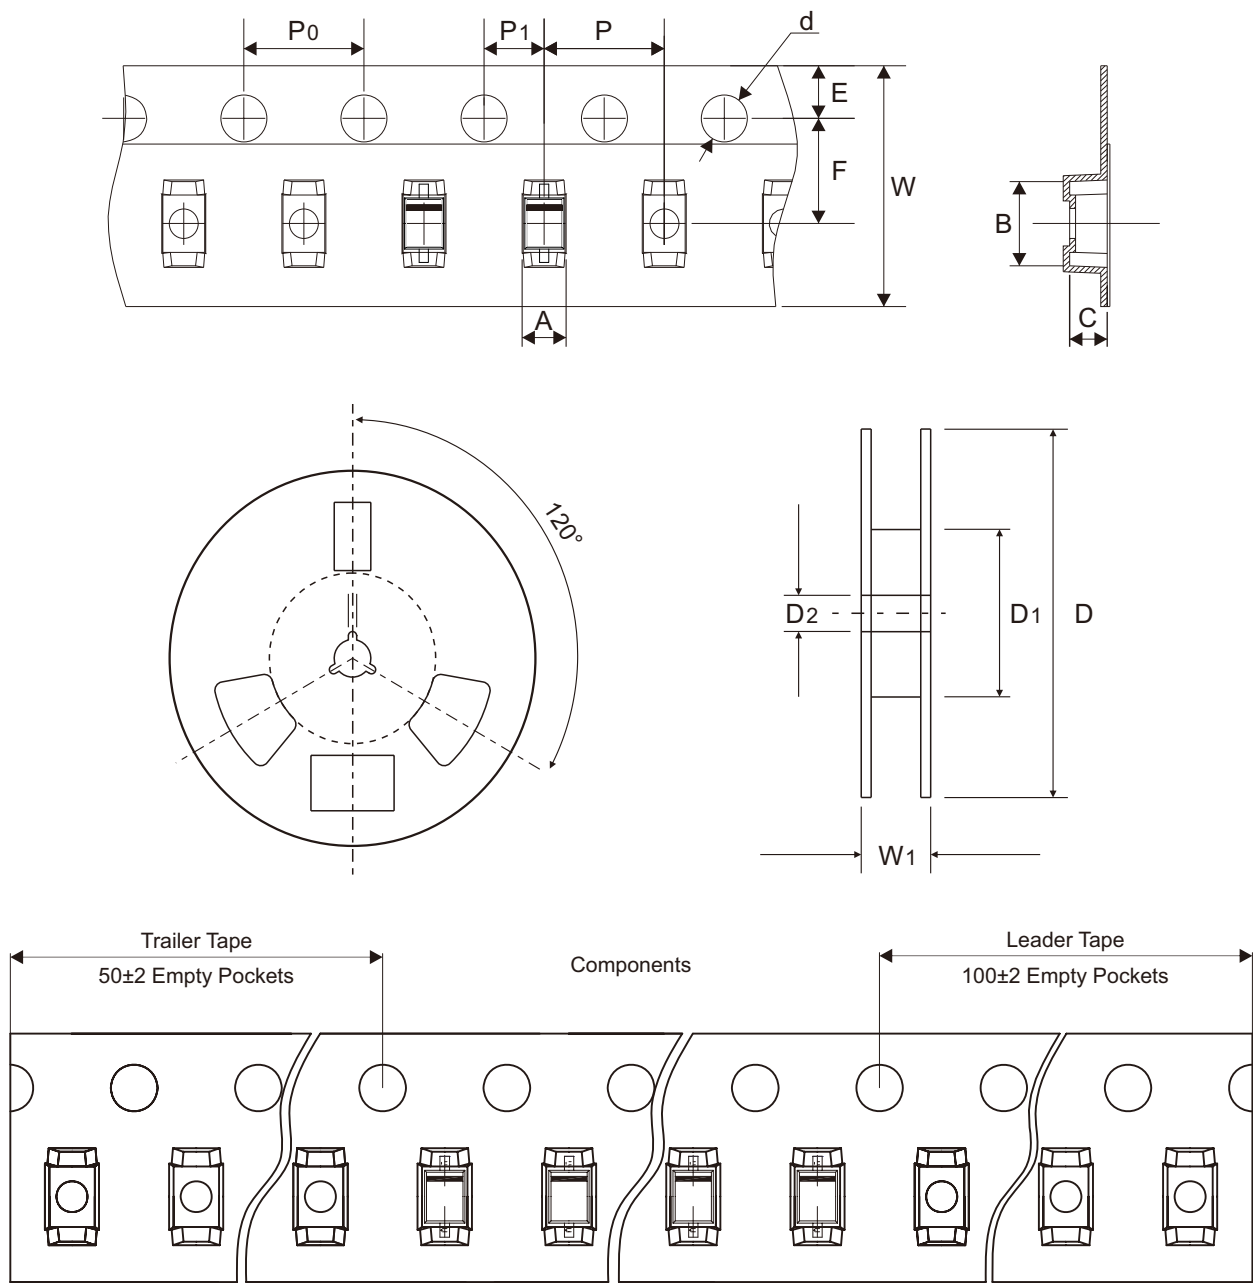


SOD-323	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	1.46 ± 0.05	2.90 ± 0.05	1.25 ± 0.05	1.50 ± 0.10	178.00 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.057 ± 0.002	0.114 ± 0.002	0.049 ± 0.002	0.059 ± 0.004	7.008 ± 0.079	2.142 ± 0.039	0.512 ± 0.039

SOD-323	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	$8.00 + 0.30 - 0.10$	12.30 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	$0.315 + 0.012 - 0.004$	0.484 ± 0.039


Marking Code

Part Number	Marking Code
BAS16WS-HF	T4

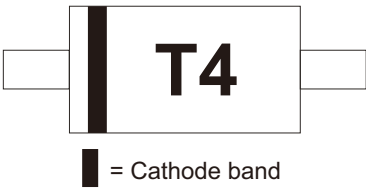

Suggested P.C.B. PAD Layout

SIZE	SOD-323	
	(mm)	(inch)
A	0.80	0.031
B	0.80	0.031
C	3.00	0.118

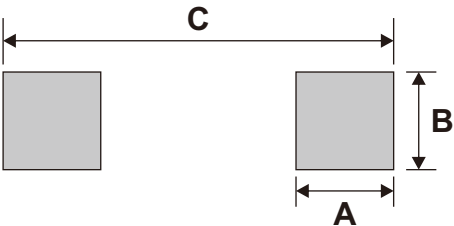

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOD-323	3,000	7