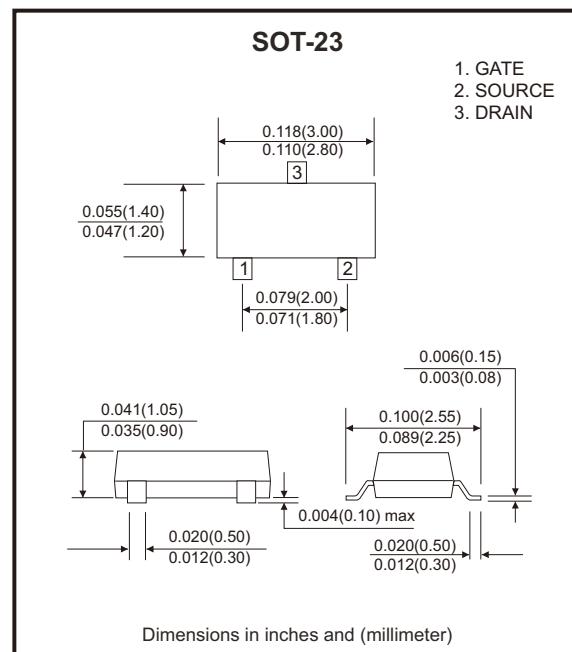
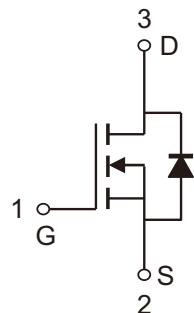


CJ3404-HF

N-Channel
RoHS Device
Halogen Free

**Mechanical Data**

- Case: SOT-23, molded plastic.
- Mounting position: Any.

Circuit Diagram

V _{(BR)DSS}	R _{D(on)MAX}	I _D
30V	30mΩ @ 10V	5.8A
	42mΩ @ 4.5V	

Maximum Ratings and Electrical Characteristics

(at Ta=25 °C unless otherwise noted)

Parameter	Symbol	Value	Units
Drain-source voltage	V _{DS}	30	V
Gate-source voltage	V _{GS}	±20	V
Continuous drain current	I _D	5.8	A
Pulsed drain current (Note 1)	I _{DM}	30	A
Power dissipation	P _D	350	mW
Thermal resistance from junction to ambient (t<5s)	R _{θJA}	357	°C/W
Junction temperature	T _J	150	°C
Storage temperature	T _{STG}	-55 to +150	°C

Notes: 1. Repetitive rating: Pulse width limited by maximum junction temperature.

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameters						
Drain-source breakdown voltage	V _(BR) DSS	V _{GS} =0V , I _D =250μA	30			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =30V , V _{GS} =0V			1	μA
Gate-body leakage current	I _{GSS}	V _{DS} =0V , V _{GS} =±20V			±100	nA
Gate threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	1	1.4	3	V
Drain-source on-resistance (Note 1)	R _{DS(on)}	V _{GS} =10V , I _D =5.8A		23	30	mΩ
		V _{GS} =4.5V , I _D =4.8A		31	42	
Forward transconductance (Note 1)	g _{FS}	V _{DS} =5V , I _D =5.8A	5			S
Diode forward voltage	V _{SD}	I _S = 1A			1	V
Dynamic Parameters (Note 2)						
Input capacitance	C _{iss}	V _{DS} =15V , V _{GS} =0V, f=1MHz			820	pF
Output capacitance	C _{oss}			118		
Reverse transfer capacitance	C _{rss}			85		
Gate resistance	G _g	V _{DS} =0V , V _{GS} =0V , f=1MHz			1.5	
Switching Parameters (Note 2)						
Turn-on delay time	t _{d(on)}	V _{GS} =10V , V _{DS} =15V R _L =2.6Ω , R _{GEN} =3Ω			6.5	nS
Rise time	t _r			3.1		
Turn-off delay time	t _{d(off)}			15.1		
Fall time	t _f			2.7		

Notes:

1. Pulse test: Pulse width≤300μs, Duty cycle≤0.5%.

2. These parameters have no way to verify.

Rating and Characteristic Curves (CJ3404-HF)

Fig.1 - Output Characteristics

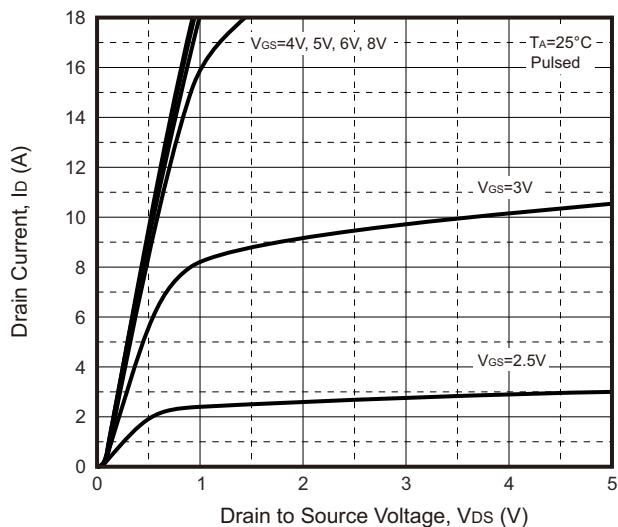


Fig.2 - Transfer Characteristics

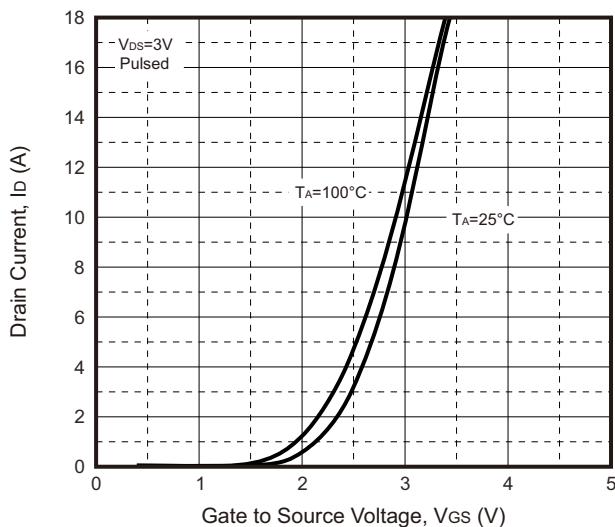


Fig.3 - $R_{DS(ON)}$ — I_D

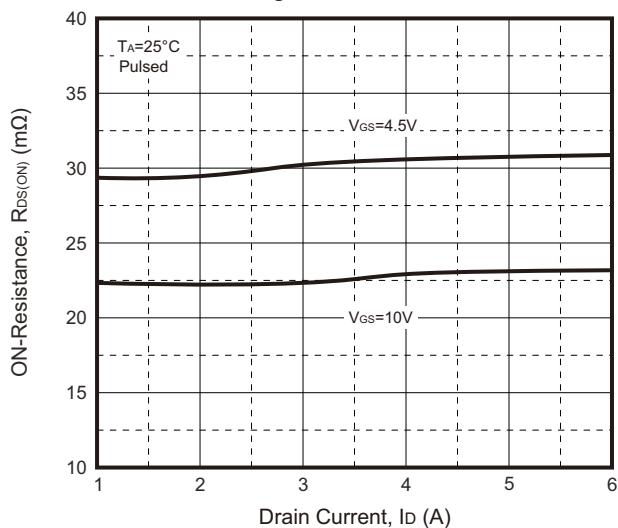


Fig.4 - $R_{DS(ON)}$ — V_{GS}

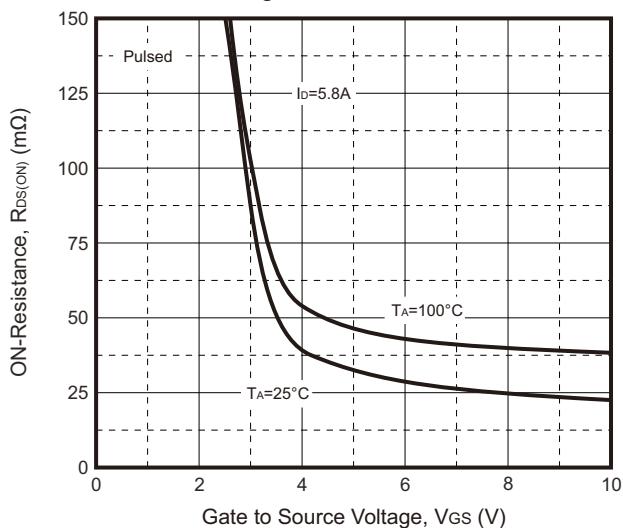


Fig.5 - I_S — V_{SD}



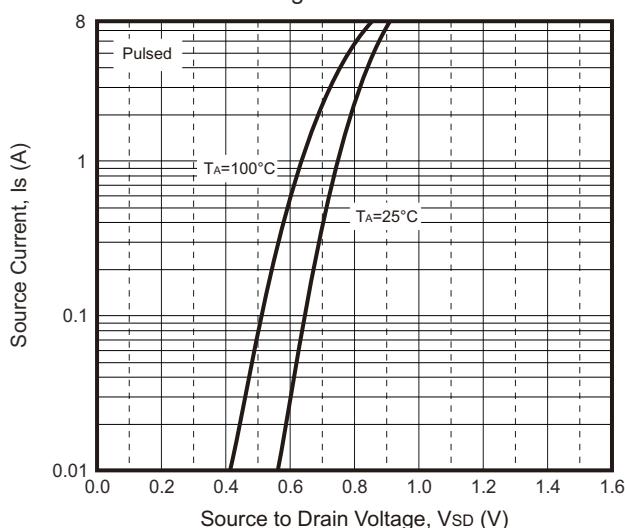


Fig.6 - Threshold Voltage

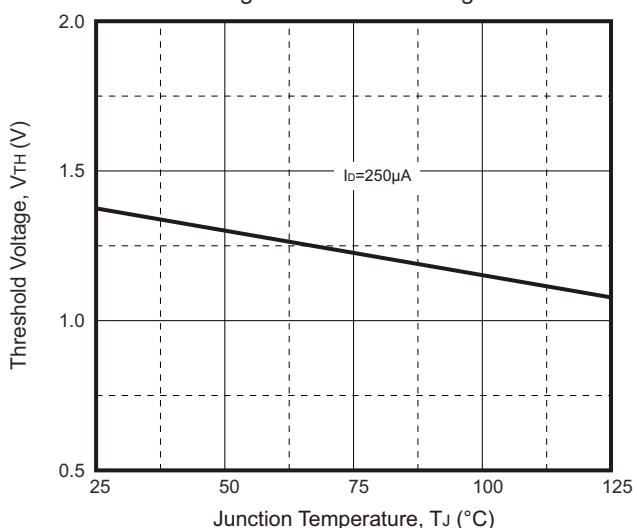

Reel Taping Specification

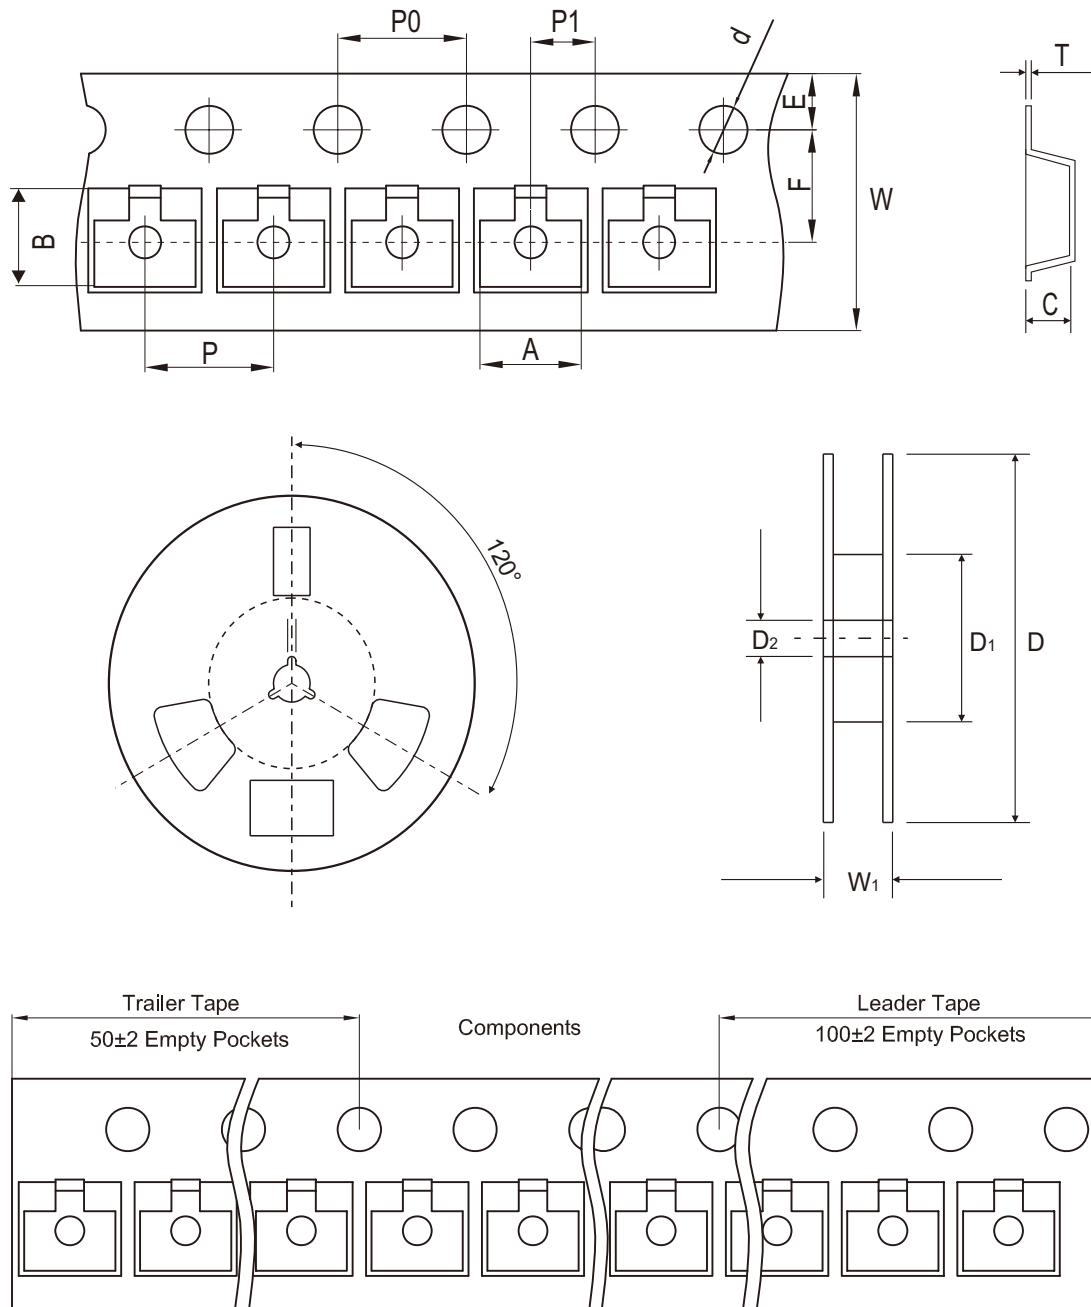


SOT-23	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.15 ± 0.10	2.77 ± 0.10	1.22 ± 0.10	1.50 ± 0.10	178.00 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.124 ± 0.004	0.109 ± 0.004	0.048 ± 0.004	0.059 ± 0.004	7.087 ± 0.079	2.142 ± 0.039	0.512 ± 0.039

SOT-23	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	$8.00 + 0.30 / - 0.10$	12.30 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	$0.315 + 0.012 / - 0.004$	0.484 ± 0.039

Marking Code


Part Number	Marking Code
CJ3404-HF	R4



Solid dot = Control code

Suggested P.C.B. PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.80	0.031
B	0.60	0.024
C	1.90	0.075
D	2.02	0.080

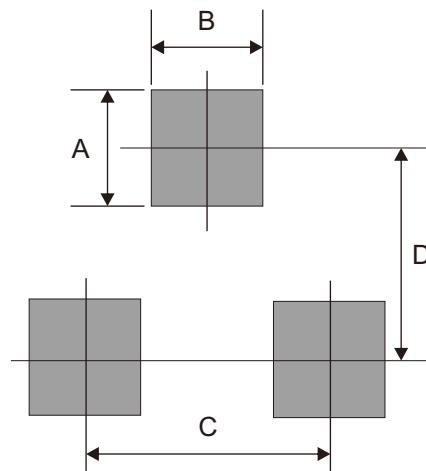

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7