


2SC5658-HF Series (NPN)

RoHS Device
Halogen Free



Features



- Low Cob.

Mechanical data

- Case: SOT-723, molded plastic.
- Terminals: Solderable per MIL-STD-750, method 2026.

Circuit Diagram

- 1.BASE
- 2.EMITTER
- 3.COLLECTOR

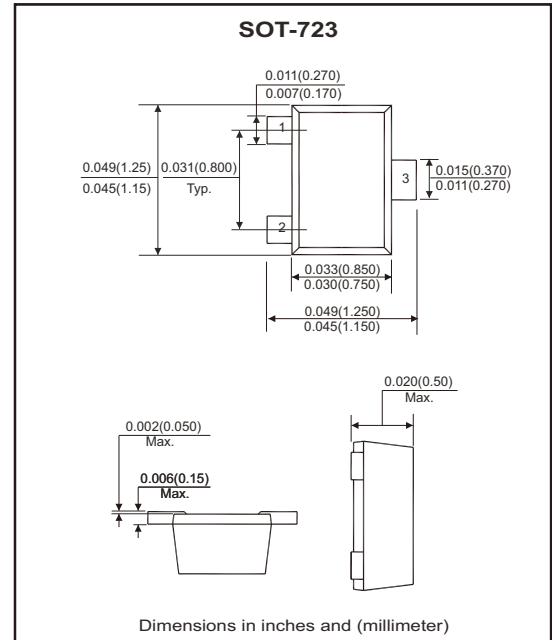

Maximum Ratings (at T_A=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base voltage	V _{CB0}	60	V
Collector-Emitter voltage	V _{CE0}	50	V
Emitter-Base voltage	V _{EB0}	7	V
Collector current- continuous	I _C	150	mA
Collector dissipation	P _C	100	mW
Junction temperature	T _J	150	°C
Storage temperature	T _{STG}	-55 ~ +150	°C

Electrical Characteristics (at T_A=25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V _{(BR)CBO}	I _C = 50μA, I _E = 0	60			V
Collector-emitter breakdown voltage	V _{(BR)CEO}	I _C = 1mA, I _B = 0	50			V
Emitter-base breakdown voltage	V _{(BR)EBO}	I _E = 50μA, I _C = 0	7			V
Collector cut-off current	I _{CBO}	V _{CB} = 60V, I _E = 0			0.1	μA
Emitter cut-off current	I _{EBO}	V _{EB} = 7V, I _C = 0			0.1	μA
DC current transfer ratio	h _{FE}	V _{CE} = 6V, I _C = 1mA	120		560	
Collector-emitter saturation voltage	V _{CE(sat)}	I _C = 50mA, I _B = 5mA			0.4	V
Transition frequency	f _T	V _{CE} = 12V, I _C = 2mA f = 100MHz		180		MHz
Output capacitance	C _{ob}	V _{CB} = 12V, I _E = 0 f = 1MHz			3.5	pF

Rank	2SC5658Q-HF	2SC5658R-HF	2SC5658S-HF
Range	120~270	180~390	270~560

Rating and Characteristic Curves (2SC5658-HF)

Fig.1 - Static Characteristic

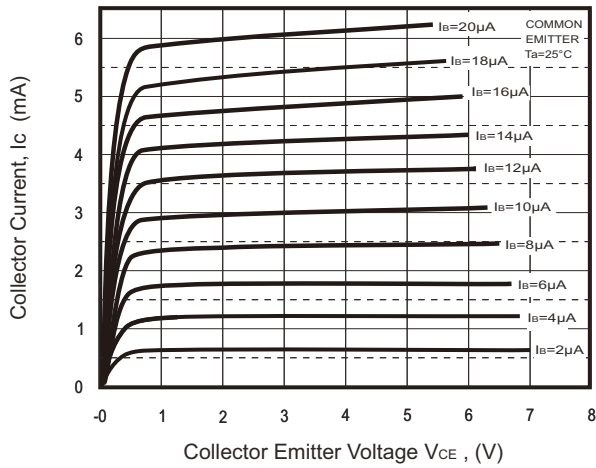


Fig.2 - $h_{FE} - I_C$

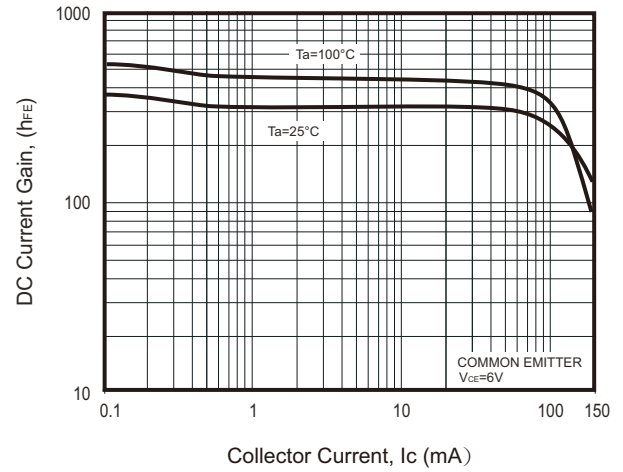


Fig.3 - $V_{BEsat} - I_C$

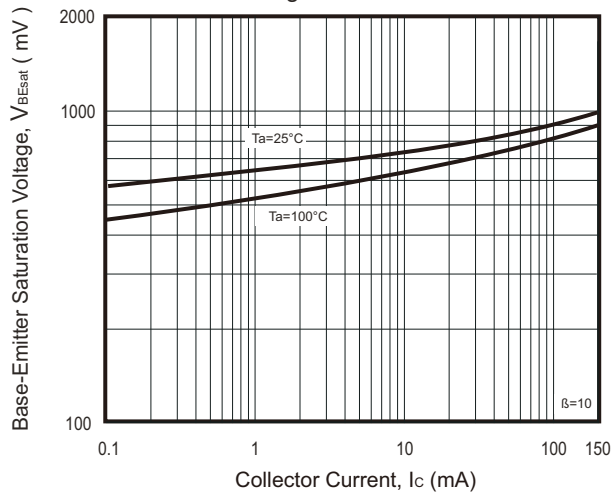


Fig.4 - $V_{CEsat} - I_C$

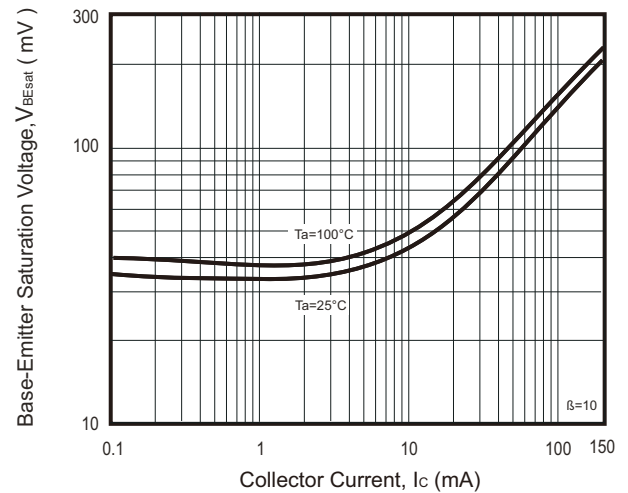


Fig.5 - $I_C - V_{BE}$


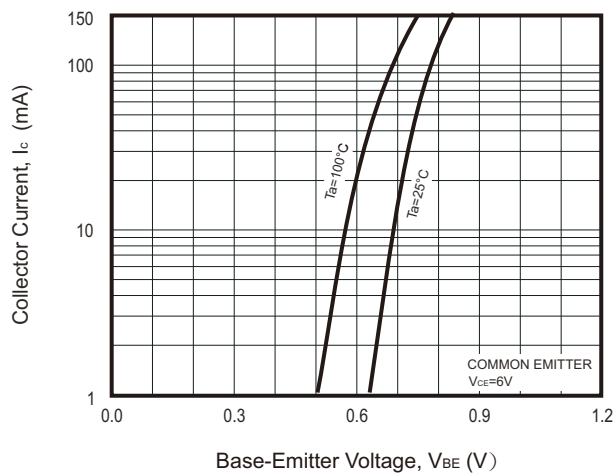


Fig.5 - $f_T - I_C$

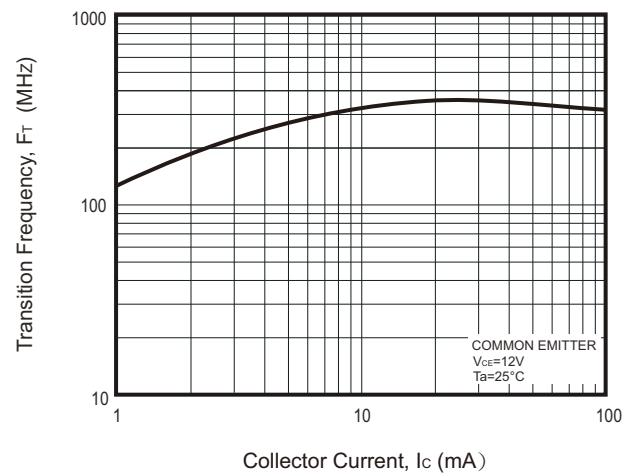

Rating and Characteristic Curves (2SC5658-HF)

Fig.7 - C_{ob}/C_{ib} — V_{CB}/V_{EB}



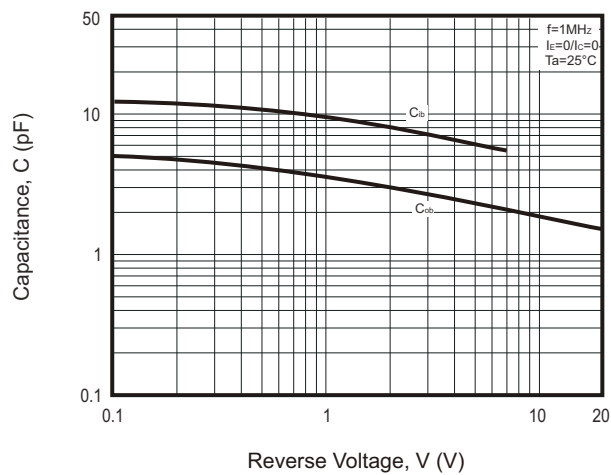


Fig.8 - P_C — T_a

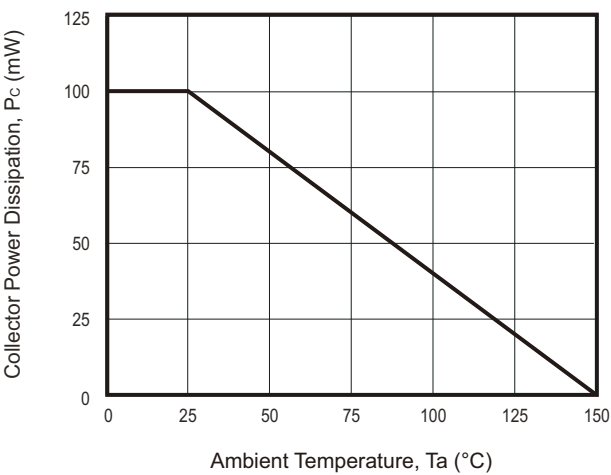

Reel Taping Specification

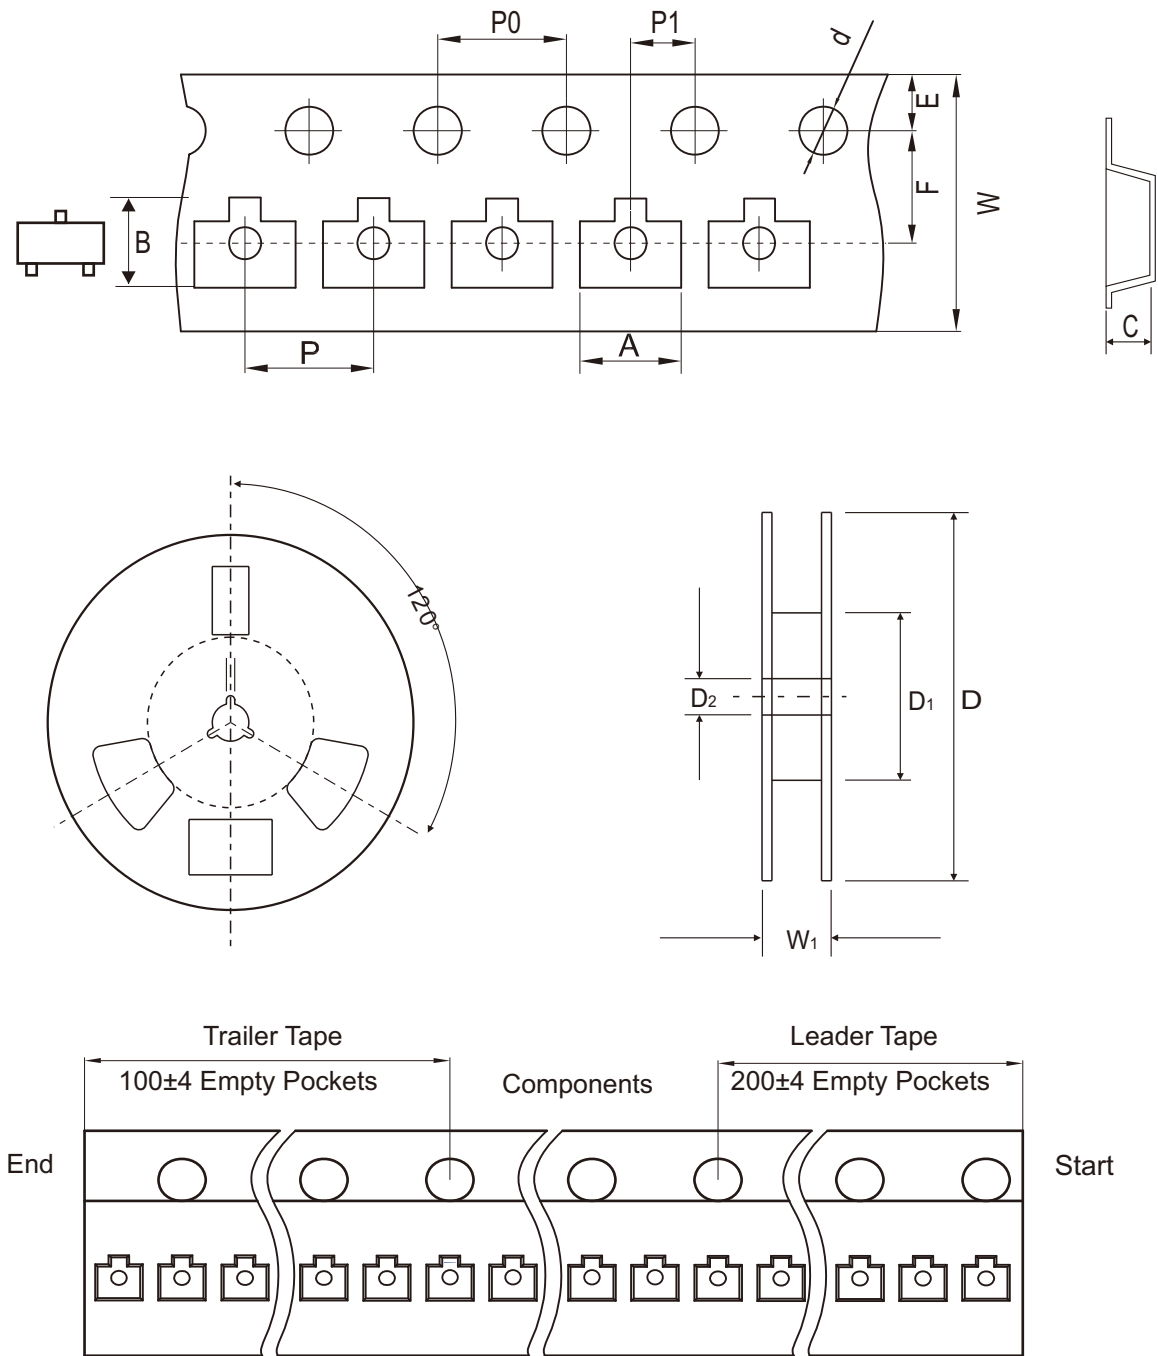


SOT-723	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	1.33 ± 0.05	1.45 ± 0.05	0.61 ± 0.05	1.50 ± 0.10	178 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.052 ± 0.002	0.057 ± 0.002	0.024 ± 0.002	0.059 ± 0.004	7.008 ± 0.078	2.142 ± 0.039	0.512 ± 0.039

SOT-723	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	2.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	8.00 + 0.30 / - 0.10	12.30 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.079 ± 0.004	0.158 ± 0.004	0.079 ± 0.004	0.315 + 0.012 / - 0.004	0.484 ± 0.039

Marking Code


Part Number	Marking Code
2SC5658Q-HF	BQ
2SC5658R-HF	BR
2SC5658S-HF	BS



xx = Product type marking code

Suggested P.C.B. PAD Layout

SIZE	SOT-723	
	(mm)	(inch)
A	0.42	0.017
B	0.30	0.012
C	0.30	0.012
D	0.32	0.013
E	0.80	0.031
F	1.00	0.039

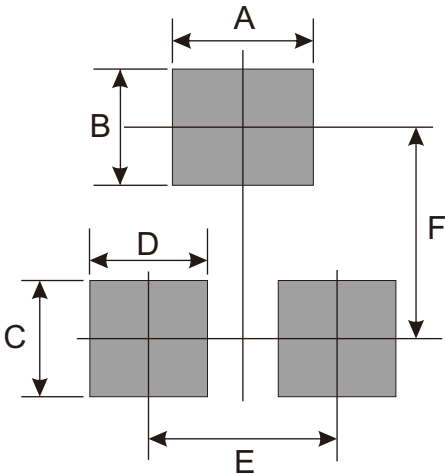

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-723	8,000	7