

# CMS12P03Q8-HF

P-Channel  
RoHS Device  
Halogen Free





## Features

- High power and current handling capability.
- Surface mount package.

## Mechanical data

- Case: SOP-8, molded plastic.
- Mounting position: Any.

## Circuit Diagram

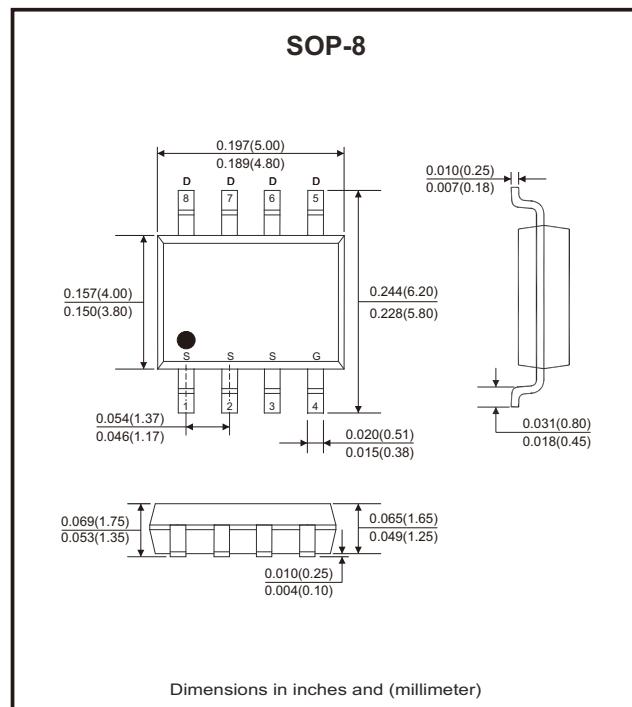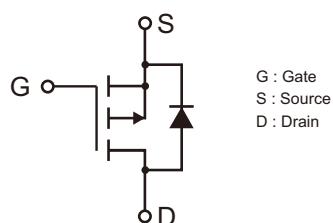

## Maximum Ratings (at Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-source voltage	V <sub>DS</sub>	-30	V
Gate-source voltage	V <sub>GS</sub>	±20	V
Drain current-continuous @ T <sub>c</sub> =25°C	I <sub>D</sub>	-12	A
		-8.4	
Drain current-pulsed (Note 1)	I <sub>DM</sub>	-48	A
Maximum power dissipation @ T <sub>c</sub> =25°C	P <sub>D</sub>	3	W
		1.3	
Single pulse avalanche energy (Note 2)	E <sub>AS</sub>	231	mJ
Thermal resistance junction to ambient (Note 3)	R <sub>θJA</sub>	41.67	°C/W
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150	°C

Notes: 1. Pulse width limited by maximum junction temperature.

2. E<sub>AS</sub> condition: T<sub>j</sub>=25°C, V<sub>DD</sub>=-15V, V<sub>G</sub>=10V, L=0.5mH, R<sub>G</sub>=25Ω, I<sub>AS</sub>=-34A.

3. Surface mounted on FR4 board, t ≤ 10 sec.

## Electrical Characteristics (at $T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
<b>Off Characteristics</b>						
Drain-source breakdown voltage	$\text{BV}_{\text{DSS}}$	$V_{\text{GS}} = 0\text{V}$ , $I_{\text{D}} = -250\mu\text{A}$	-30	-33		V
Zero gate voltage drain current	$I_{\text{DS}}^{\text{SS}}$	$V_{\text{DS}} = -30\text{V}$ , $V_{\text{GS}} = 0\text{V}$			-1	$\mu\text{A}$
Gate-body leakage current	$I_{\text{GSS}}$	$V_{\text{GS}} = \pm 20\text{V}$ , $V_{\text{DS}} = 0\text{V}$			$\pm 100$	nA
<b>On Characteristics (Note 1)</b>						
Gate threshold voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}} = V_{\text{GS}}$ , $I_{\text{D}} = -250\mu\text{A}$	-1	-1.5	-2.2	V
Drain-source on-state resistance	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}} = -10\text{V}$ , $I_{\text{D}} = -10\text{A}$		11.5	15	$\text{m}\Omega$
		$V_{\text{GS}} = -4.5\text{V}$ , $I_{\text{D}} = -7\text{A}$		18	25	
Forward transconductance	$g_{\text{FS}}$	$V_{\text{DS}} = -10\text{V}$ , $I_{\text{D}} = -10\text{A}$		20		S
<b>Dynamic Characteristics (Note 2)</b>						
Input capacitance	$C_{\text{iss}}$	$V_{\text{DS}} = -15\text{V}$ , $V_{\text{GS}} = 0\text{V}$ , $f = 1\text{MHz}$		2419		$\text{pF}$
Output capacitance	$C_{\text{oss}}$			318		
Reverse transfer capacitance	$C_{\text{rss}}$			262		
<b>Switching Characteristics (Note 2)</b>						
Turn-on delay time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}} = -15\text{V}$ , $I_{\text{D}} = -10\text{A}$ , $V_{\text{GS}} = -10\text{V}$ , $R_{\text{GEN}} = 1\Omega$		9		$\text{ns}$
Turn-on rise time	$t_r$			8		
Turn-off delay time	$t_{\text{d}(\text{off})}$			28		
Turn-off fall time	$t_f$			10		
Total gate charge	$Q_g$	$V_{\text{DS}} = -15\text{V}$ , $I_{\text{D}} = -10\text{A}$ , $V_{\text{GS}} = -10\text{V}$		44.4		$\text{nC}$
Gate-source charge	$Q_{\text{gs}}$			4.6		
Gate-drain charge	$Q_{\text{gd}}$			10		
<b>Drain-Source Diode Characteristics</b>						
Diode forward current (Note 3)	$I_s$				-12	A
Diode forward voltage (Note 1)	$V_{\text{SD}}$	$V_{\text{GS}} = 0\text{V}$ , $I_s = -12\text{A}$			-1.2	V

Notes: 1. Pulse width  $\leq 300\mu\text{s}$ , duty cycle  $\leq 2\%$ .

2. Guaranteed by design, not subject to production.

3. Surface mounted on FR4 board,  $t \leq 10$  sec.

## Rating and Characteristic Curves (CMS12P03Q8-HF)

Fig.1 - Power Dissipation

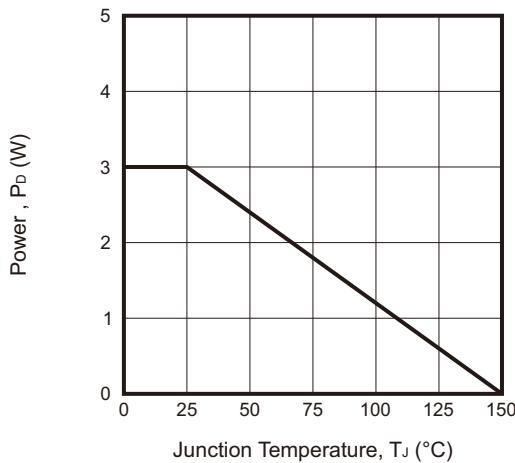


Fig.2 - Drain Current

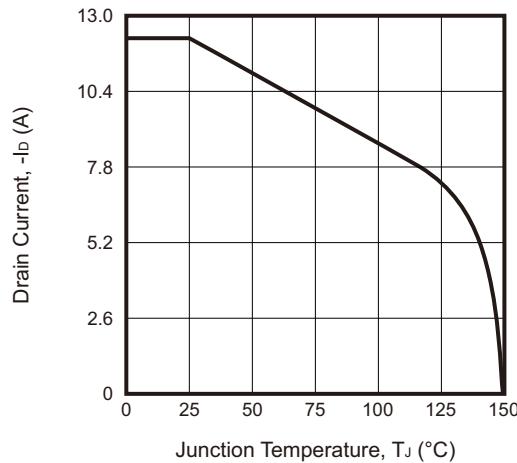


Fig.3 - Output Characteristics

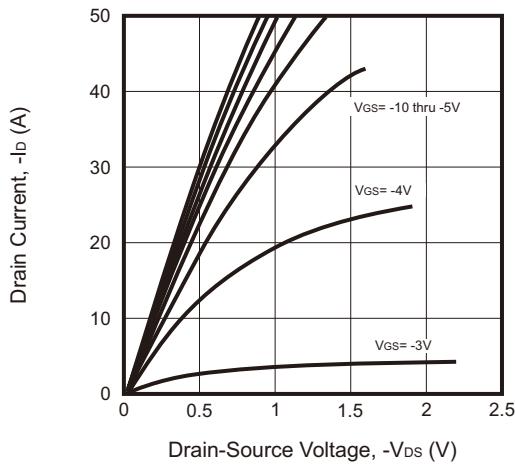


Fig.4 - Drain-Source on Resistance

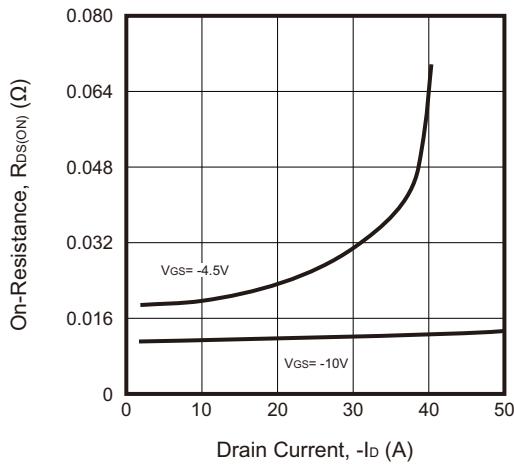


Fig.5 - Transfer Characteristics


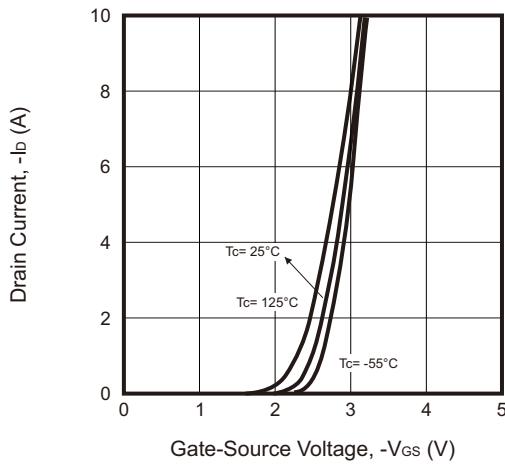


Fig.6 - Drain-Source on Resistance

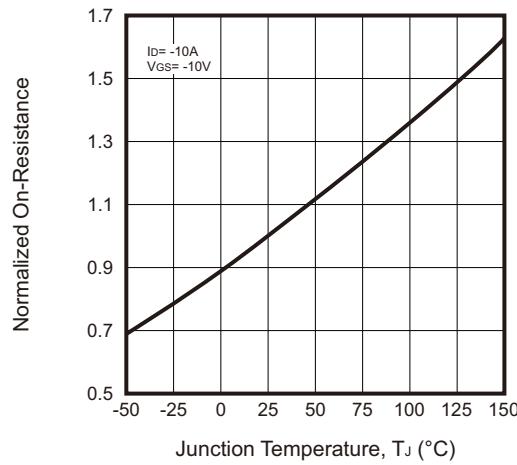

Company reserves the right to improve product design , functions and reliability without notice.

## Rating and Characteristic Curves (CMS12P03Q8-HF)

Fig.7 -  $R_{DS(ON)}$  vs  $V_{GS}$

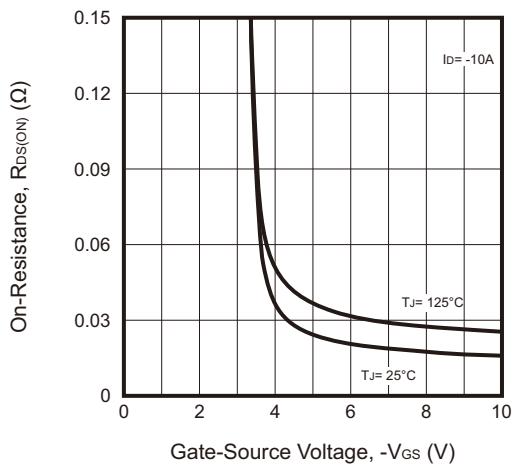


Fig.8 - Capacitance vs  $V_{DS}$

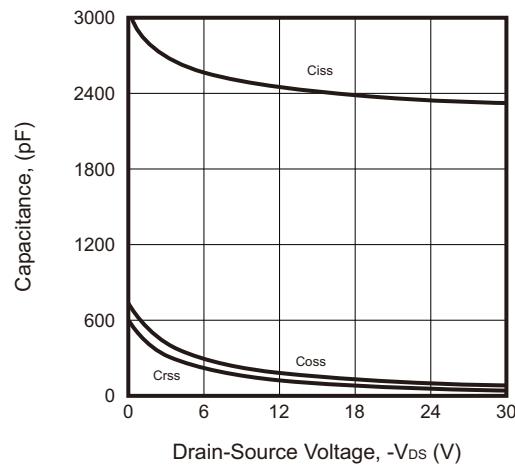


Fig.9 - Gate Charge

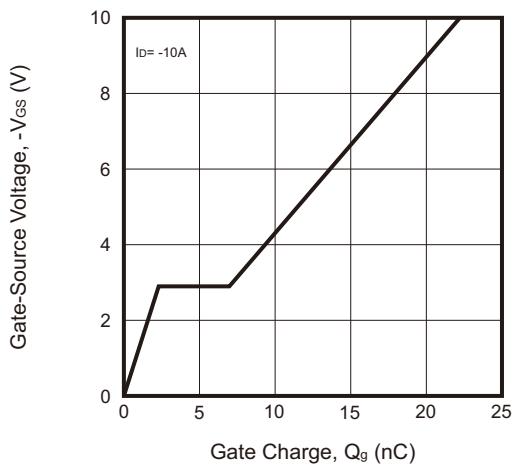


Fig.10 - Source-Drain Diode Forward





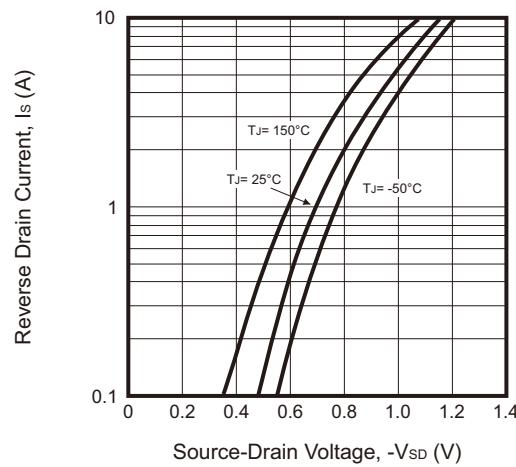


Fig.11 - Safe Operation Area

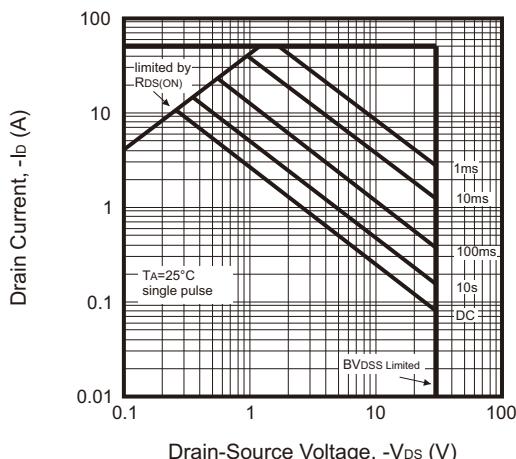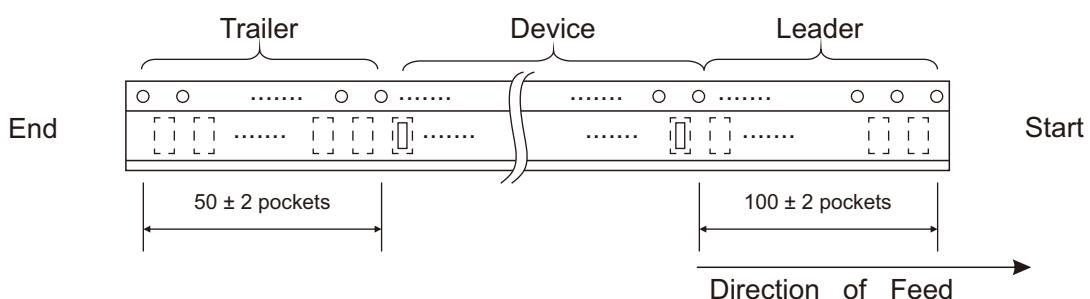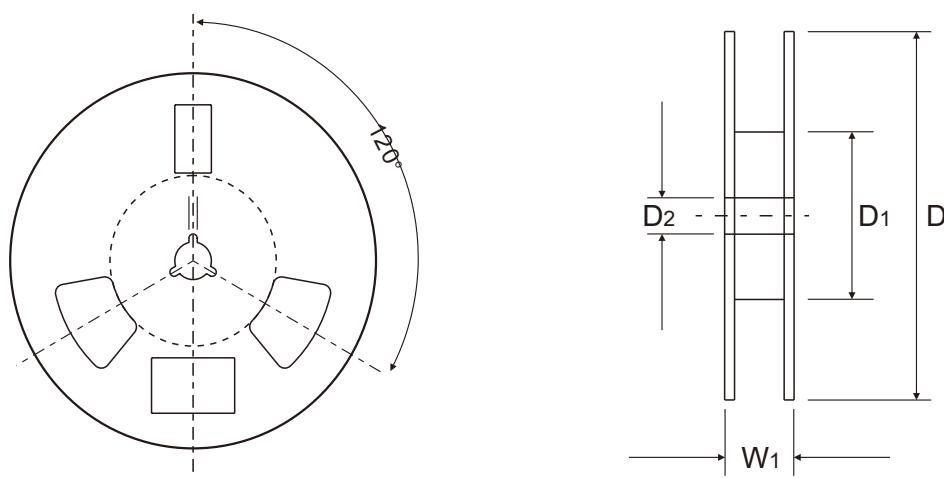

Company reserves the right to improve product design , functions and reliability without notice.

## Reel Taping Specification

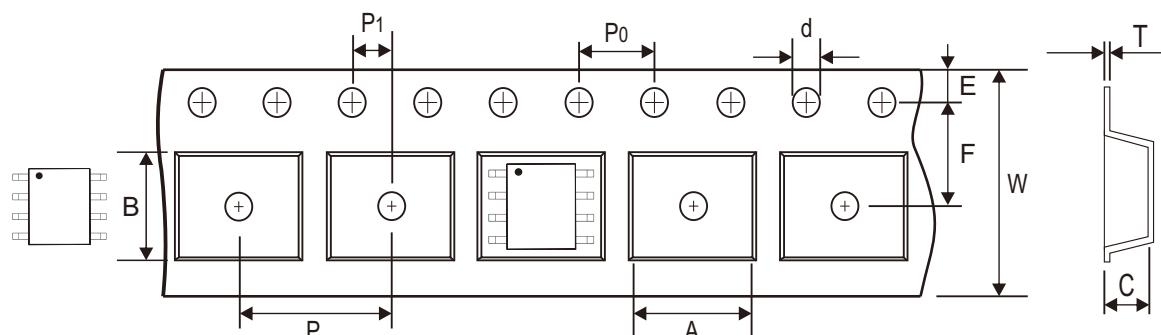

SOP-8	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	$6.40 \pm 0.10$	$5.50 \pm 0.10$	$2.10 \pm 0.10$	$1.50 + 0.30 - 0.00$	$330.00 \pm 0.25$	$100.00 \pm 0.25$	$13.00 \pm 0.25$
	(inch)	$0.252 \pm 0.004$	$0.217 \pm 0.004$	$0.083 \pm 0.004$	$0.059 + 0.012 - 0.000$	$12.992 \pm 0.010$	$3.937 \pm 0.010$	$0.512 \pm 0.010$


SOP-8	SYMBOL	E	F	P	P0	P1	T	W	W1
	(mm)	$1.75 \pm 0.10$	$5.50 \pm 0.05$	$8.00 \pm 0.10$	$4.00 \pm 0.10$	$2.00 \pm 0.05$	$0.30 \pm 0.05$	$12.00 \pm 0.30$	$17.25 \pm 0.25$
	(inch)	$0.069 \pm 0.004$	$0.217 \pm 0.002$	$0.315 \pm 0.004$	$0.157 \pm 0.004$	$0.079 \pm 0.002$	$0.012 \pm 0.002$	$0.472 \pm 0.012$	$0.679 \pm 0.010$

Company reserves the right to improve product design , functions and reliability without notice.

REV:A

## Marking Code


Part Number	Marking Code
CMS12P03Q8-HF	NCE30P12S

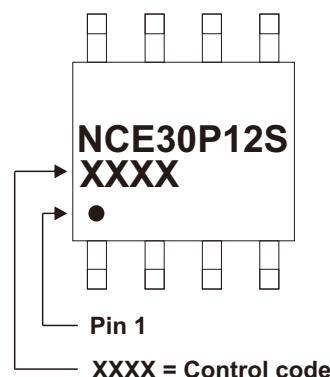

## Suggested P.C.B. PAD Layout

SIZE	SOP-8	
	(mm)	(inch)
A	0.65	0.026
B	1.27	0.050
C	3.90	0.154
D	6.90	0.272

Note: 1. The pad layout is for reference purposes only.

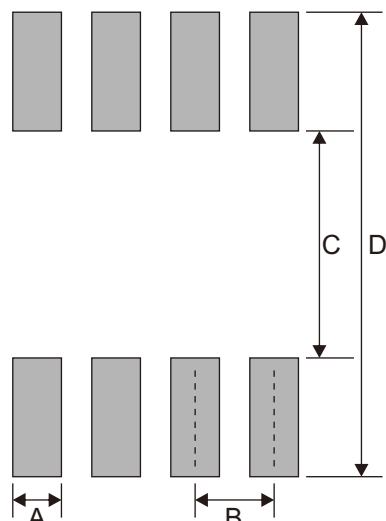

## Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOP-8	4000	13

Company reserves the right to improve product design , functions and reliability without notice.