


CMS66N06V8-HF

**N-Channel
RoHS Device
Halogen Free**





Features

- Super low gate charge.
- Green device available.
- Excellent C_{dv}/dt effect decline.
- Advanced high cell density trench technology.

Mechanical data

- Case: PDFN3x3-8L, molded plastic.
- Molding compound: UL flammability classification rating 94V-0.
- Terminals: Matte tin plated leads, solderability per MIL-STD-202, method 208.

Circuit Diagram

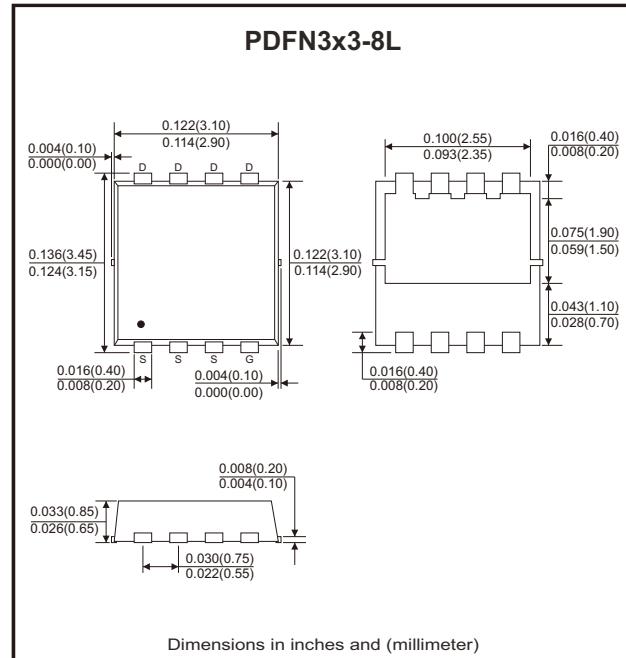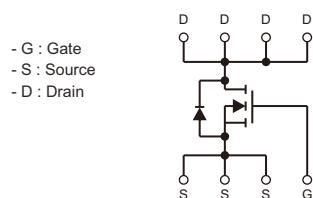

Maximum Ratings (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DSS}	60	V
Gate-source voltage	V_{GSS}	± 20	V
Continuous drain current $T_C=25^\circ\text{C}$ (Note 1)	I_D	66	A
Continuous drain current $T_C=100^\circ\text{C}$ (Note 1)	I_D	42	
Pulsed drain current ($t_p = 300\mu\text{s}$)	I_{DM}	158	A
Single pulse avalanche energy (Note 3)	E_{AS}	80	mJ
Power dissipation ($T_C=25^\circ\text{C}$)	P_D	52	W
Thermal resistance junction to case (Note 1)	$R_{\theta JC}$	2.4	$^\circ\text{C}/\text{W}$
Thermal resistance junction to air (Note 1)	$R_{\theta JA}$	42	$^\circ\text{C}/\text{W}$
Operating junction temperature range	T_J	-55 to +150	$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	V_{DSS}	$V_{GS} = 0V, I_D = 250\mu\text{A}$	60			V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = 48V, V_{GS} = 0V$			1	μA
Gate-body leakage current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 100	nA
On Characteristics						
Static drain-source on-resistance (Note 2)	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 30\text{A}$			6.5	$\text{m}\Omega$
	$R_{DS(on)}$	$V_{GS} = 4.5V, I_D = 20\text{A}$			9	$\text{m}\Omega$
Gate threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu\text{A}$	1		2.5	V
Dynamic Characteristics						
Input capacitance	C_{iss}	$V_{GS} = 0V, V_{DS} = 30V, f = 1\text{MHz}$		1625		pF
Output capacitance	C_{oss}			438		
Reverse transfer capacitance	C_{rss}			25		
Total gate charge ($V_{GS} = 4.5V$)	Q_g	$V_{DD} = 48V, V_{GS} = 10V, I_D = 15\text{A}$		17.8		nC
Gate to source charge	Q_{gs}			5.8		
Gate to drain (Miller) charge	Q_{gd}			7.9		
Switching Characteristics						
Turn-on delay time	$t_{d(on)}$	$V_{DD} = 15V, V_{GS} = 10V$ $R_G = 3.3\Omega, I_D = 15\text{A}$		7.5		ns
Turn-on rise time	t_r			6		
Turn-off delay time	$t_{d(off)}$			29		
Turn-off fall time	t_f			7.5		
Source-Drain Diode Characteristics						
Diode forward voltage	V_{SD}	$I_S = 5\text{A}, V_{GS} = 0V, T_J = 25^\circ\text{C}$			1.2	V
Reverse recovery time	t_{rr}	$I_F = 30\text{A}, T_J = 25^\circ\text{C},$ $dI/dt = 100\text{A}/\mu\text{s}$		23		ns
Reverse recovery charge	Q_{rr}			60		nC

Notes: 1. The data tested by surface mounted on a 1 inch² FR-4 board with 2oz copper.

2. The data tested by pulsed, pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.

3. The EAS data shows Max. rating. The test condition is $V_{DD}=25\text{V}, V_{GS}=10\text{V}, L=0.5\text{mH}$.

Rating and Characteristic Curves (CMS66N06V8-HF)

Fig.1 - Output Characteristics

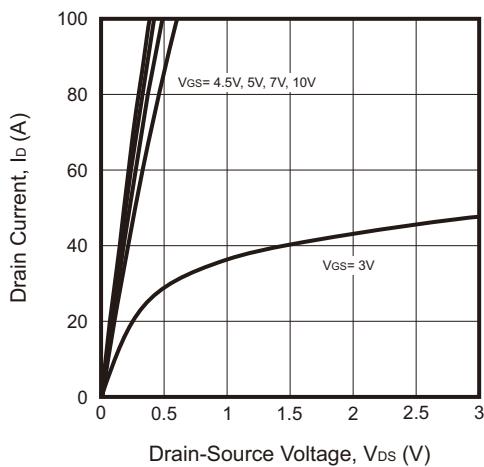


Fig.2 - On-Resistance vs. Junction Temperature

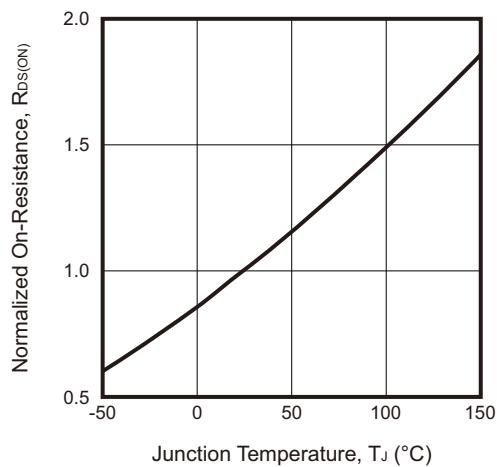


Fig.3 - On-Resistance vs. Gate-Source Voltage

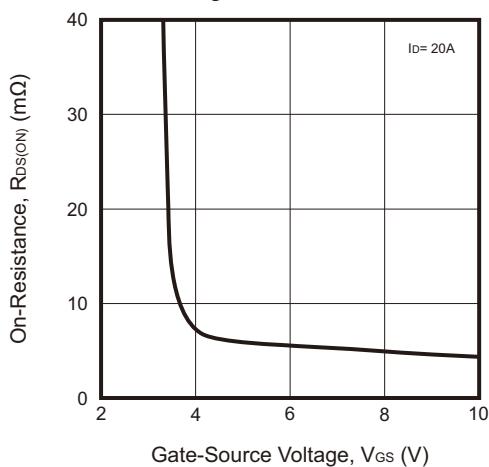


Fig.4 - Body-Diode Characteristics

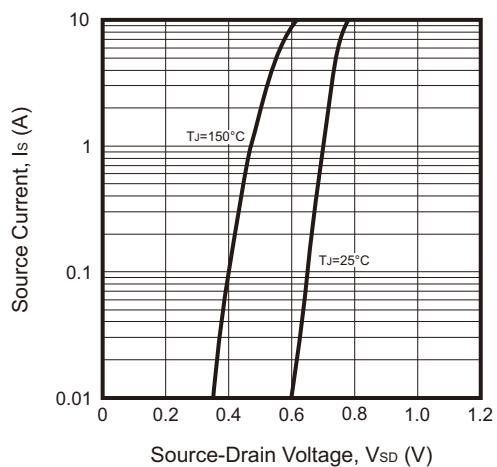


Fig.5 - Maximum Safe Operating Area


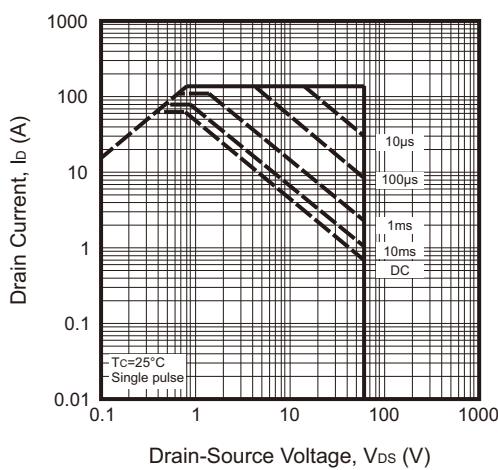


Fig.6 - Gate Threshold Voltage vs. Junction Temperature

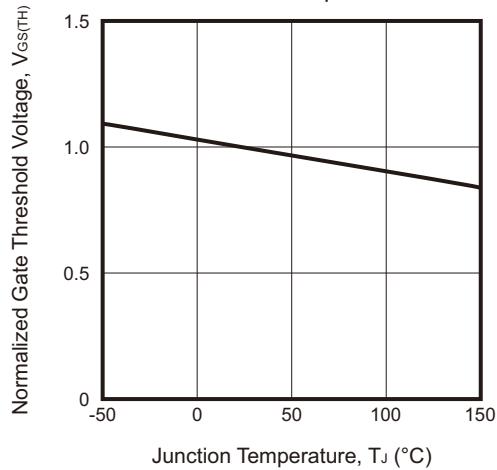

Rating and Characteristic Curves (CMS66N06V8-HF)

Fig.7 - Capacitance Characteristics



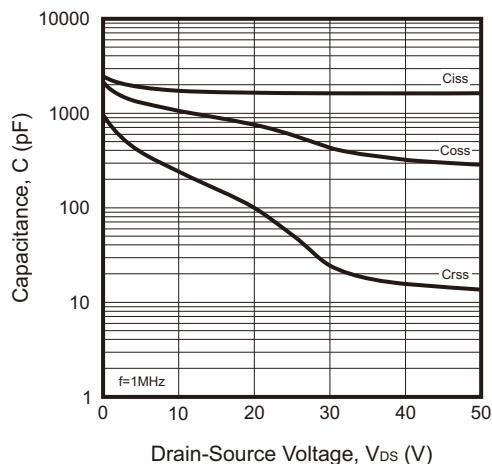


Fig.8 - Gate Charge Characteristics

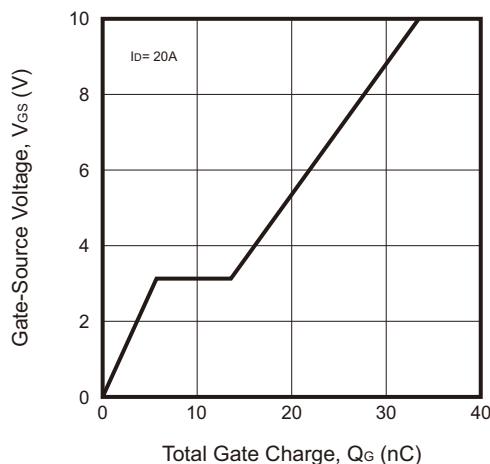

Reel Taping Specification

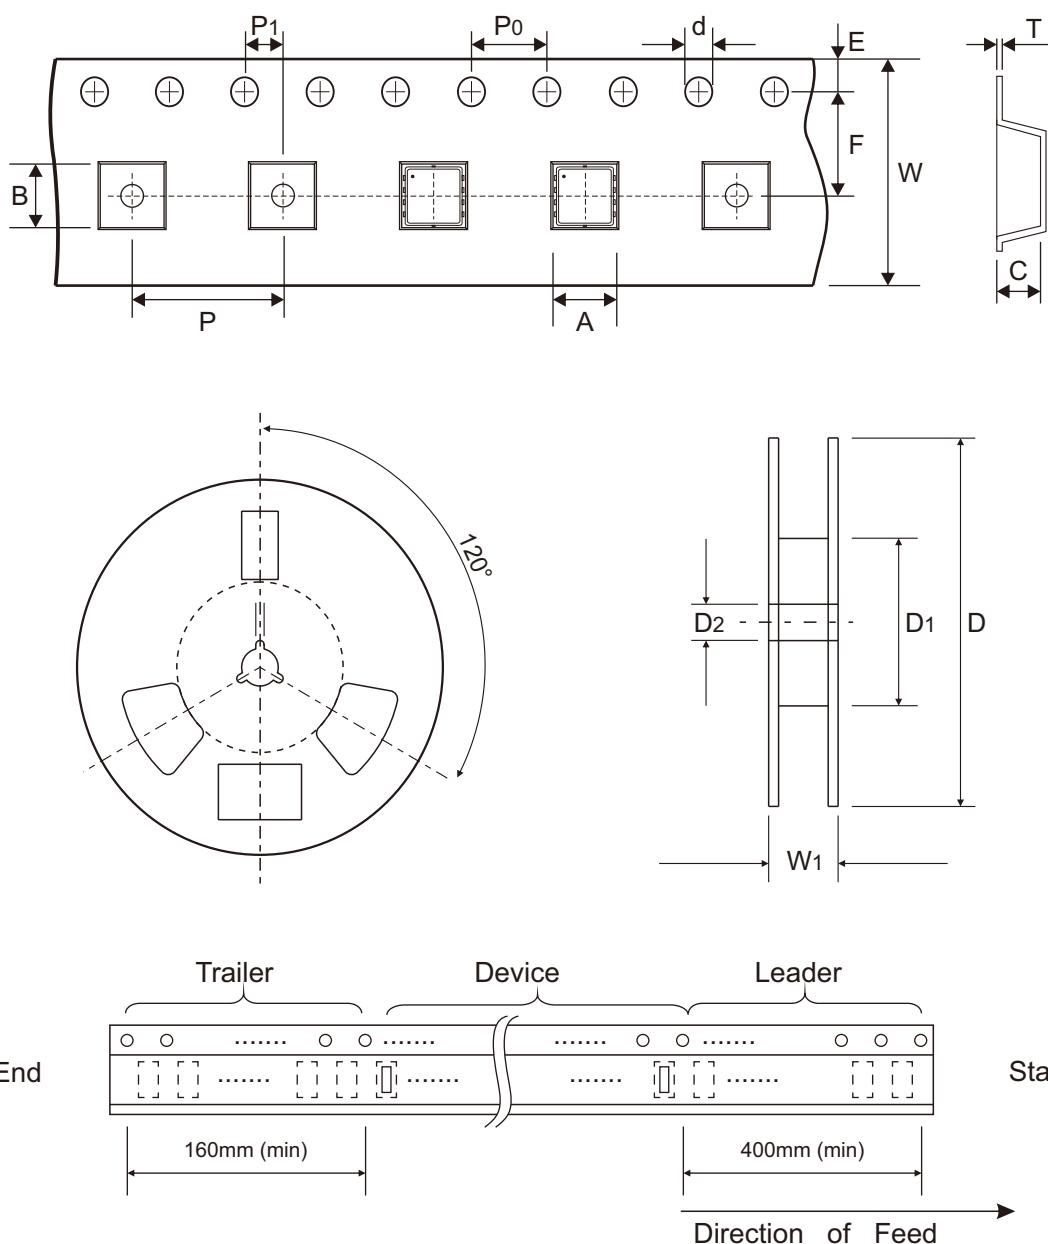


PDFN3x3 -8L	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.60 ± 0.10	3.60 ± 0.10	1.20 ± 0.10	$1.50 + 0.10$ $- 0.00$	330 ± 1.00	100 ± 1.00	13.00 ± 0.20
	(inch)	0.142 ± 0.004	0.142 ± 0.004	0.047 ± 0.004	$0.059 + 0.004$ $- 0.000$	12.992 ± 0.039	3.937 ± 0.039	0.512 ± 0.008

PDFN3x3 -8L	SYMBOL	E	F	P	P0	P1	T	W	W1
	(mm)	1.75 ± 0.10	5.50 ± 0.05	8.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	0.25 ± 0.02	$12.00 + 0.30$ $- 0.10$	17.80 ± 0.30
	(inch)	0.069 ± 0.004	0.217 ± 0.002	0.315 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.010 ± 0.001	$0.472 + 0.012$ $- 0.004$	0.701 ± 0.012


Marking Code

Part Number	Marking Code
CMS66N06V8-HF	065N06T

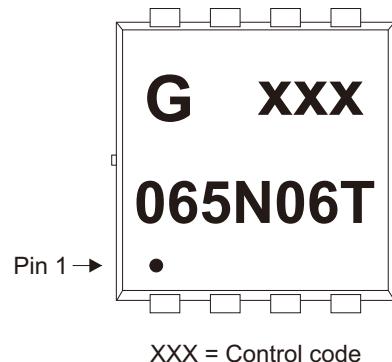

Suggested P.C.B. PAD Layout

SIZE	PDFN3x3-8L	
	(mm)	(inch)
A	0.42	0.017
B	0.70	0.028
C	0.65	0.026
D	2.25	0.089
E	2.37	0.093
F	0.42	0.017
G	0.23	0.009
H	1.85	0.073
I	3.70	0.146

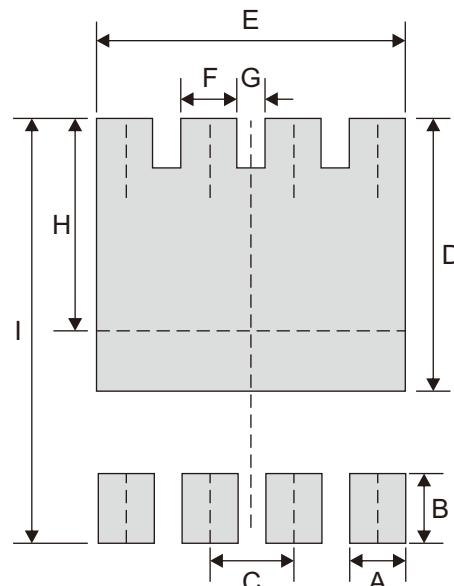

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
PDFN3x3-8L	5,000	13