


CMS29P06H8-HF

P-Channel
RoHS Device
Halogen Free





Features

- Super low gate charge.
- Excellent C_{dv}/dt effect decline.
- Advanced high cell density trench technology.

Mechanical data

- Case: PDFN5x6-8L, molded plastic.
- Molding compound: UL flammability classification rating 94V-0.
- Terminals: Matte tin plated leads, solderability per MIL-STD-202, method 208.

Circuit Diagram

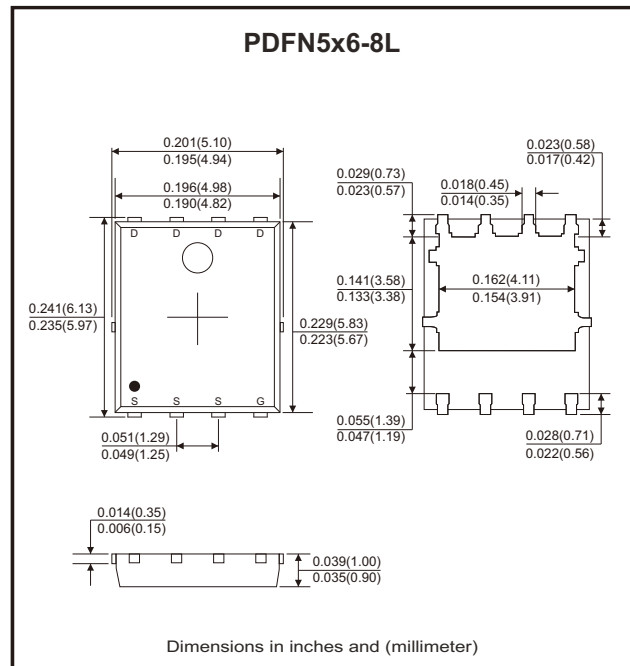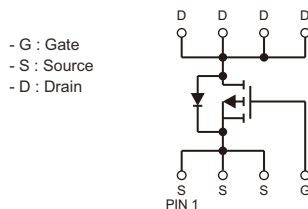

Maximum Ratings (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DSS}	-60	V
Gate-source voltage	V_{GSS}	± 20	V
Continuous drain current ($T_c=25^\circ\text{C}$)	I_D	-29	A
Continuous drain current ($T_c=100^\circ\text{C}$)	I_D	-18	
Pulsed drain current ($t_p = 10\mu\text{s}$, $T_c=25^\circ\text{C}$) (Note 1)	I_{DM}	-175	A
Avalanche energy, single pulse (Note 3)	E_{AS}	39	mJ
Power dissipation ($T_c=25^\circ\text{C}$)	P_D	40	W
Thermal resistance junction to air (Note 4)	$R_{\theta JA}$	25	$^\circ\text{C}/\text{W}$
Thermal resistance junction to case	$R_{\theta JC}$	3.1	$^\circ\text{C}/\text{W}$
Operating junction temperature range	T_J	-55 to +150	$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	V_{DSS}	$V_{GS} = 0V, I_D = -250\mu A$	-60			V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = -48V, V_{GS} = 0V, T_C = 25^\circ\text{C}$			-1	μA
		$V_{DS} = -48V, V_{GS} = 0V, T_C = 55^\circ\text{C}$			-5	μA
Gate-body leakage current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 100	nA
On Characteristics						
Static drain-source on-resistance (Note 2)	$R_{DS(on)}$	$V_{GS} = -10V, I_D = -18A$		18	25	m Ω
	$R_{DS(on)}$	$V_{GS} = -4.5V, I_D = -12A$		23	33	m Ω
Gate threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\mu A$	-1	-1.9	-2.5	V
Gate resistance	R_G	$V_{GS} = 0V, f = 1\text{ MHz}$		5.6		Ω
Dynamic Characteristics						
Input capacitance	C_{iss}	$V_{GS} = 0V, V_{DS} = -15V, f = 1\text{ MHz}$		5309		pF
Output capacitance	C_{oss}			271		
Reverse transfer capacitance	C_{rss}			257		
Switching Characteristics						
Turn-on delay time	$t_{d(on)}$	$V_{GS} = -10V, V_{DD} = -15V$ $I_D = -1A, R_G = 3.3\Omega$		38		ns
Turn-on rise time	t_r			23.6		
Turn-off delay time	$t_{d(off)}$			100		
Turn-off fall time	t_f			6.8		
Total gate charge	Q_g	$V_{GS} = -4.5V, V_{DD} = -12V, I_D = -12A$		31.5		nC
Gate to source charge	Q_{gs}			13		
Gate to drain (miller) charge	Q_{gd}			10		
Source-Drain Diode Characteristics						
Diode forward voltage (Note 2)	V_{SD}	$I_{SD} = -1A, V_{GS} = 0V$		-0.7	-1.2	V
Reverse recovery time	t_{rr}	$I_F = -5A, V_{GS} = 0V,$ $dI_F/dt = 100A/\mu s$		34.5		ns
Reverse recovery charge	Q_{rr}			34.6		nC

Notes: 1. Repetitive rating; pulse width limited by max. junction temperature.

2. The data tested by pulsed, pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.

3. The EAS data shows Max. rating. The test condition is $V_{DD}=-30V, V_{GS}=-10V, L=0.1\text{mH}$.

4. Surface mounted on 1 inch² FR-4 board with 2oz copper.

Rating and Characteristic Curves (CMS29P06H8-HF)

Fig.1 - Typical Output Characteristics

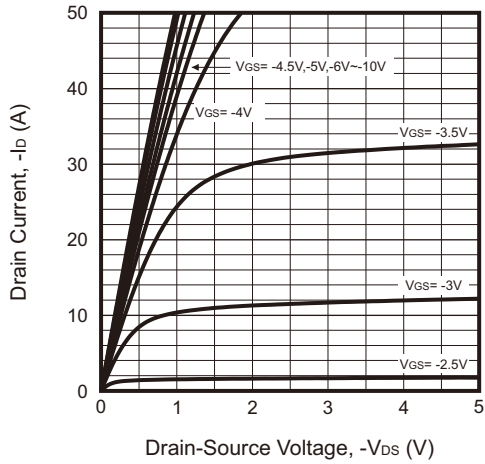


Fig.2 - On-Resistance vs. Drain Current and Gate Voltage

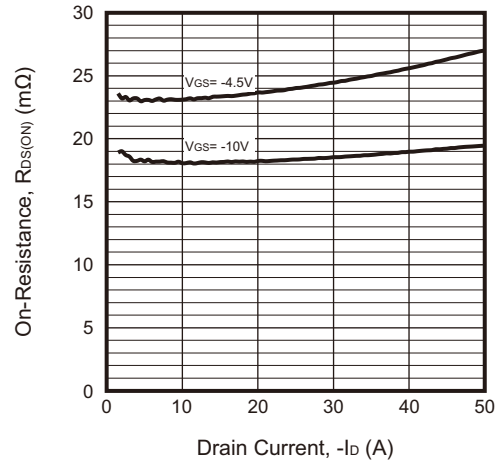


Fig.3 - On-Resistance vs. Gate-Source Voltage

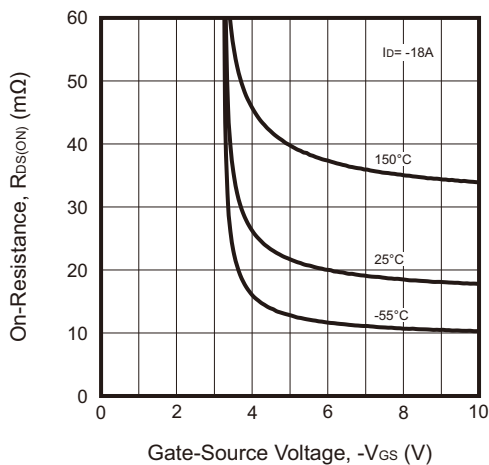


Fig.4 - Body-Diode Characteristics

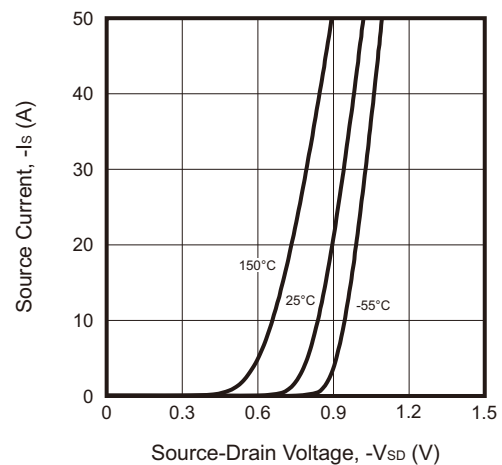


Fig.5 - Normalized On-Resistance vs. Junction Temperature


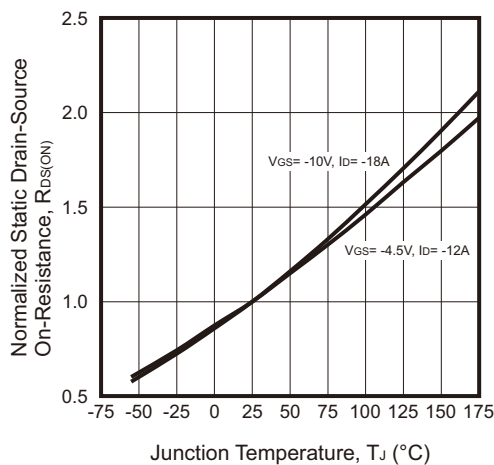


Fig.6 - Transfer Characteristics

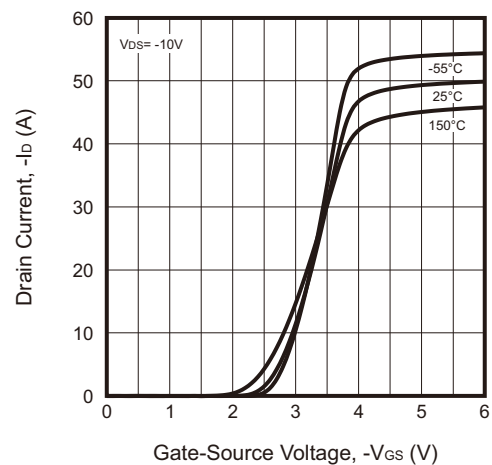

Rating and Characteristic Curves (CMS29P06H8-HF)

Fig.7 - Capacitance Characteristics

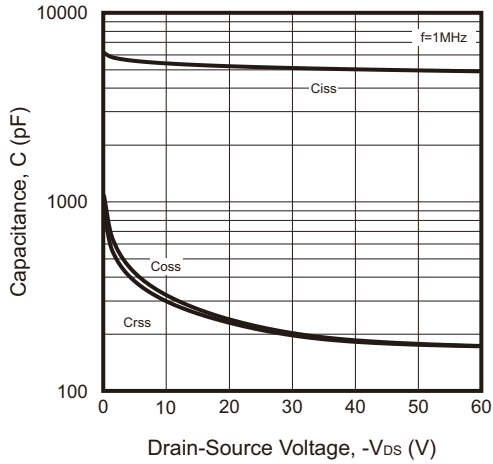


Fig.8 - Gate Charge Characteristics

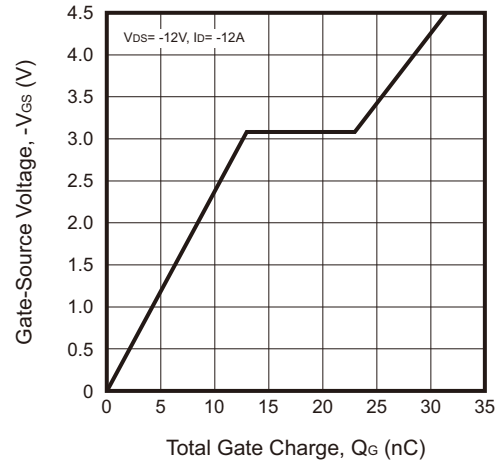


Fig.9 - Normalized Breakdown Voltage vs. Junction Temperature

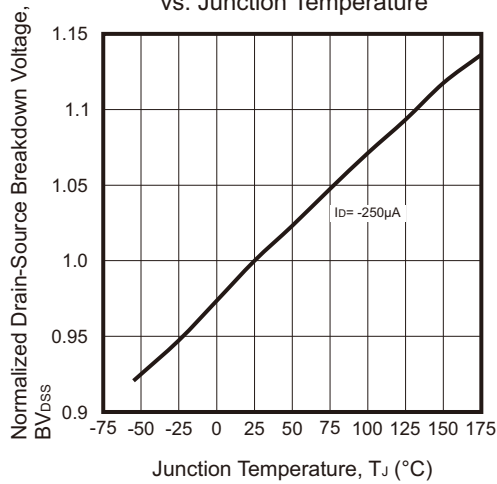


Fig.10 - Normalized VGS(th) vs. Junction Temperature






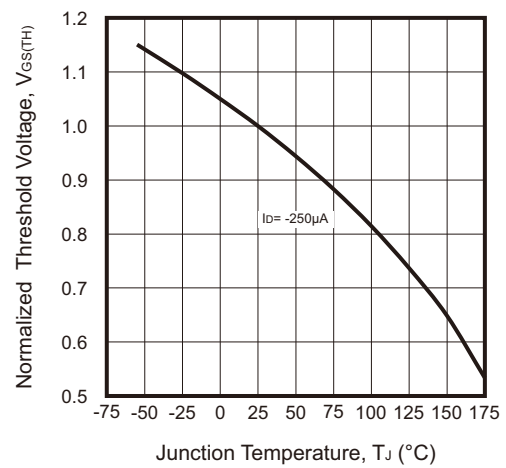


Fig.11 - Safe Operating Area

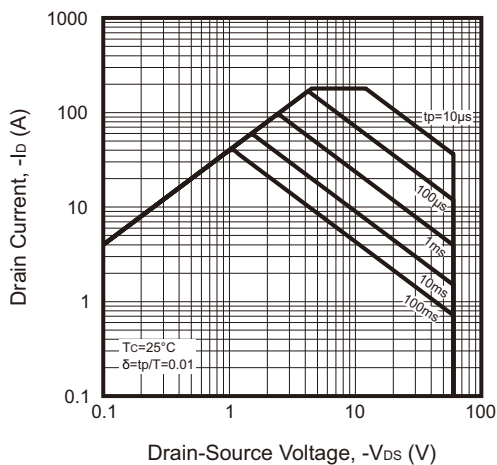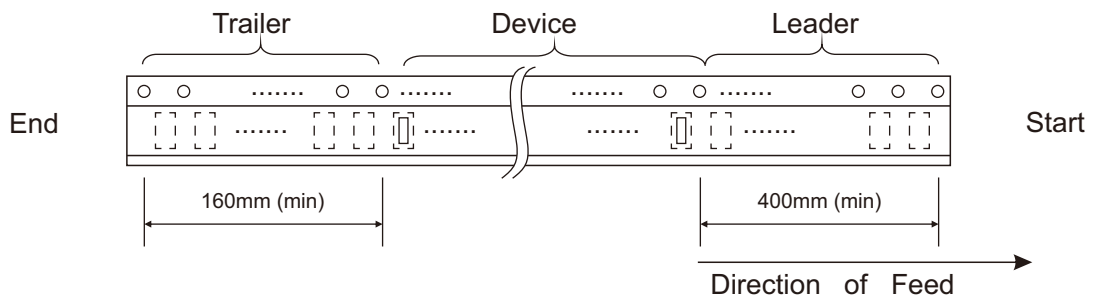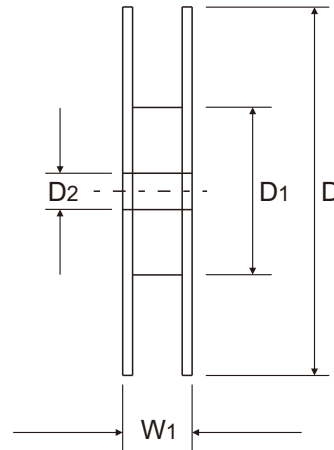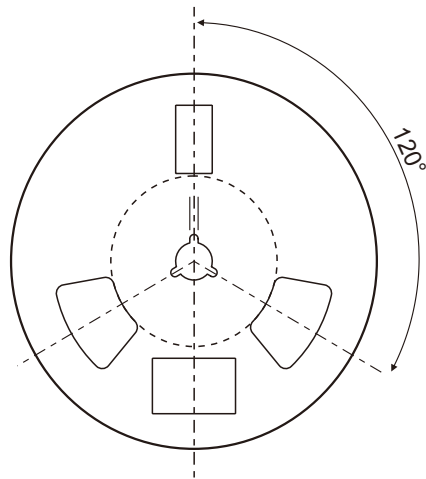

Reel Taping Specification

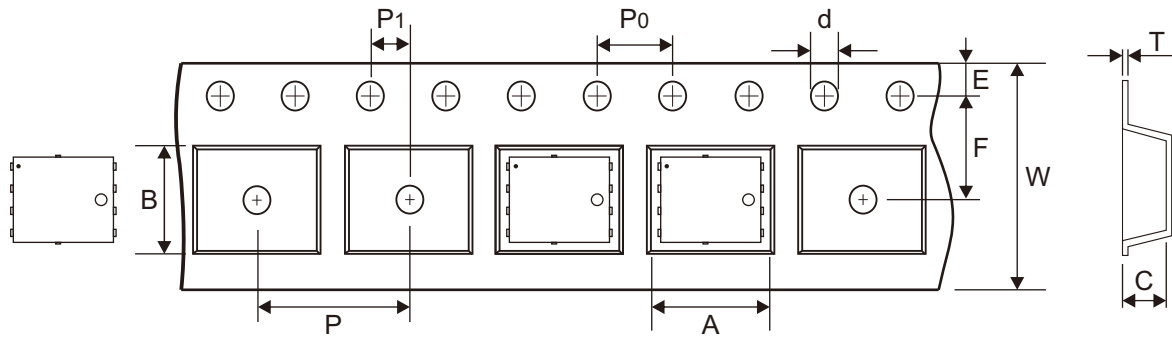


PDFN5x6 -8L	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	6.30 ± 0.10	5.30 ± 0.10	1.20 ± 0.10	1.55 + 0.01	330 ± 1.00	100 ± 1.00	13.00 ± 0.20
	(inch)	0.248 ± 0.004	0.209 ± 0.004	0.047 ± 0.004	0.061 + 0.0004	12.992 ± 0.039	3.937 ± 0.039	0.512 ± 0.008

PDFN5x6 -8L	SYMBOL	E	F	P	P0	P1	T	W	W1
	(mm)	1.75 ± 0.10	5.50 ± 0.10	8.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	0.25 ± 0.03	12.00 + 0.30 - 0.10	17.80 ± 0.30
	(inch)	0.069 ± 0.004	0.217 ± 0.004	0.315 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.010 ± 0.001	0.472 + 0.012 - 0.004	0.701 ± 0.012

Marking Code


Part Number	Marking Code
CMS29P06H8-HF	250P06

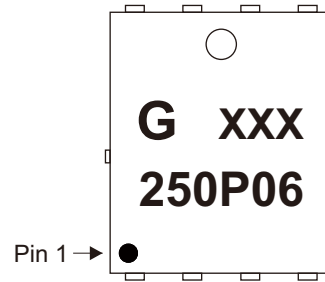

XXX = Control code

Suggested P.C.B. PAD Layout

SIZE	PDFN5x6-8L	
	(mm)	(inch)
A	0.80	0.031
B	1.00	0.039
C	1.27	0.050
D	0.47	0.019
E	0.80	0.031
F	0.85	0.033
G	4.50	0.177
H	4.60	0.181

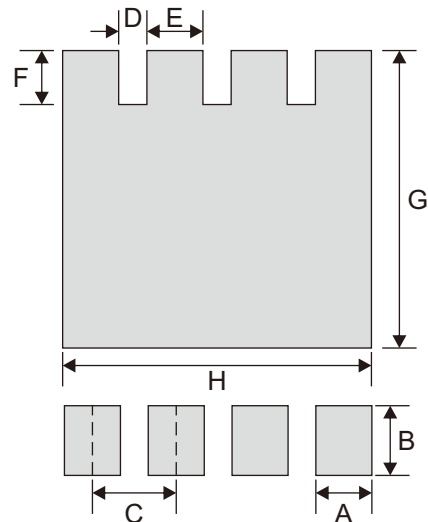

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
PDFN5x6-8L	5,000	13