


CMSN3134KT-HF

N-Channel
RoHS Device
Halogen Free





Features

- Surface mount package.
- N-Channel switch with Low $R_{DS(on)}$.
- Operated at low logic level gate drive.

Mechanical data

- Case: SOT-23, molded plastic.
- Mounting position: Any.

Circuit Diagram

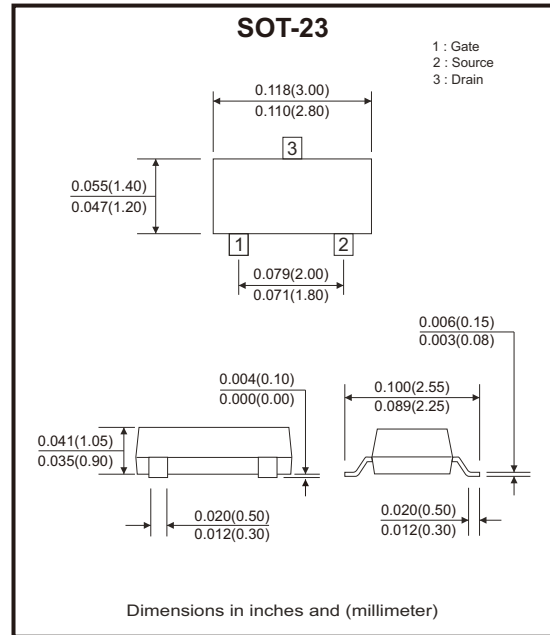

Maximum Ratings (at $T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DS}	20	V
Typical gate-source voltage	V_{GS}	± 12	V
Continuous drain current (Note 1)	I_D	0.75	A
Pulsed drain current @ $t_p=10\mu\text{s}$	I_{DM}	1.8	A
Power dissipation (Note 1)	P_D	350	mW
Thermal resistance, junction to ambient (Note 1)	$R_{\theta JA}$	357	$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$
Lead temperature for soldering purpose (1/8" duration for 10s)	T_L	260	$^\circ\text{C}$

Electrical Characteristics (at Ta=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Static characteristics						
Drain-source breakdown voltage	BV _{DSS}	V _{GS} = 0V, I _D = 250μA	20			V
Zero gate voltage drain current	I _{DSS}	V _{DS} = 20V, V _{GS} = 0V			1	μA
Gate-body leakage current	I _{GSS}	V _{GS} = ±10V, V _{DS} = 0V			±20	μA
Gate threshold voltage (Note 2)	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	0.35	0.54	1.1	V
Drain-source on-state resistance (Note 2)	R _{DS(on)}	V _{GS} = 4.5V, I _D = 0.65A		270	380	mΩ
		V _{GS} = 2.5V, I _D = 0.55A		320	450	
		V _{GS} = 1.8V, I _D = 0.45A		390	800	
Forward transconductance (Note 2)	g _{fs}	V _{DS} = 10V, I _D = 0.8A		1.6		S
Drain forward voltage	V _{SD}	I _S = 0.15A, V _{GS} = 0V			1.2	V
Dynamic characteristics (Note 4)						
Input capacitance	C _{iss}	V _{DS} = 16V, V _{GS} = 0V, f = 1MHz		79	120	pF
Output capacitance	C _{oss}			13	20	
Reverse transfer capacitance	C _{rss}			9	15	
Switching characteristics (Note 4)						
Turn-on delay time (Note 3)	t _{d(on)}	V _{GS} = 4.5V, V _{DS} = 10V I _D = 500mA, R _{GEN} = 10Ω		6.7		nS
Turn-on rise time (Note 3)	t _r			4.8		
Turn-off delay time (Note 3)	t _{d(off)}			17.3		
Turn-off fall time (Note 3)	t _f			7.4		

- Notes: 1. Surface mounted on FR4 board using the minimum recommended pad size.
 2. Pulse width = 300 μs , duty cycle = 2%.
 3. Switching characteristics are independent of operating junction temperatures.
 4. Guaranteed by design, not subject to production.

Typical Rating and Characteristic Curves (CMSN3134KT-HF)

Fig.1 - Output Characteristics

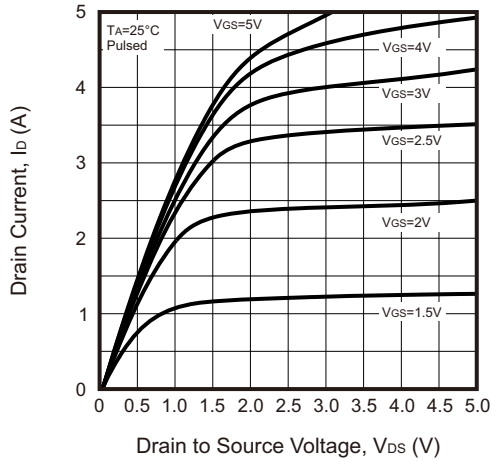


Fig.2 - Transfer Characteristics

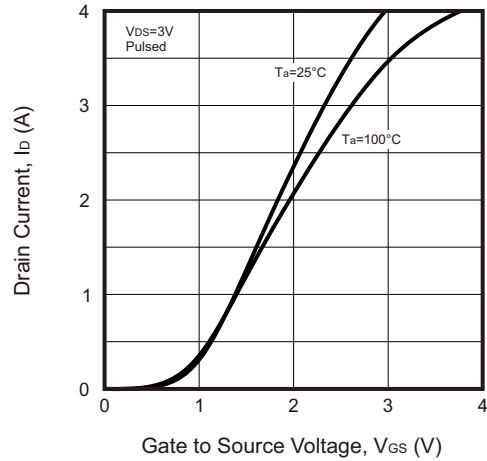


Fig.3 - $R_{DS(ON)}$ — I_D

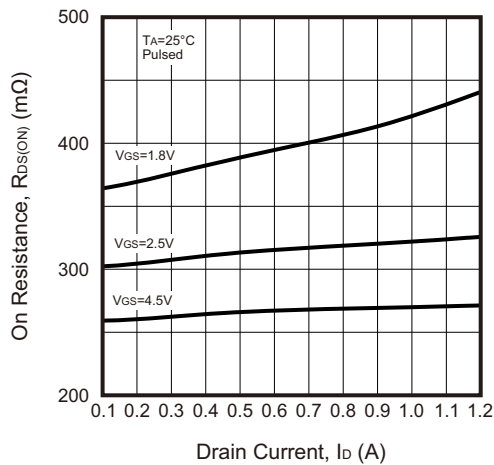


Fig.4 - On-Resistance vs. Gate to Source Voltage

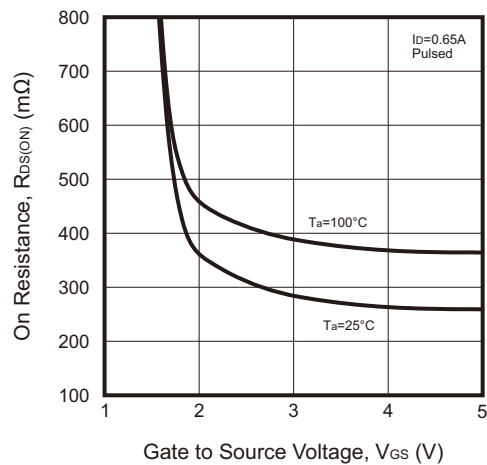


Fig.5 - I_S — V_{SD}



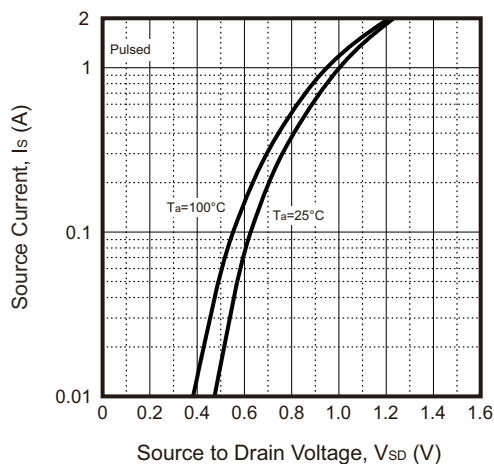


Fig.6 - Threshold Voltage

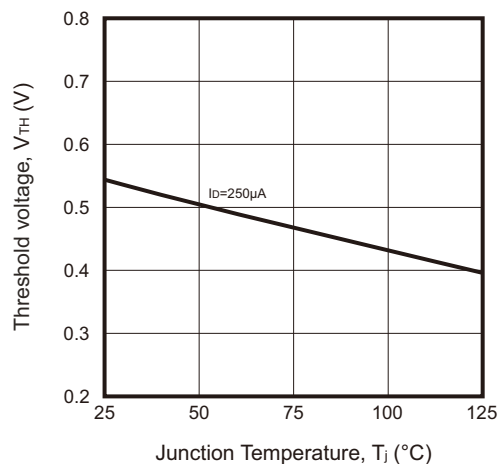

Reel Taping Specification

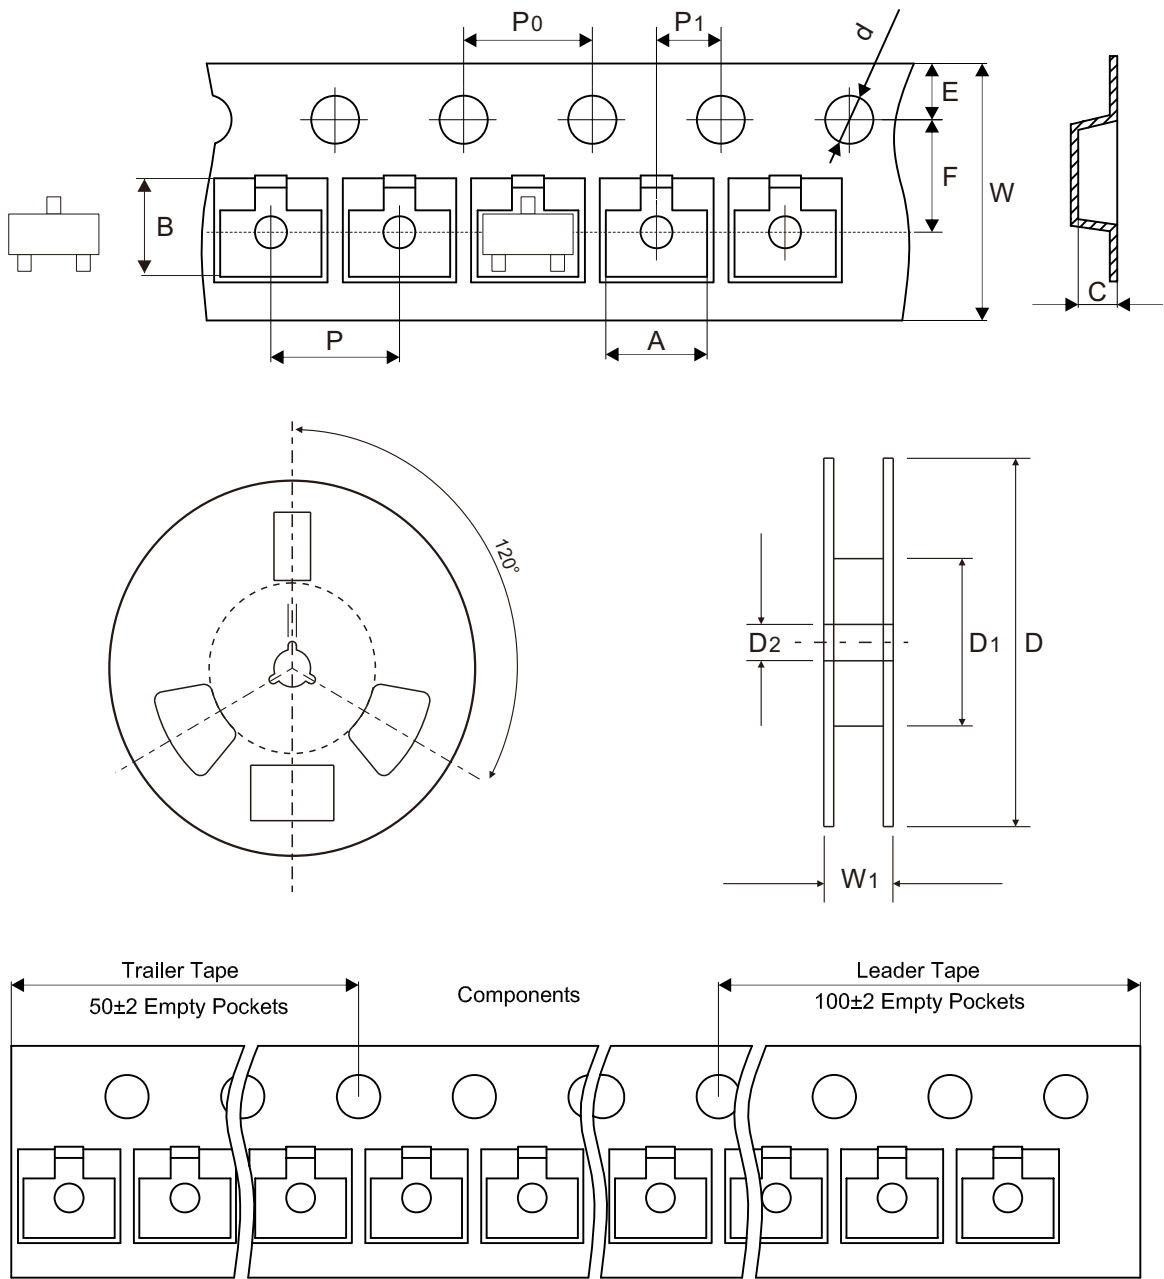

SOT-23	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.15 ± 0.10	2.77 ± 0.10	1.22 ± 0.10	1.50 + 0.10 - 0.00	178.00 ± 1.00	54.40 ± 0.40	13.00 ± 0.20
	(inch)	0.124 ± 0.004	0.109 ± 0.004	0.048 ± 0.004	0.059 + 0.004 - 0.000	7.008 ± 0.039	2.142 ± 0.016	0.512 ± 0.008

SOT-23	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	8.00 + 0.30 - 0.10	12.10 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.315 + 0.012 - 0.004	0.476 ± 0.039

Marking Code


Part Number	Marking Code
CMSN3134KT-HF	34K



Solid dot = Control code

Suggested P.C.B. PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.90	0.035
B	0.80	0.031
C	0.95	0.037
D	2.00	0.079
E	2.90	0.114

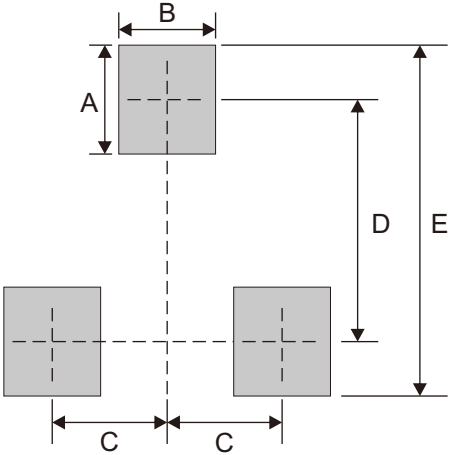

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7