


DTA123ECA-HF (PNP)

RoHS Device
Halogen Free





Features

- Built-in biasing resistors
(R1=2.2kΩ, R2=2.2kΩ)

Mechanical data

- Case: SOT-23, molded plastic.
- Terminals: Matte tin-plated leads, solderability
per MIL-STD-202, method 208.
- Mounting position: Any.

Circuit Diagram

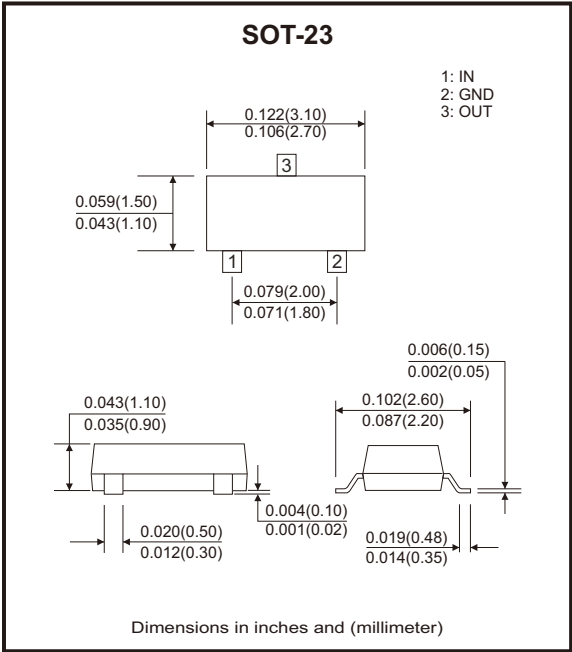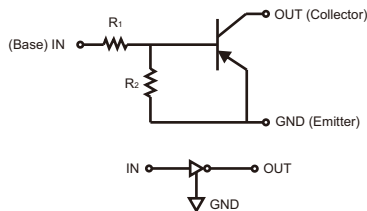

Maximum Ratings (at Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Units
Supply voltage	V _{CC}	-50	V
Input voltage	V _I	-12 to +10	V
Output current	I _O	-100	mA
Max. collector current	I _C	-100	mA
Power dissipation	P _D	200	mW
Operating junction temperature range	T _J	-55 to +150	°C
Storage temperature range	T _{STG}	-55 to +150	°C

Electrical Characteristics (at Ta=25°C unless otherwise noted)

Parameter	Symbol	Test conditions	Min	Typ	Max	Units
Input voltage	$V_{I(off)}$	$V_{CC} = -5V, I_o = -100\mu A$	-0.5			V
Input voltage	$V_{I(on)}$	$V_o = -0.3V, I_o = -20mA$			-3	
Output voltage	$V_{O(on)}$	$I_o = -10mA, I_i = -0.5mA$			-0.3	V
Input current	I_i	$V_i = -5V$			-3.8	mA
Output current	$I_{O(off)}$	$V_{CC} = -50V, V_i = 0V$			-0.5	μA
DC current gain	G_i	$V_o = -5V, I_o = -20mA$	20			
Input resistor	R_1		1.54	2.2	2.86	k Ω
Resistance ratio	R_2/R_1		0.8	1	1.2	
Gain-bandwidth product	f_r	$V_{CE} = -10V, I_E = -5mA, f = 100MHz$		250		MHz

Typical Rating and Characteristic Curves (DTA123ECA-HF)

Fig.1 - Input Voltage vs. Output Current

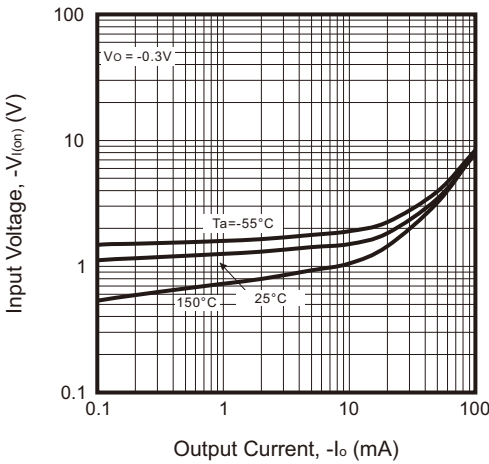


Fig.2 - Output Current vs. Input Voltage

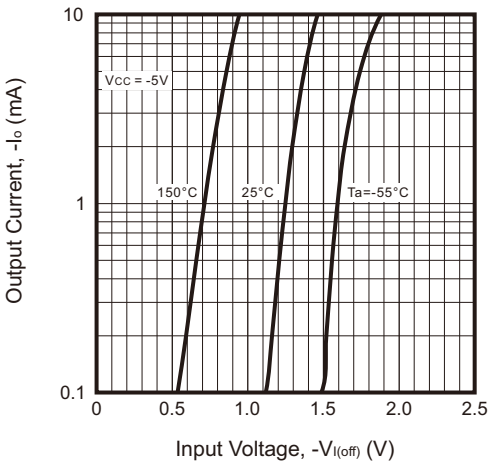


Fig.3 - DC Current Gain vs. Output Current



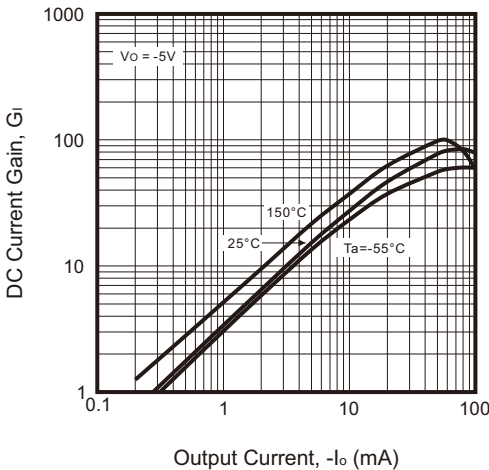


Fig.4 - Output Voltage vs. Output Current

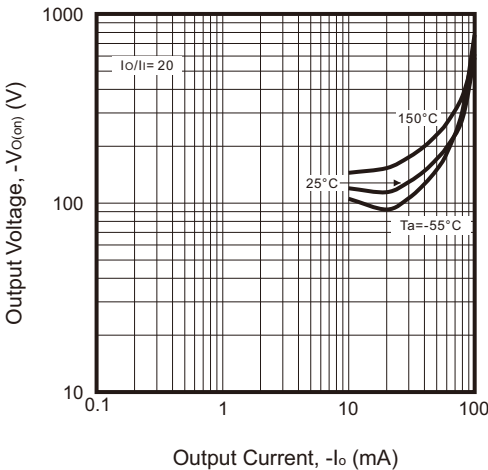

Reel Taping Specification

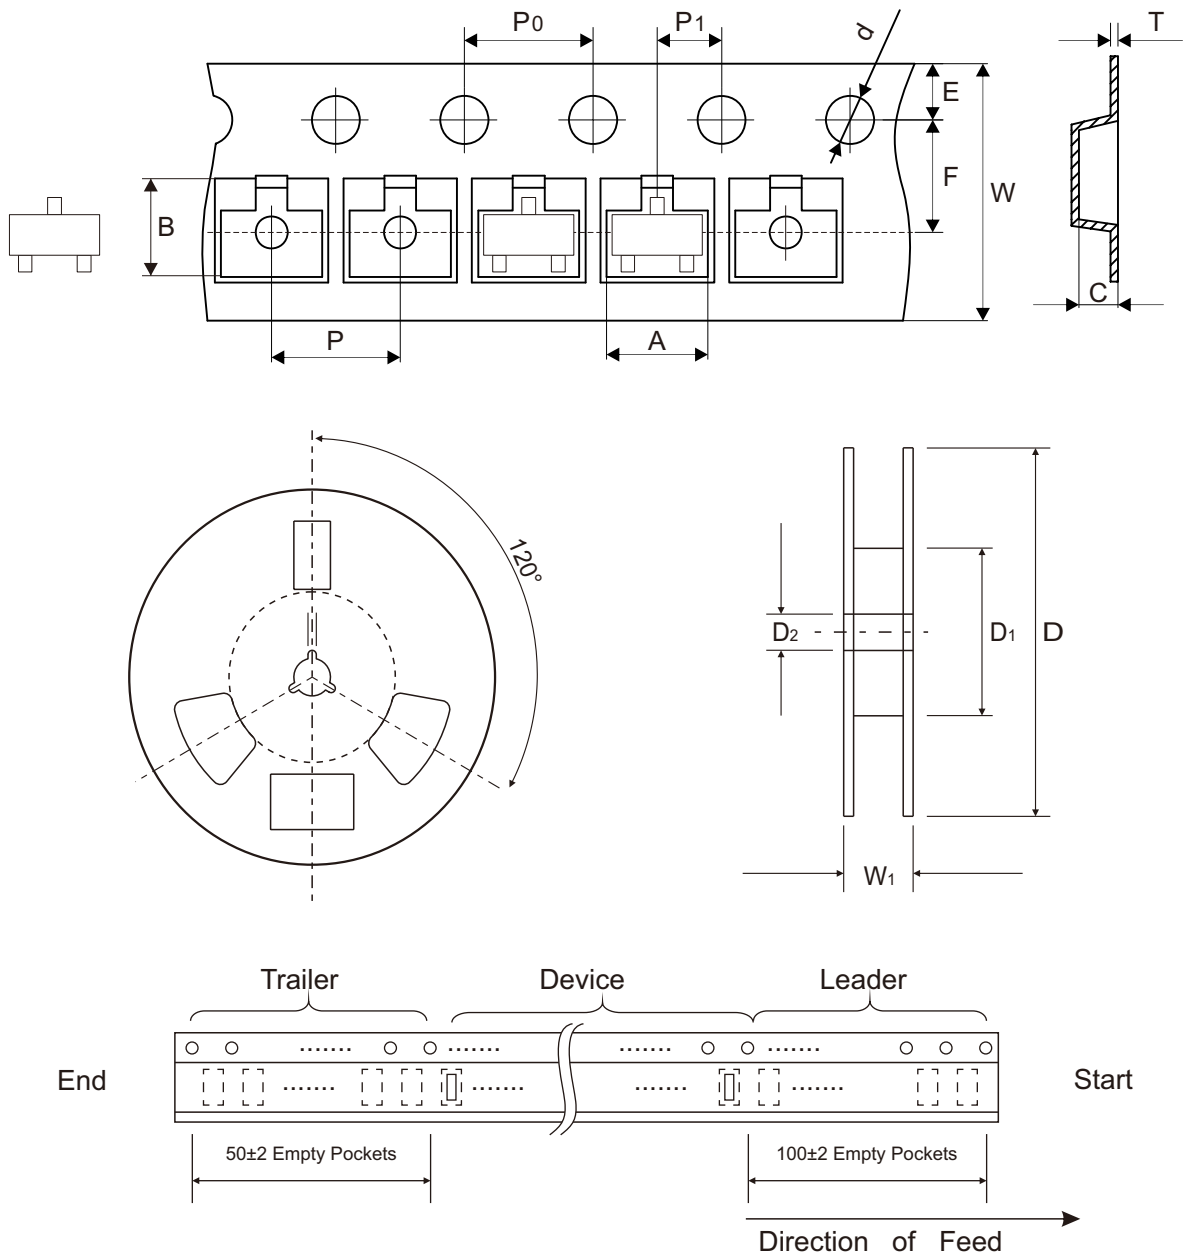


SOT-23	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.15 ± 0.10	2.77 ± 0.10	1.22 ± 0.10	1.50 ± 0.10	178.00 ± 1.00	54.00 ± 0.50	13.00 ± 0.50
	(inch)	0.124 ± 0.004	0.109 ± 0.004	0.048 ± 0.004	0.059 ± 0.004	7.008 ± 0.039	2.126 ± 0.020	0.512 ± 0.020

SOT-23	SYMBOL	E	F	P	P0	P1	T	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	0.20 ± 0.02	8.00 ± 0.30	12.50 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.008 ± 0.001	0.315 ± 0.012	0.492 ± 0.039


Marking Code

Part Number	Marking Code
DTA123ECA-HF	12



Suggested P.C.B. PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.90	0.035
B	0.80	0.031
C	0.95	0.037
D	2.00	0.079
E	2.90	0.114

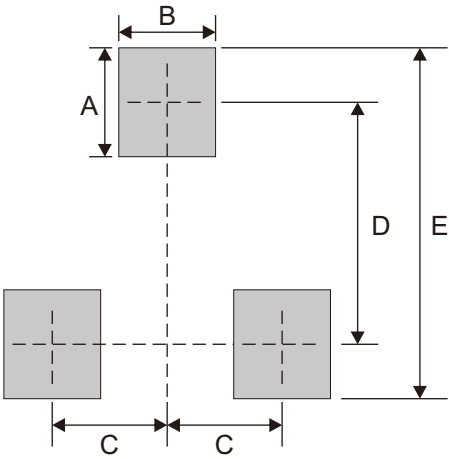

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7