

MMBT5551-HF (NPN)

RoHS Device
Halogen Free





Features

- Epoxy meets UL-94 V-0 flammability rating.
- Moisture sensitivity Level 1.

Mechanical data

- Case: SOT-23, molded plastic.
- Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102.

Circuit Diagram

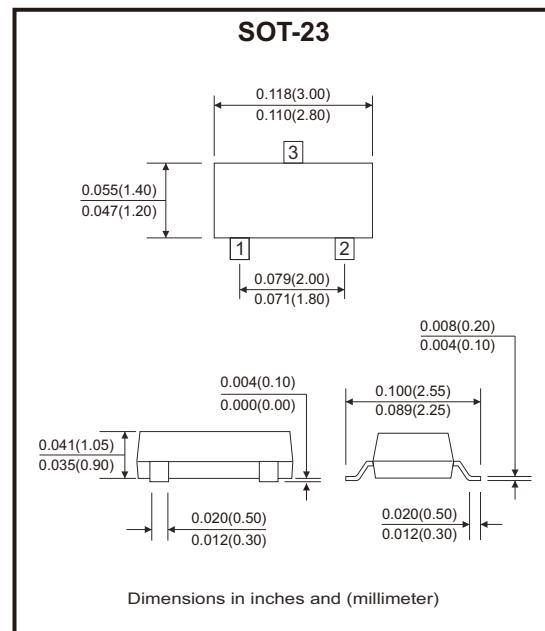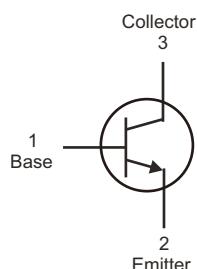

Maximum Ratings (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	Value	Unit
Collector-base voltage	$I_C = 100\mu\text{A}_{\text{dc}}, I_E = 0$	V_{CB0}	180	V
Collector-emitter voltage	$I_C = 1\text{mA}_{\text{dc}}, I_B = 0$	V_{CE0}	160	V
Emitter-base voltage	$I_E = 10\mu\text{A}_{\text{dc}}, I_C = 0$	V_{EB0}	6	V
Collector current		I_C	600	mA
Collector power dissipation		P_C	300	mW
Operation junction temperature range		T_J	-55 to +150	°C
Storage temperature range		T_{STG}	-55 to +150	°C
Thermal resistance from junction to ambient		$R_{\theta JA}$	417	°C/W

Electrical Characteristics (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Collector-base breakdown voltage	V_{CBO}	$I_C = 100\mu\text{A}_{\text{dc}}, I_E = 0$	180			V
Collector-emitter breakdown voltage	V_{CEO}	$I_C = 1\text{mA}_{\text{dc}}, I_B = 0$	160			V
Emitter-base breakdown voltage	V_{EBO}	$I_E = 10\mu\text{A}_{\text{dc}}, I_C = 0$	6			V
Collector cut-off current	I_{CBO}	$V_{CB} = 120\text{V}_{\text{dc}}$			50	nA
Emitter cut-off current	I_{EBO}	$V_{EB} = 4\text{V}_{\text{dc}}$			50	nA
DC current gain	$h_{FE(1)}$	$V_{CE} = 5\text{V}_{\text{dc}}, I_C = 1\text{mA}$	80			
	$h_{FE(2)}$	$V_{CE} = 5\text{V}_{\text{dc}}, I_C = 10\text{mA}$	100		300	
	$h_{FE(3)}$	$V_{CE} = 5\text{V}_{\text{dc}}, I_C = 50\text{mA}$	30			
Collector-emitter saturation voltage	$V_{CE(\text{sat})}$	$I_C = 10\text{mA}, I_B = 1\text{mA}$			0.15	V
		$I_C = 50\text{mA}, I_B = 5\text{mA}$			0.20	V
Base-emitter saturation voltage	$V_{BE(\text{sat})}$	$I_C = 10\text{mA}, I_B = 1\text{mA}$			1	V
		$I_C = 50\text{mA}, I_B = 5\text{mA}$			1	V
Transition frequency	f_T	$I_C = 10\mu\text{A}_{\text{dc}}, V_{CE} = 5\text{V}_{\text{dc}}, f = 30\text{MHz}$	100		300	MHz

Rating and Characteristic Curves (MMBT5551-HF)

Fig.1 - Static Characteristic


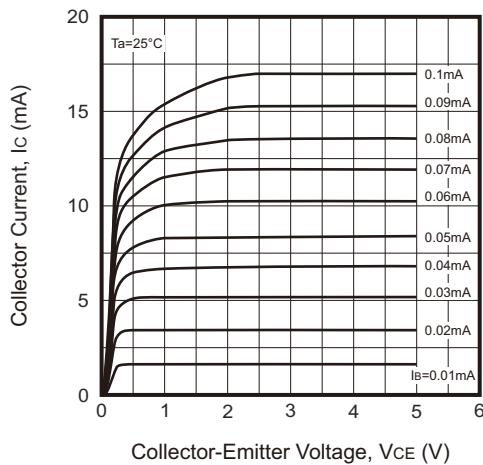


Fig.2 - DC Current Gain

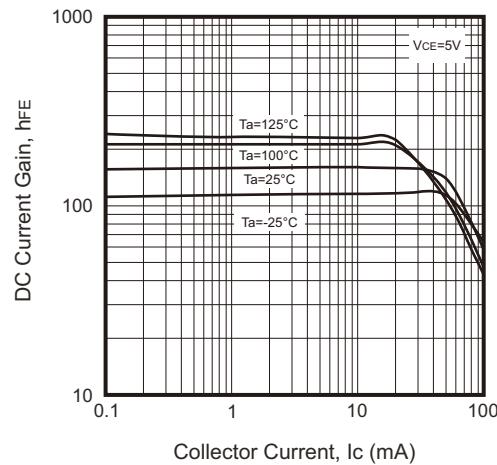

Rating and Characteristic Curves (MMBT5551-HF)

Fig.3 - Collector-Emitter Saturation Voltage

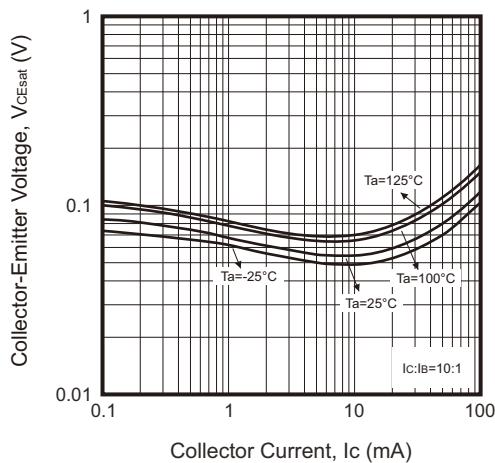


Fig.4 - Base-Emitter Saturation Voltage

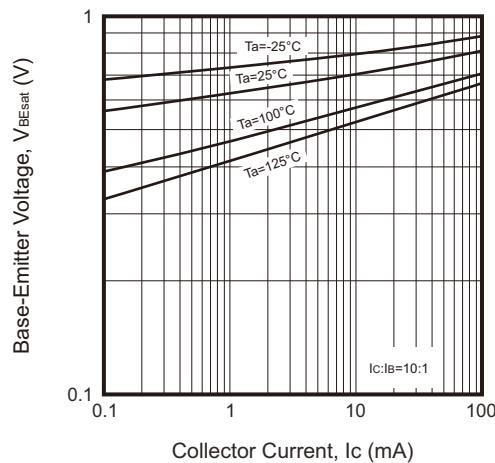


Fig.5 - Base-Emitter on Voltage

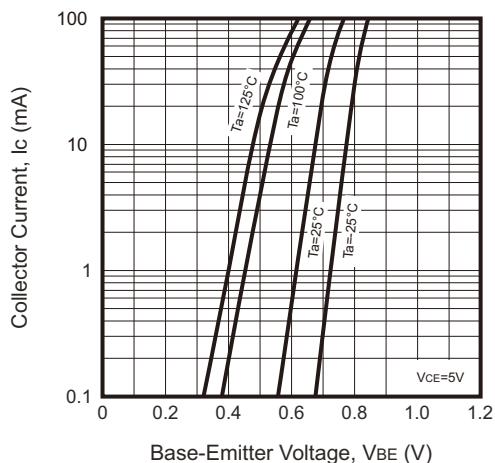


Fig.6 - $C_{ob}/C_{ib} — V_{CB}/V_{EB}$






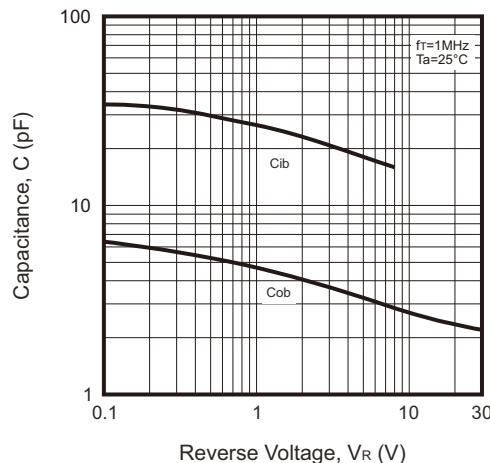


Fig.7 - Collector Power Derating Curve

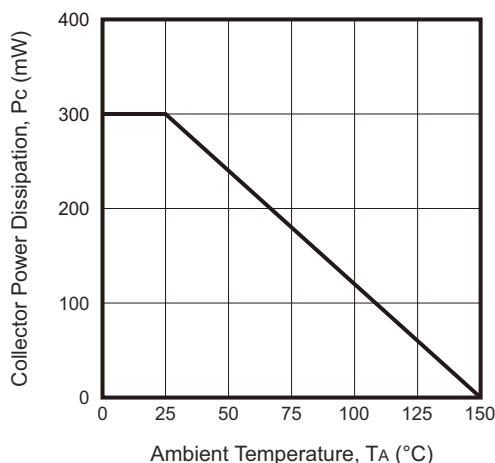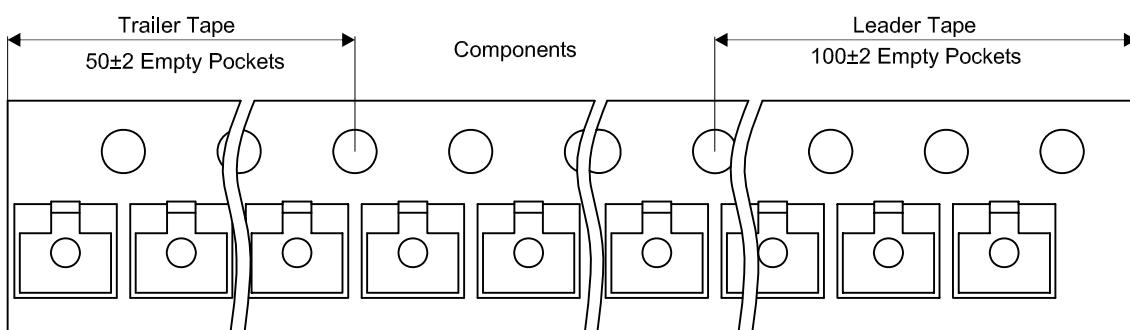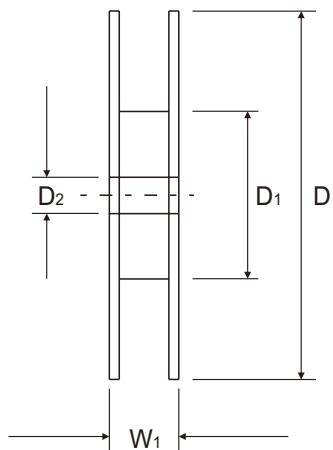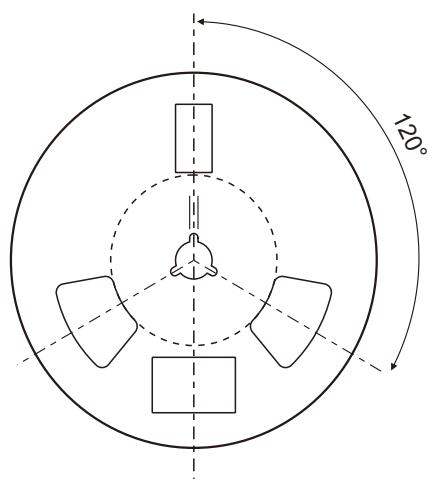

Reel Taping Specification

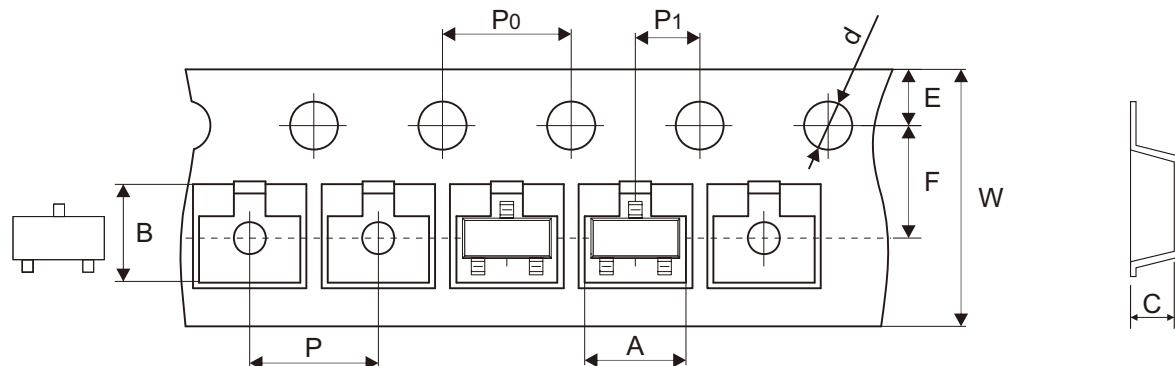

SOT-23	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.15 ± 0.10	2.77 ± 0.10	1.22 ± 0.10	$1.50 + 0.10$ $- 0.00$	178.00 ± 1.00	54.60 ± 1.00	13.30 ± 1.00
	(inch)	0.124 ± 0.004	0.109 ± 0.004	0.048 ± 0.004	$0.059 + 0.004$ $- 0.000$	7.008 ± 0.039	2.150 ± 0.039	0.524 ± 0.039

SOT-23	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	$8.00 + 0.30$ $- 0.10$	11.10 ± 0.20
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	$0.315 + 0.012$ $- 0.004$	0.437 ± 0.008

Marking Code


Part Number	Marking Code
MMBT5551-HF	G1



Solid dot = Control code

Suggested P.C.B. PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.90	0.035
B	0.80	0.031
C	0.95	0.037
D	2.00	0.079
E	2.90	0.114

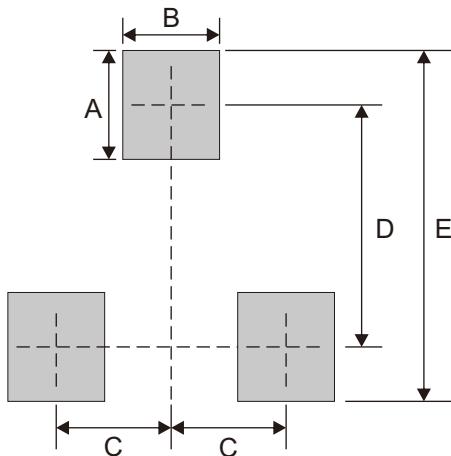

Note: 1. The pad layout is for reference purposes only.

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7