


CMS3400-HF

**N-Channel
RoHS Device
Halogen Free**



Features


- $V_{DS}=30V$, $I_D=5.8A$
 $R_{DS(ON)} < 59m\Omega$ @ $V_{GS}=2.5V$
 $R_{DS(ON)} < 45m\Omega$ @ $V_{GS}=4.5V$
 $R_{DS(ON)} < 41m\Omega$ @ $V_{GS}=10V$
- High power and current handling capability.
- Lead free product is acquired.
- Surface mount package.
- PWM applications.
- Load switch.
- Power management.

Mechanical data

- Case: SOT-23, molded plastic.
- Mounting position: Any.


Description

The CMS3400 uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as 2.5V. This device is suitable for use as a battery protection or in other switching application.

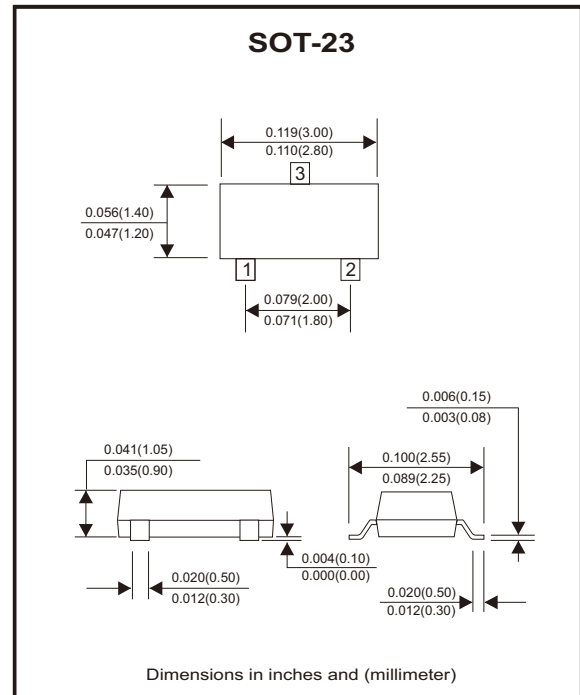

Circuit Diagram

G : Gate
S : Source
D : Drain



Maximum Ratings ($T_a=25^{\circ}C$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-source voltage	V_{DS}	30	V
Gate-source voltage	V_{GS}	± 12	V
Drain current-continuous	I_D	5.8	A
Drain current-pulsed (Note 1)	I_{DM}	30	A
Maximum power dissipation	P_D	1.4	W
Operating junction and storage temperature range	T_J, T_{STG}	-55 to 150	$^{\circ}C$

Thermal Characteristic

Thermal resistance, junction to ambient (Note 2)	$R_{\theta JA}$	89	$^{\circ}C/W$
--	-----------------	----	---------------

Electrical Characteristics (Ta=25°C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Gate-body leakage current	I _{GSS}	V _{GS} = ±12V, V _{DS} = 0V			±100	nA
On Characteristics (Note 3)						
Gate threshold voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	0.7	0.9	1.4	V
Drain-source on-state resistance	R _{DS(ON)}	V _{GS} = 2.5V, I _D = 4A		45	59	mΩ
		V _{GS} = 4.5V, I _D = 5A		31	45	
		V _{GS} = 10V, I _D = 5.8A		28	41	
Forward transconductance	g _{FS}	V _{DS} = 5V, I _D = 5A	10			S
Dynamic Characteristics (Note 4)						
Input capacitance	C _{iss}	V _{DS} = 15V, V _{GS} = 0V, f = 1MHz		820		pF
Output capacitance	C _{oss}			99		
Reverse transfer capacitance	C _{rss}			77		
Switching Characteristics (Note 4)						
Turn-on delay time	t _{d(on)}	V _{DD} = 15V, R _L = 2.7Ω, V _{GS} = 10V, R _{GEN} = 3Ω		3.3		nS
Turn-on rise time	t _r			4.8		
Turn-off delay time	t _{d(off)}			26		
Turn-off fall time	t _f			4		
Total gate charge	Q _g	V _{DS} = 15V, I _D = 5.8A, V _{GS} = 4.5V		9.5		nC
Gate-source charge	Q _{gs}			1.5		
Gate-drain charge	Q _{gd}			3		
Drain-Source Diode Characteristics						
Diode forward voltage (Note 3)	V _{SD}	V _{GS} = 0V, I _S = 5.8A			1.2	V
Diode forward current (Note 2)	I _S				5.8	A

Notes: 1. Repetitive rating: Pulse width limited by maximum junction temperature.

2. Surface mounted on FR4 board, t ≤ 10 sec.

3. Pulse test: Pulse width ≤ 300μs, duty cycle ≤ 2% .

4. Guaranteed by design, not subject to production.

Typical Electrical and Thermal Characteristics (CMS3400-HF)

Fig.1 - Switching Test Circuit

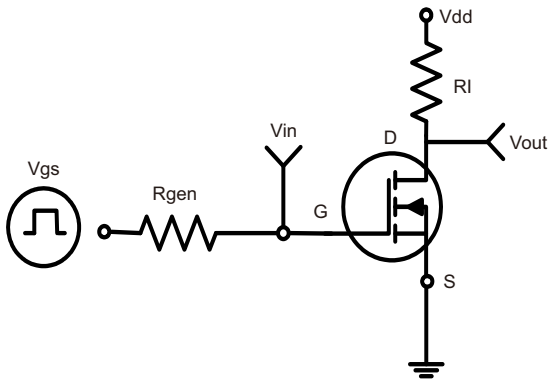


Fig.2 - Switching Waveforms

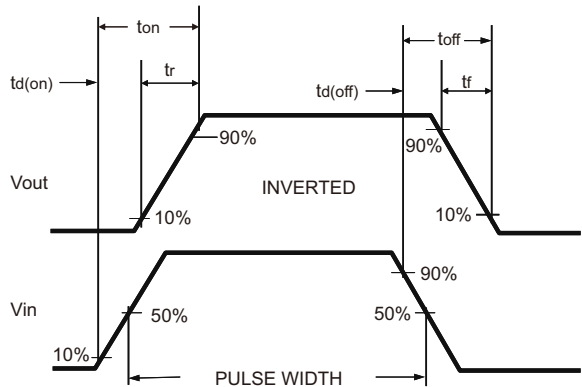


Fig.3 - Power Dissipation

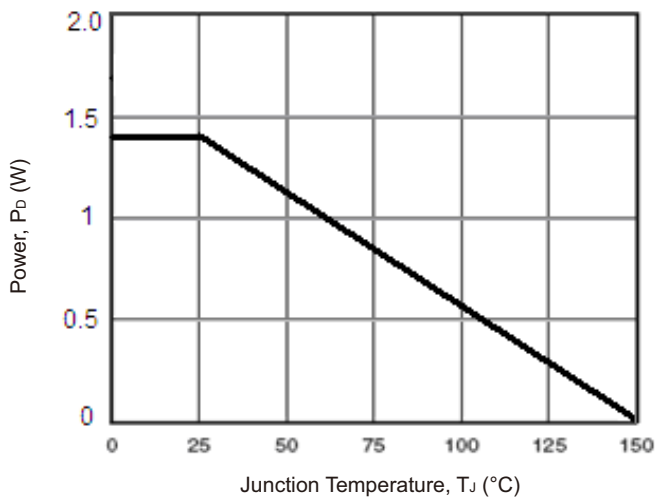


Fig.4 - Drain Current

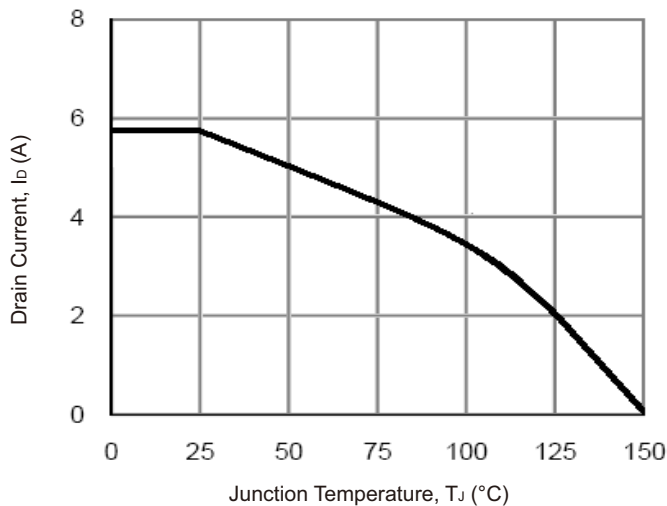


Fig.5 - Output Characteristics


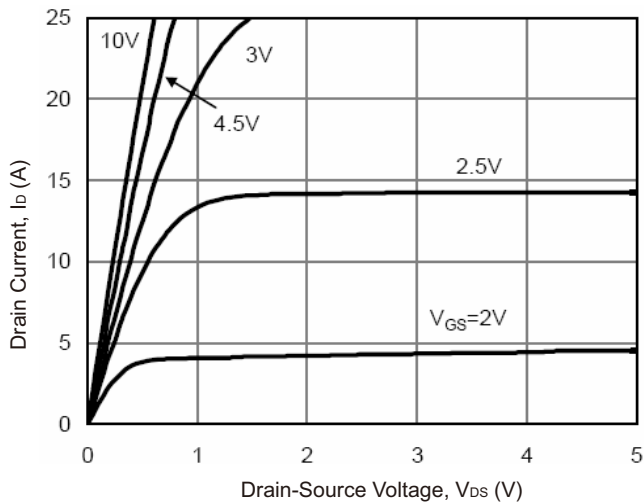


Fig.6 - Drain-Source On-Resistance

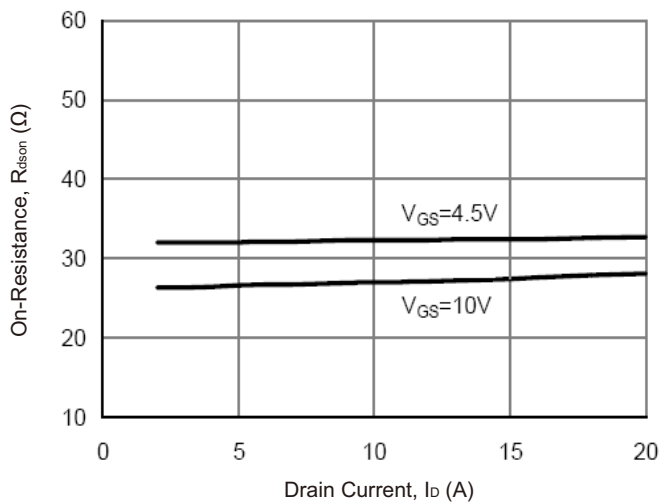

Typical Electrical and Thermal Characteristics (CMS3400-HF)

Fig.7 - Transfer Characteristics

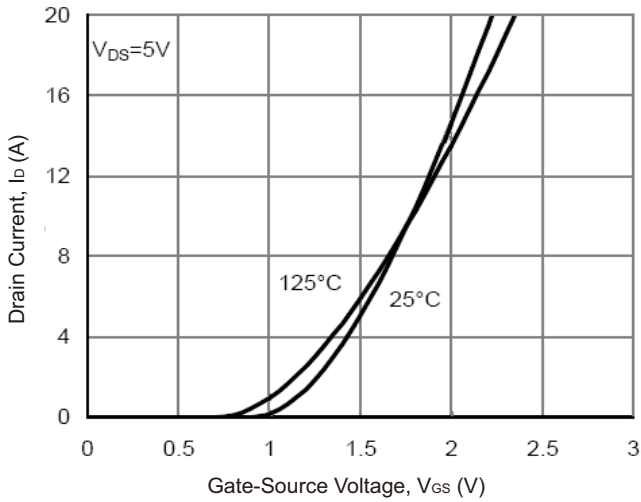


Fig.8 - Drain-Source On-Resistance

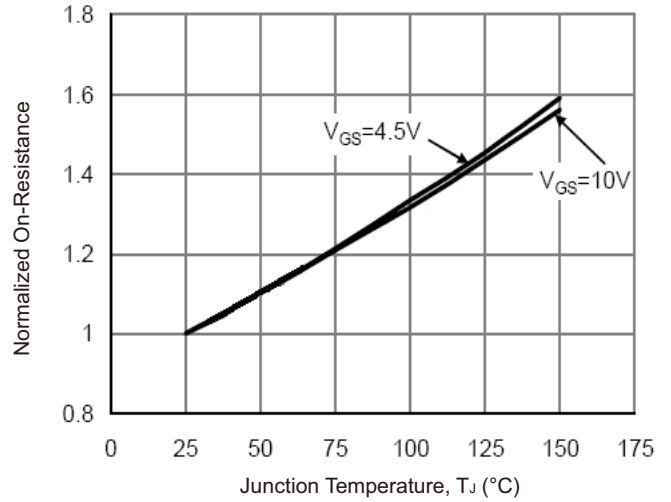


Fig.9 - $R_{DS(ON)}$ vs V_{GS}

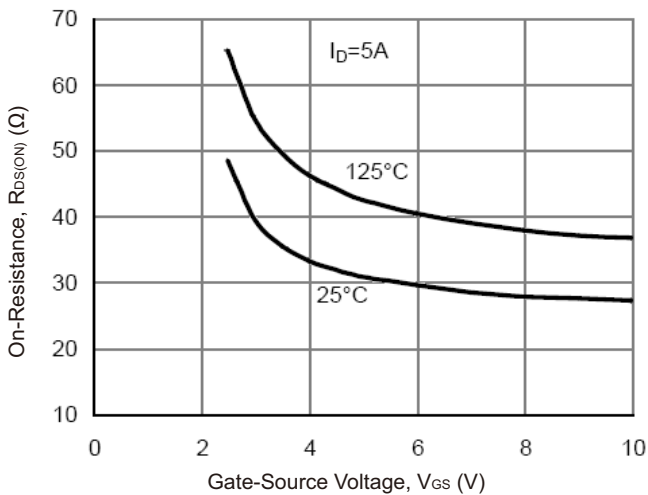


Fig.10 - Capacitance vs V_{DS}

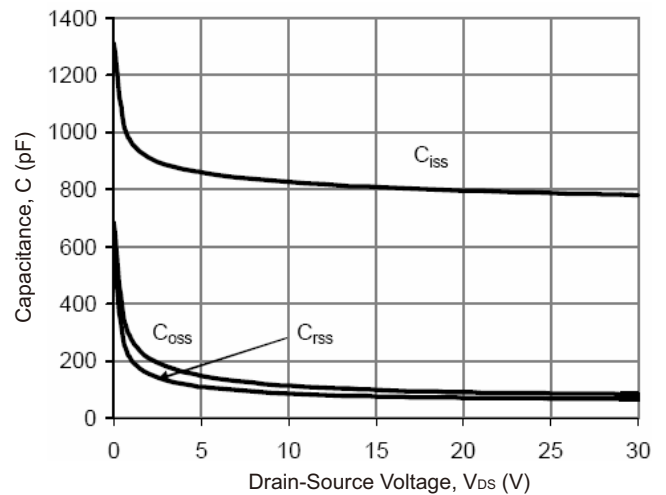


Fig.11 - Gate Charge


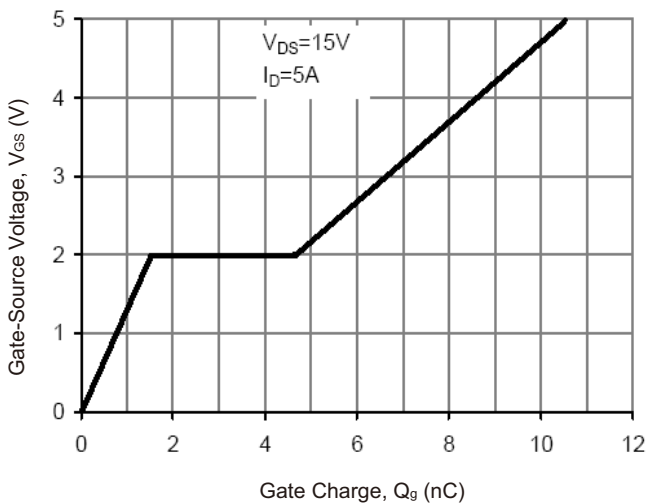


Fig.12 - Source-Drain Diode Forward

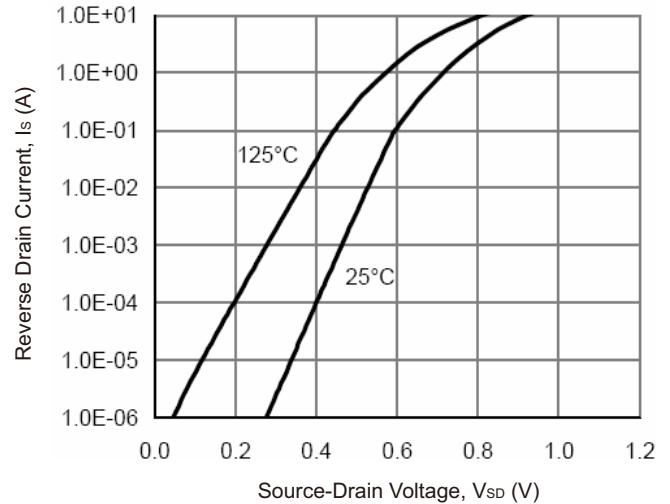

Typical Electrical and Thermal Characteristics (CMS3400-HF)

Fig.13 - Safe Operation Area




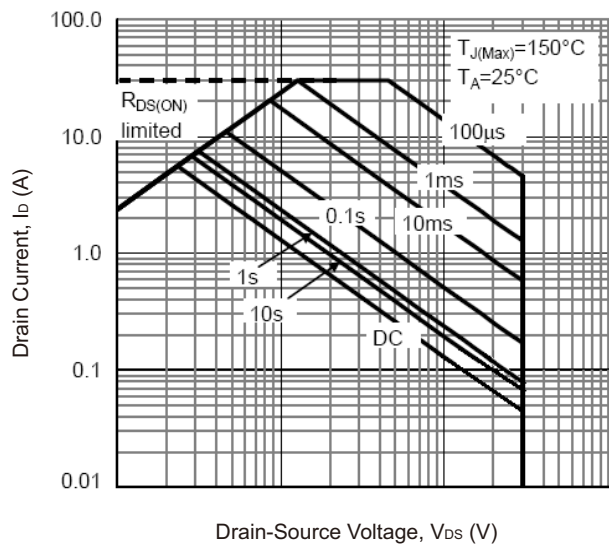


Fig.14 - Normalized Maximum Transient Thermal Impedance

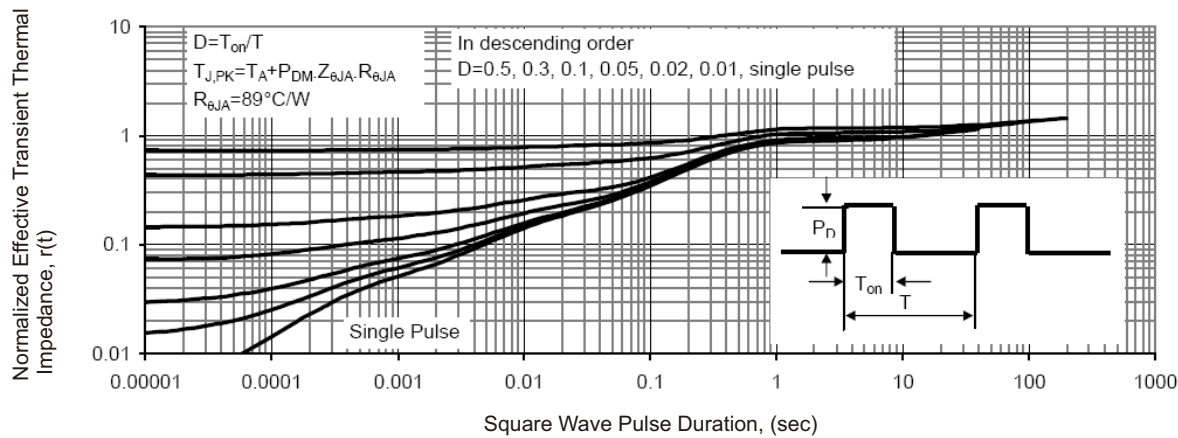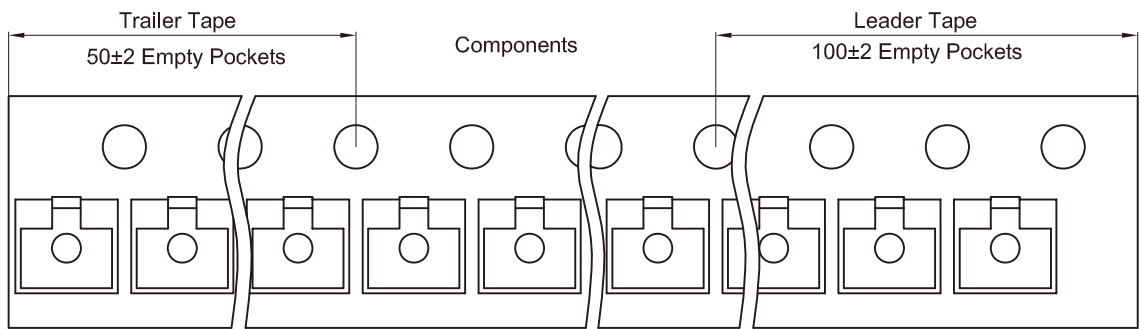

Reel Taping Specification

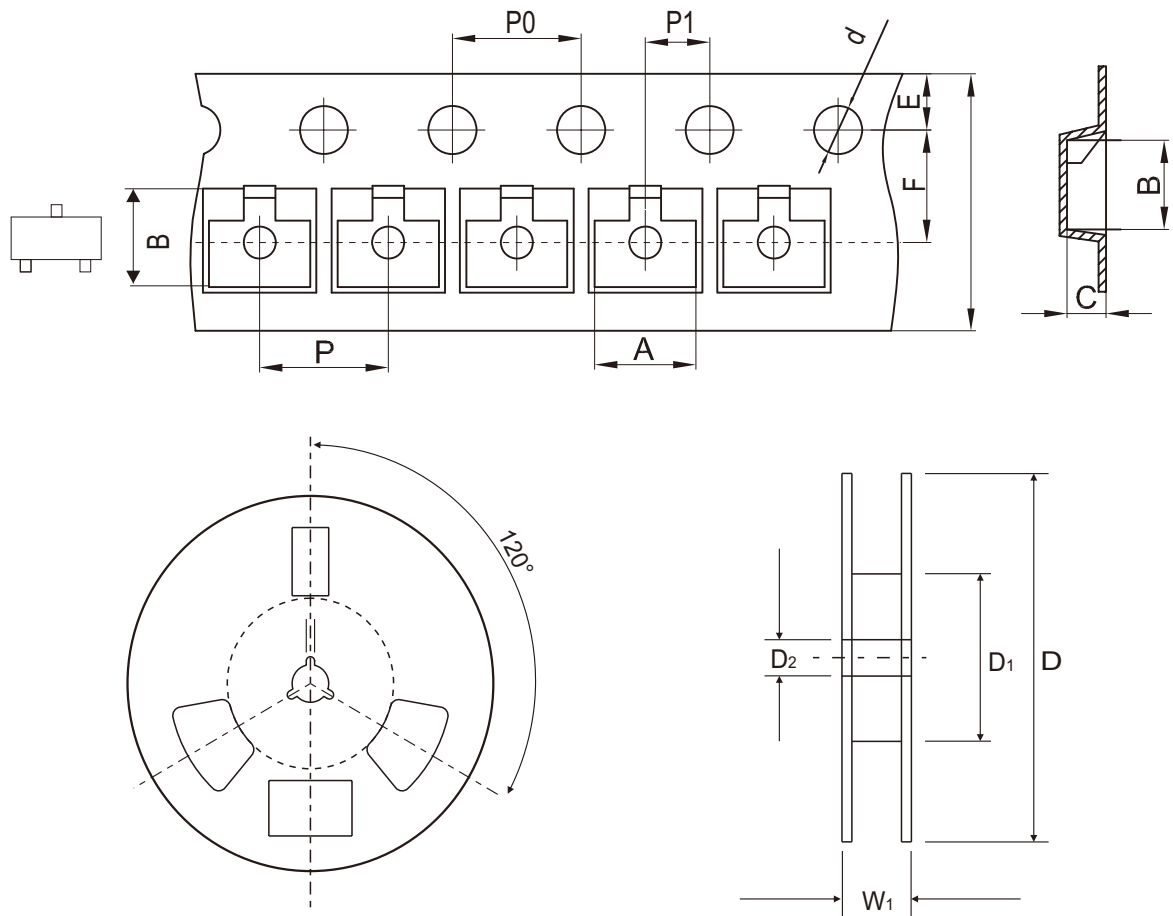


SOT-23	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.15 ± 0.10	2.77 ± 0.10	1.22 ± 0.10	1.50 ± 0.10	178.00 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.124 ± 0.004	0.109 ± 0.004	0.048 ± 0.004	0.059 ± 0.004	7.008 ± 0.079	2.142 ± 0.039	0.512 ± 0.039

SOT-23	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	8.00 + 0.30 / - 0.10	12.30 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.315 + 0.012 / - 0.004	0.484 ± 0.039

Marking Code


Part Number	Marking Code
CMS3400-HF	3400

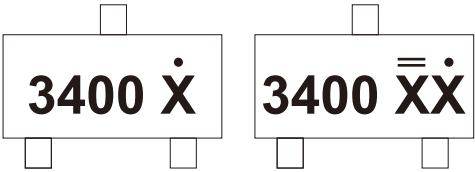

$\dot{X} / \ddot{X}\dot{X}$ = Control code

Suggested P.C.B. PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.80	0.031
B	1.90	0.075
C	2.02	0.080
D	2.82	0.111
E	0.60	0.024

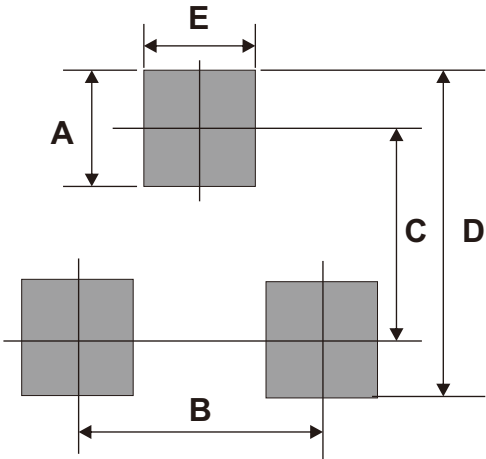

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7