


CMS3404-HF

N-Channel
RoHS Device
Halogen Free



Features


- $V_{DS}=30V$, $I_D=5.8A$.
 $R_{DS(ON)} < 31m\Omega$ @ $V_{GS}=10V$
 $R_{DS(ON)} < 43m\Omega$ @ $V_{GS}=4.5V$
- High power and current handling capability.
- Lead free product is acquired.
- Surface mount package.

Mechanical data


- Case: SOT-23, molded plastic.
- Mounting position: Any.

Description

The CMS3404 uses advanced trench technology to provide excellent $R_{DS(ON)}$ and low gate charge. This device is suitable for use as a load switch and PWM applications.

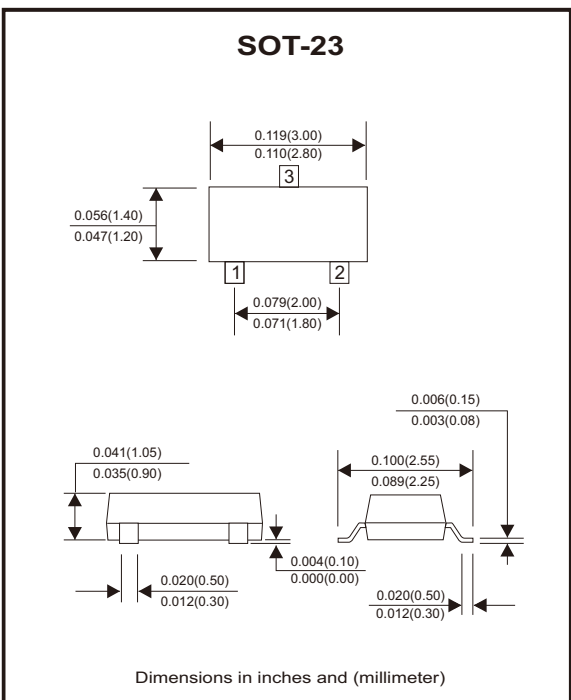

Circuit Diagram



Maximum Ratings ($T_a=25^{\circ}C$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-source voltage	V_{DS}	30	V
Gate-source voltage	V_{GS}	± 20	V
Drain current-continuous	I_D	5.8	A
Drain current-pulsed (Note 1)	I_{DM}	20	A
Maximum power dissipation	P_D	1.4	W
Operating junction and storage temperature range	T_J, T_{STG}	-55 to 150	$^{\circ}C$

Thermal Characteristic

Thermal resistance, junction to ambient (Note 2)	$R_{\theta JA}$	89	$^{\circ}C/W$
--	-----------------	----	---------------

Electrical Characteristics (Ta=25°C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-source breakdown voltage	BV _{DSS}	V _{GS} = 0V, I _D = 250μA	30	33		V
Zero gate voltage drain current	I _{DSS}	V _{DS} = 30V, V _{GS} = 0V			1	μA
Gate-body leakage current	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V			±100	nA
On Characteristics (Note 3)						
Gate threshold voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	1.2	1.6	2.4	V
Drain-source on-state resistance	R _{DS(ON)}	V _{GS} = 10V, I _D = 5A		25.5	31	mΩ
		V _{GS} = 4.5V, I _D = 4A		36	43	
Forward transconductance	g _{FS}	V _{DS} = 5V, I _D = 5A		15		S
Dynamic Characteristics (Note 4)						
Input capacitance	C _{iss}	V _{DS} = 15V, V _{GS} = 0, f = 1MHz		255		pF
Output capacitance	C _{oss}			45		
Reverse transfer capacitance	C _{rss}			35		
Switching Characteristics (Note 4)						
Turn-on delay time	t _{d(on)}	V _{DD} = 15V, R _L = 3Ω, V _{GS} = 10V, R _{GEN} = 3Ω		4.5		nS
Turn-on rise time	t _r			2.5		
Turn-off delay time	t _{d(off)}			14.5		
Turn-off fall time	t _f			3.5		
Total gate charge	Q _g	V _{DS} = 15V, I _D = 5A, V _{GS} = 10V		5.2		nC
Gate-source charge	Q _{gs}			0.85		
Gate-drain charge	Q _{gd}			1.3		
Drain-Source Diode Characteristics						
Diode forward voltage (Note 3)	V _{SD}	V _{GS} = 0V, I _S = 5A			1.2	V
Diode forward current (Note 2)	I _S				5	A

Notes: 1. Repetitive rating: Pulse width limited by maximum junction temperature.

2. Surface mounted on FR4 board, t ≤ 10 sec.

3. Pulse test: Pulse width ≤ 300μs, duty cycle ≤ 2% .

4. Guaranteed by design, not subject to production.

Typical Electrical and Thermal Characteristics (CMS3404-HF)

Fig.1 - Switching Test Circuit

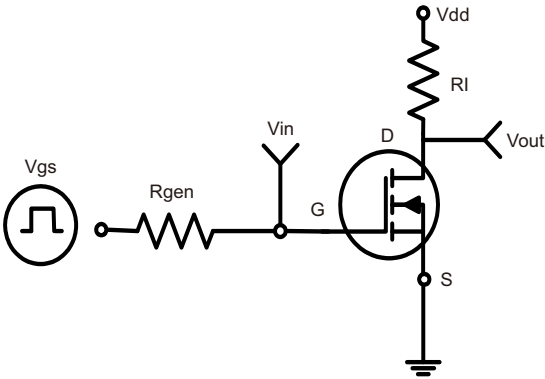


Fig.2 - Switching Waveforms

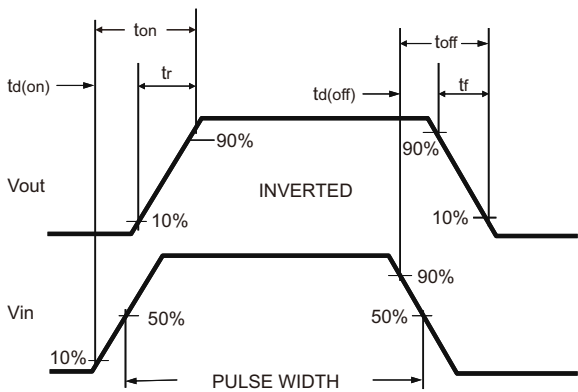


Fig.3 - Output Characteristics

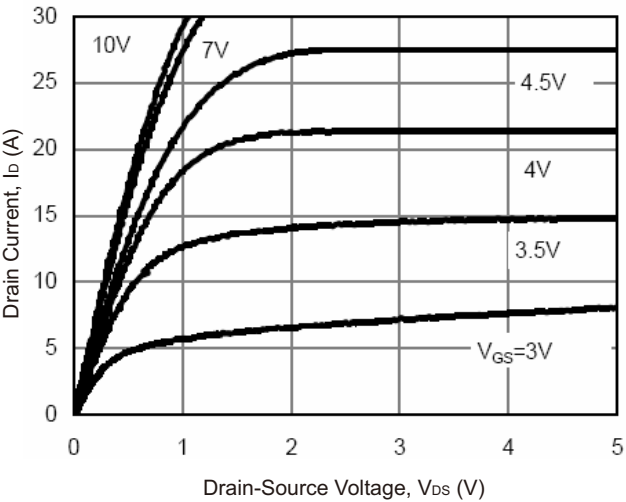


Fig.4 - Transfer Characteristics

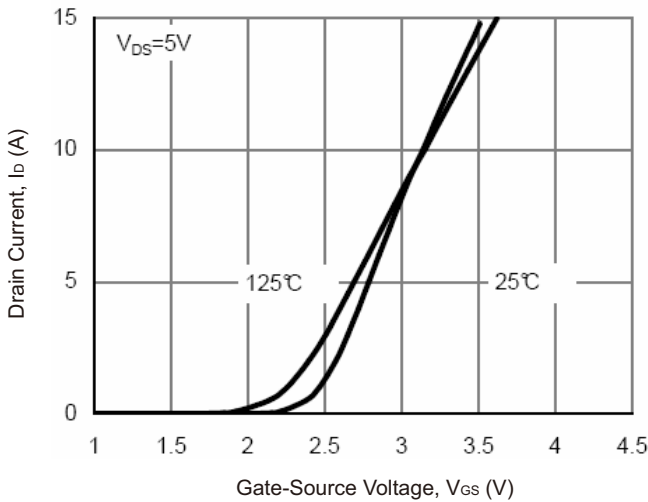


Fig.5 - Drain-Source On-Resistance


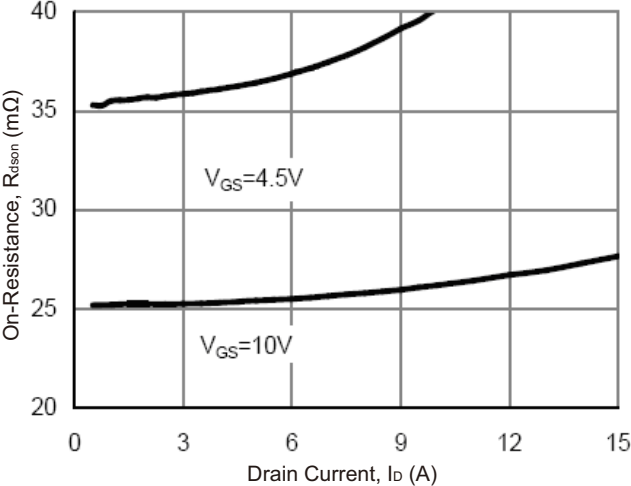


Fig.6 - Drain-Source On-Resistance

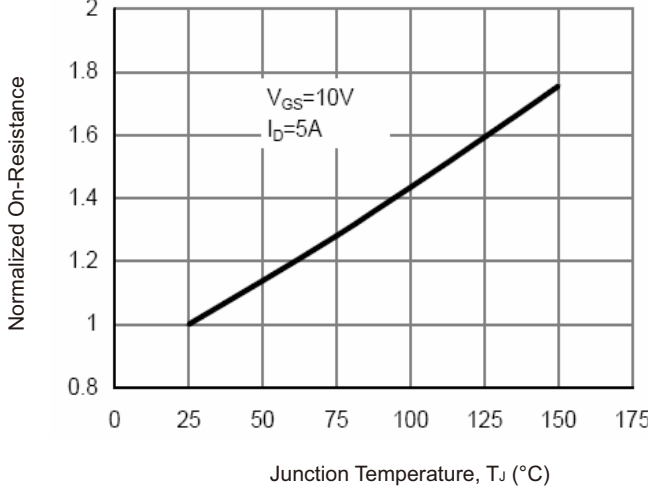

Typical Electrical and Thermal Characteristics (CMS3404-HF)

Fig.7 - $R_{DS(ON)}$ vs V_{GS}

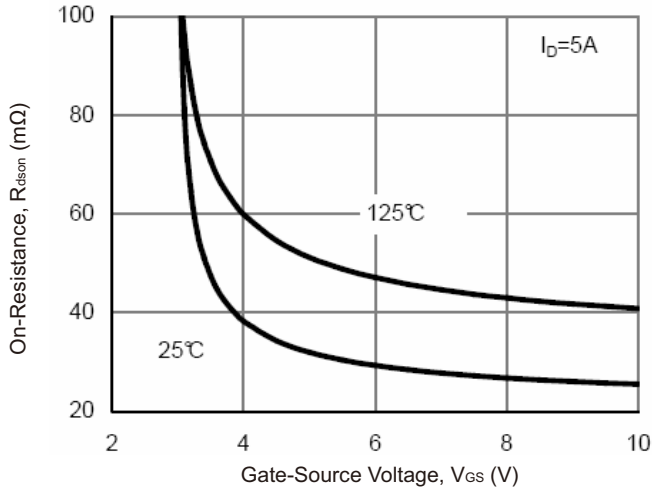


Fig.8 - Power Dissipation

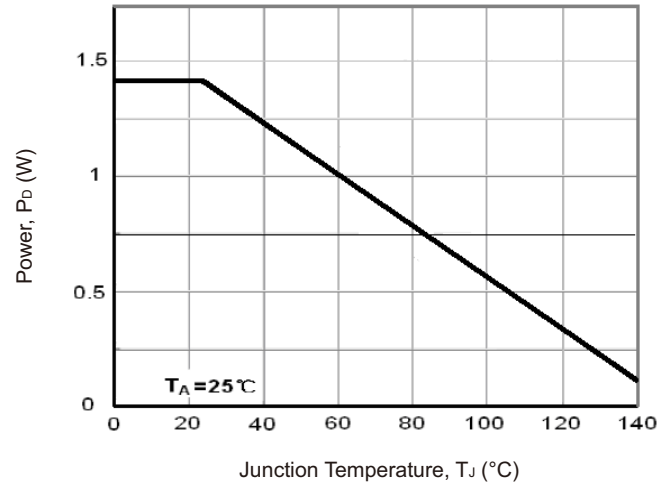


Fig.9 - Gate Charge

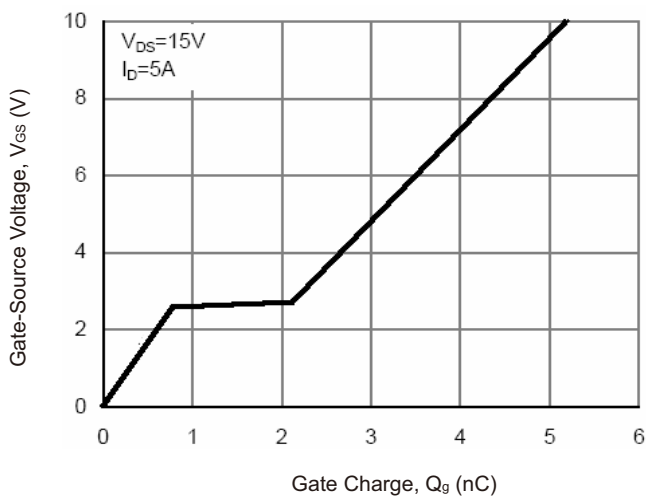


Fig.10 - Source-Drain Diode Forward

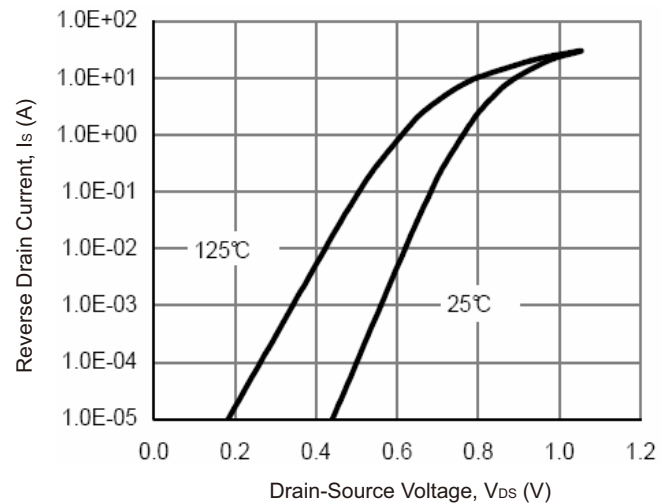


Fig.11 - Capacitance vs V_{DS}



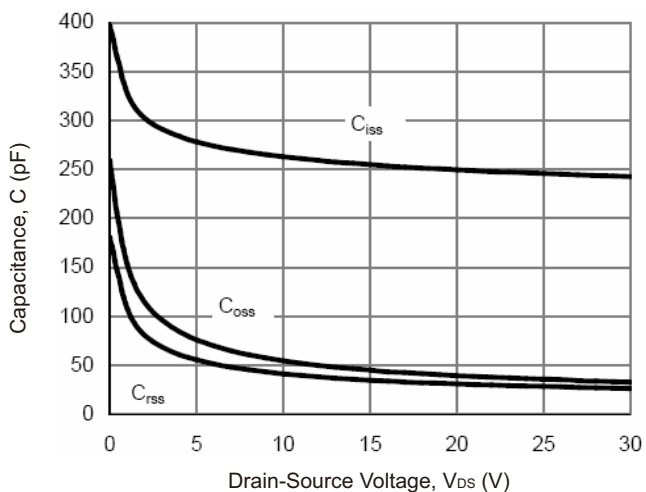


Fig.12 - Safe Operation Area


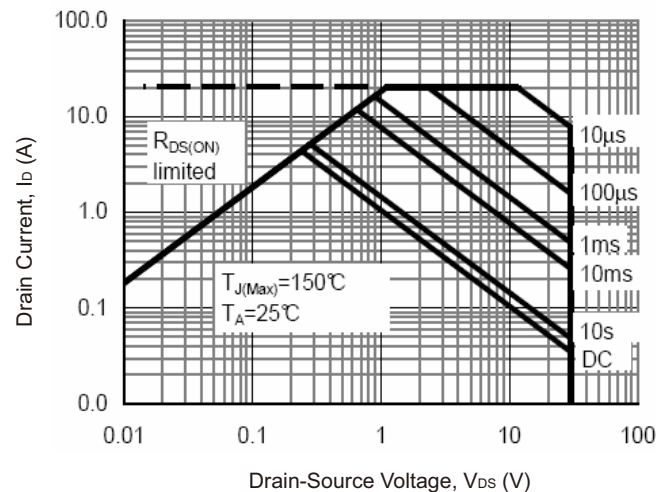


Typical Electrical and Thermal Characteristics (CMS3404-HF)

Fig.13 - Normalized Maximum Transient Thermal Impedance

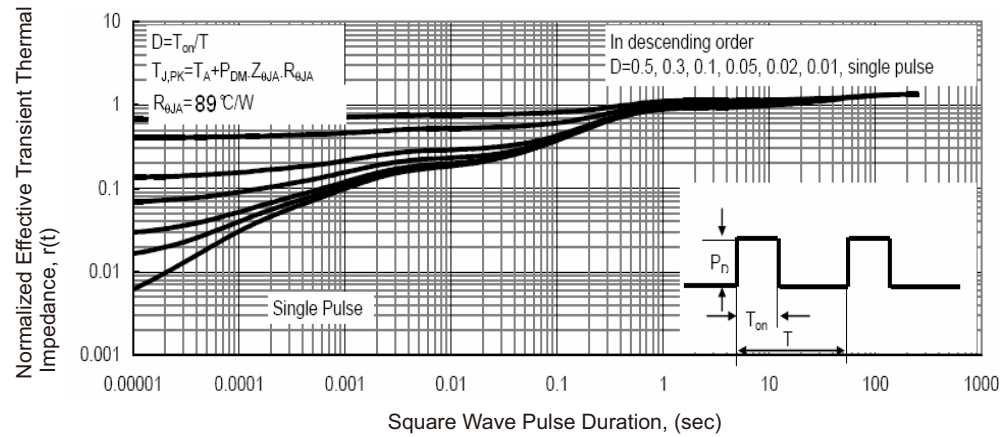

Reel Taping Specification

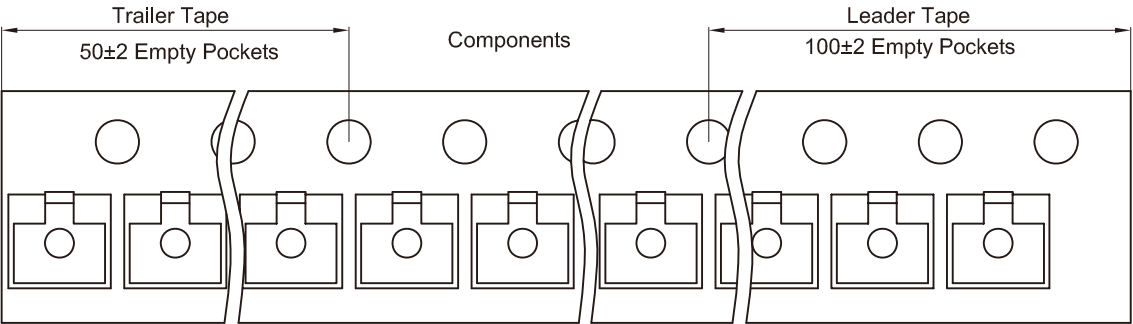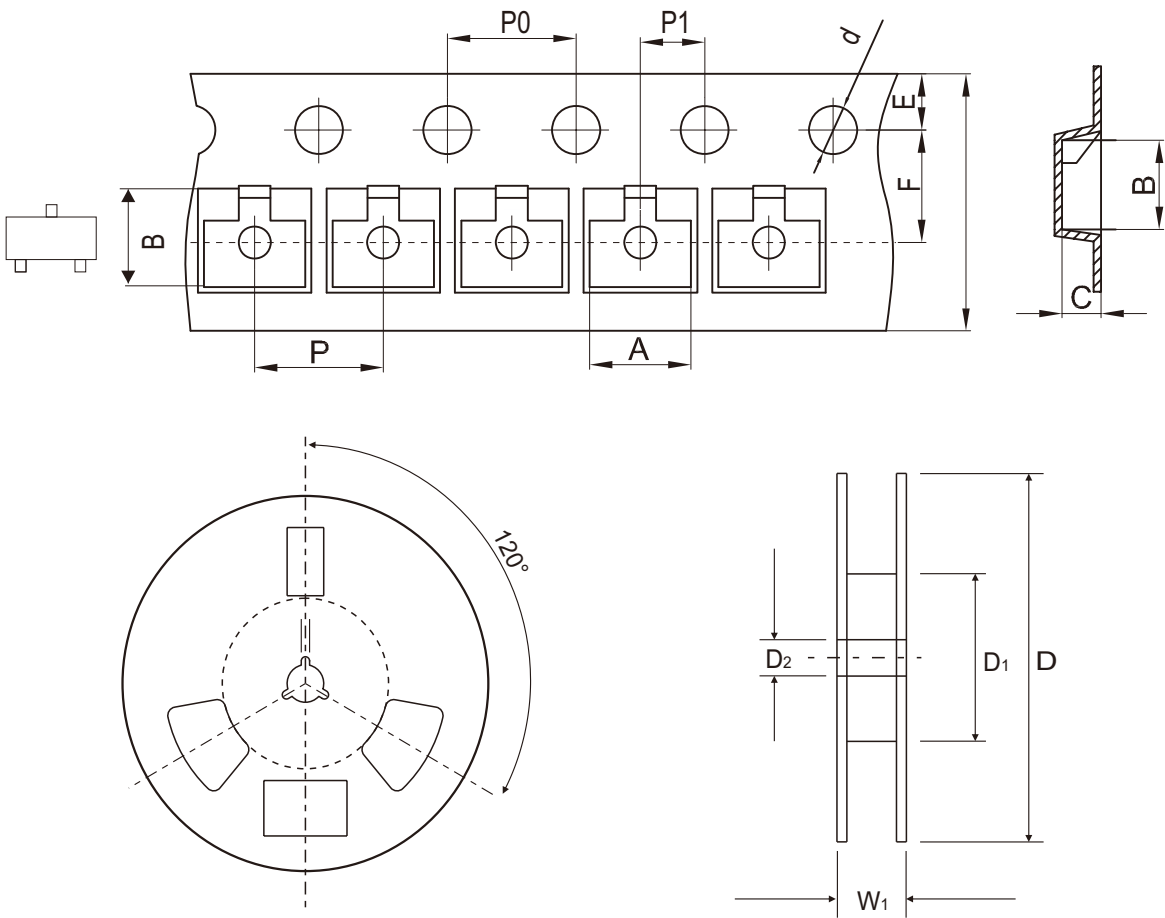


SOT-23	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.15 ± 0.10	2.77 ± 0.10	1.22 ± 0.10	1.50 ± 0.10	178.00 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.124 ± 0.004	0.109 ± 0.004	0.048 ± 0.004	0.059 ± 0.004	7.008 ± 0.079	2.142 ± 0.039	0.512 ± 0.039

SOT-23	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	8.00 + 0.30 / - 0.10	12.30 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.315 + 0.012 / - 0.004	0.484 ± 0.039

Marking Code


Part Number	Marking Code
CMS3404-HF	3404

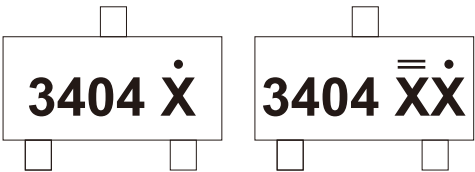

$\dot{X} / \ddot{X}\dot{X}$ = Control code

Suggested P.C.B. PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.80	0.031
B	1.90	0.075
C	2.02	0.080
D	2.82	0.111
E	0.60	0.024

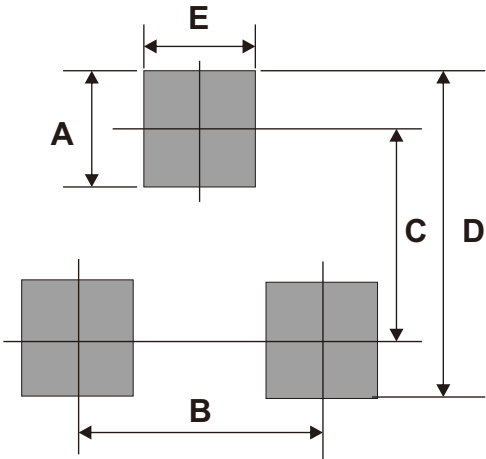

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7