

UF3001-G Thru. UF3008-G

Voltage: 50 to 1000 V

Current: 3.0 A


RoHS Device

Features

- Low cost construction.
- Ultra fast switching for high efficiency.
- Low reverse leakage current.
- High forward voltage drop.
- High current capability.
- The plastic material carries UL recognition 94V-0

Mechanical data

- Case: JEDEC DO-27 molded plastic .
- Polarity: Color band denotes cathode.
- Lead: Plated axial lead, solderable per MIL-STD-202E, method 208C
- Mounting position: Any
- Weight: 1.1 grams(approx.).

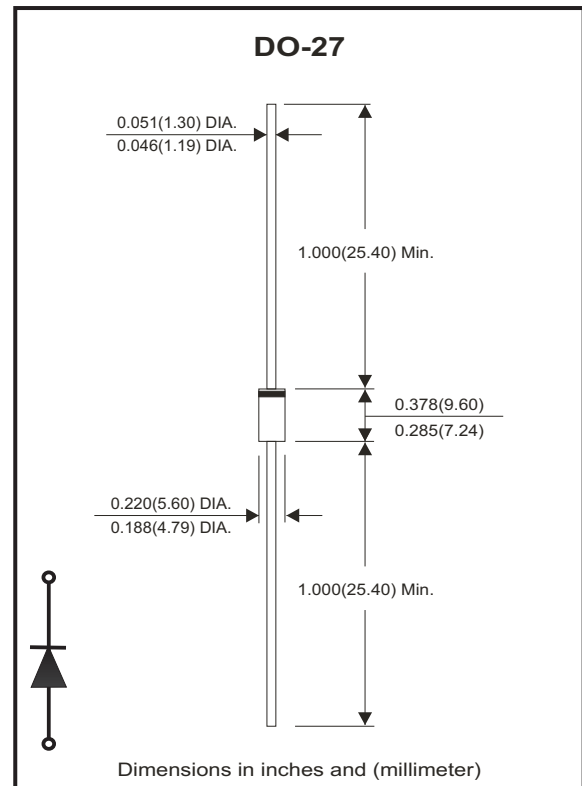

Electrical Characteristics (at TA=25°C unless otherwise noted)

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load derate current by 20%.

Parameter		Symbol	UF3001 -G	UF3002 -G	UF3003 -G	UF3004 -G	UF3005 -G	UF3006 -G	UF3007 -G	UF3008 -G	Unit
		Marking	UF3001	UF3002	UF3003	UF3004	UF3005	UF3006	UF3007	UF3008	
Maximum repetitive peak reverse voltage		V _{RRM}	50	100	200	300	400	600	800	1000	V
Maximum RMS voltage		V _{RMS}	35	70	140	210	280	420	560	700	V
Maximum DC blocking voltage		V _{DC}	50	100	200	300	400	600	800	1000	V
Maximum average forward rectified current 0.375"(9.5mm) lead length @T _A =55		I _{AV}	3.0								A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method)		I _{FSM}	150								A
Peak forward voltage at 3.0A DC		V _F	1.0			1.3		1.7			V
Maximum reverse current at rated DC blocking voltage	T _J =25°C	I _R	5.0								μA
	T _J =100°C	I _R	100								μA
Maximum reverse recovery time (Note 1)		t _{rr}	50					75			nS
Typical junction capacitance (Note 2)		C _J	50					30			PF
Typical thermal resistance (Note 3)		R _{θJA}	20								°C/W
Operating temperature range		T _J	-55 ~ +150								°C
Storage temperature range		T _{STG}	-55 ~ +150								°C

NOTES:

1. Measured with $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$
2. Measured at 1.0MHz and applied reverse voltage of 4.0Volts.
3. Thermal resistance junction to ambient.

Company reserves the right to improve product design , functions and reliability without notice.

REV:B

Rating and Characteristic Curves (UF3001-G Thru. UF3008-G)

Fig.1 - Forward Current Derating Curve

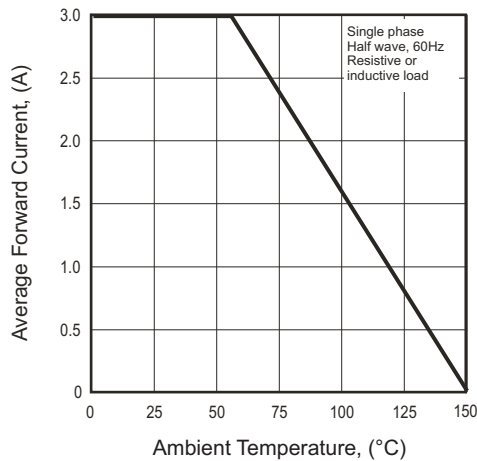


Fig.2 - Maximum Non-Repetitive Surge Current

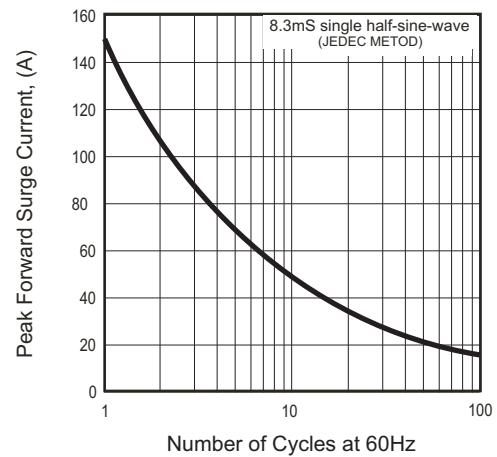


Fig.3 - Typical Junction Capacitance



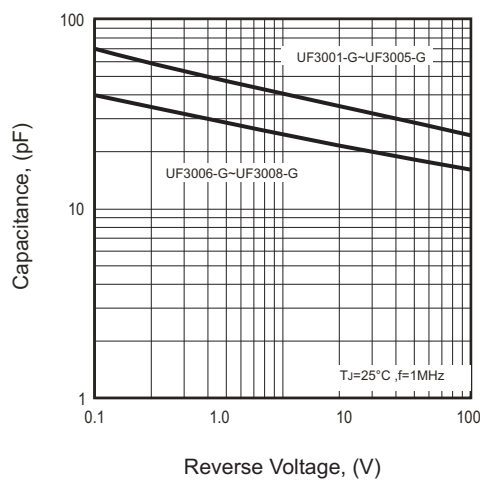


Fig.4 - Typical Forward Characteristics

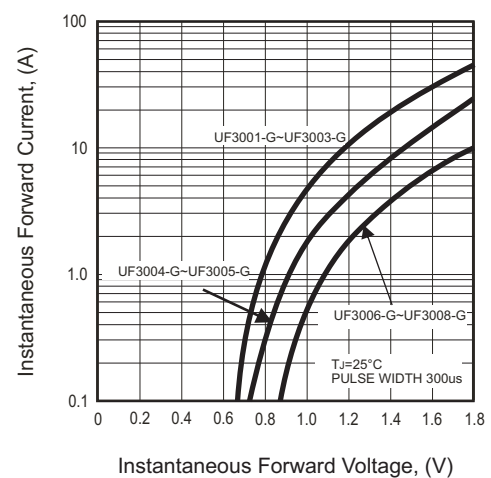

Taping Specification For Axial Lead Diodes

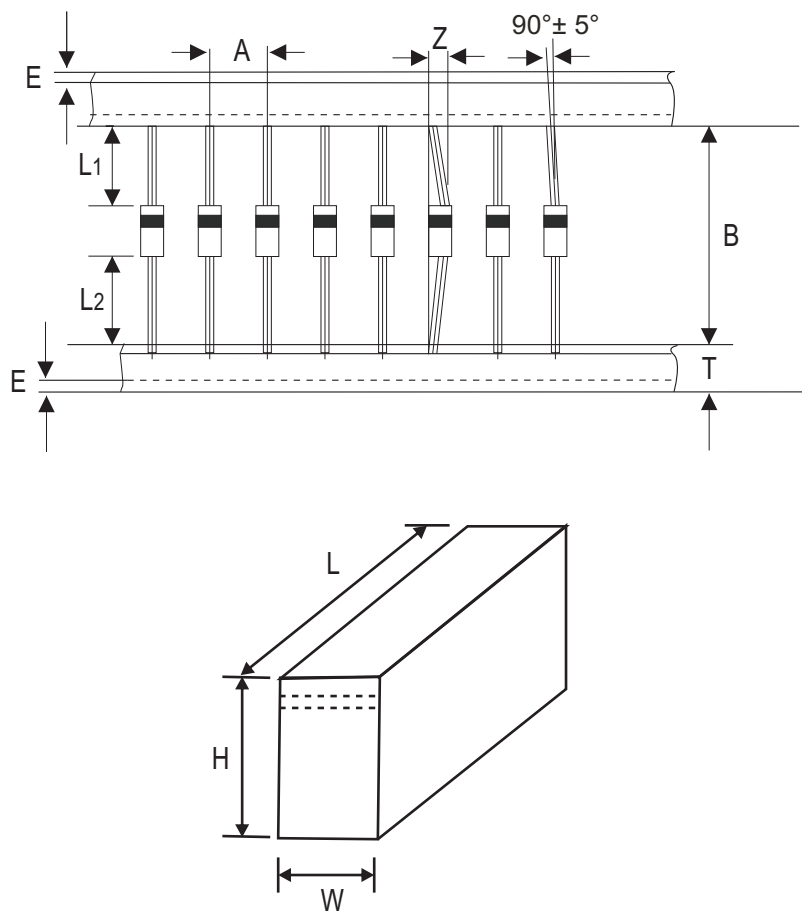

DO-27	SYMBOL	A	B	Z	T	E	L1-L2
	(mm)	10.00 ± 0.50	52.40 ± 1.50	1.60(max)	6.00 ± 0.40	3.00(max)	1.00(max)
	(inch)	0.394 ± 0.020	2.063 ± 0.059	0.063(max)	0.236 ± 0.016	0.118(max)	0.039(max)

DO-27	SYMBOL	Box Length	Box Width	Box height
	(mm)	255 ± 5.00	78 ± 5.00	95 ± 5.00
	(inch)	10.039 ± 0.197	3.071 ± 0.197	3.740 ± 0.197

Standard Packaging

Case Type	AMMO PACK	
	BOX (pcs)	CARTON (pcs)
DO-27	1,200	12,000