


ACDBT-54-HF Series


Reverse Voltage: 30 V
Forward Current: 200 mA
RoHS Device
Halogen free


Features


- Fast switching.
- Low turn-on voltage.
- PN junction guard ring for transient and ESD protection.
- AEC-Q101 Qualified.

Mechanical data

- Case: SOT-23, molded plastic.
- Terminal: Solderable per MIL-STD-750, method 2026.
- Mounting position: Any.

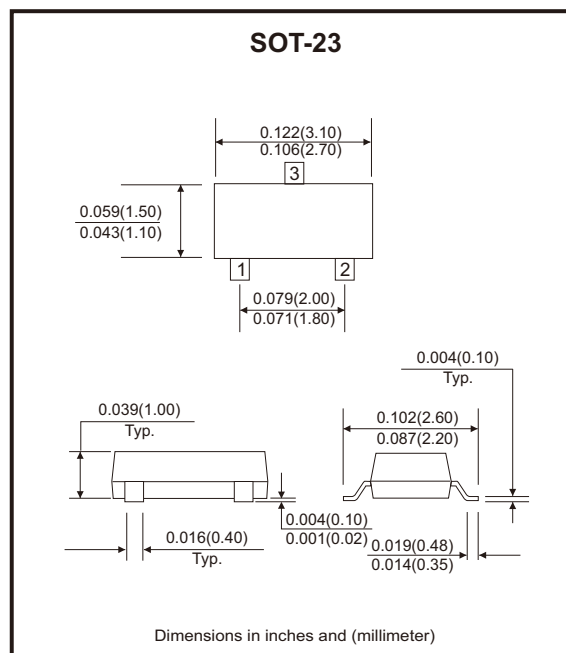

Circuit diagram

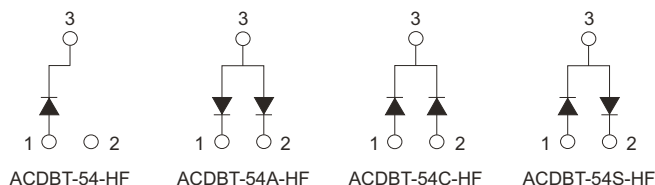

Maximum Ratings (at $T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Conditions	Value	Unit
Peak repetitive peak reverse voltage	V_{RRM}		30	V
Working peak reverse voltage	V_{RWM}			
DC blocking voltage	V_R			
Forward continuous current	I_O		200	mA
Repetitive peak forward current	I_{FRM}		300	mA
Forward surge current	I_{FSM}	@ $t < 1.0s$	600	mA
Power dissipation	P_D		200	mW
Thermal resistance	$R_{\theta JA}$	Junction to ambient air	500	$^{\circ}\text{C/W}$
Operating and storage temperature	T_J, T_{STG}		-55 to +125	$^{\circ}\text{C}$

Electrical Characteristics (at $T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse breakdown voltage	$V_{(BR)}$	$I_R = 100\mu\text{A}$	30			V
Forward voltage	V_F	$I_F = 0.1\text{mA}$ $I_F = 1\text{mA}$ $I_F = 10\text{mA}$ $I_F = 30\text{mA}$ $I_F = 100\text{mA}$			0.24 0.32 0.40 0.50 1.00	V
Reverse current	I_R	$V_R = 25\text{V}$			2	μA
Diode capacitance	C_D	$V_R = 1\text{V}, f = 1.0\text{MHz}$			10	pF
Reverse recovery time	T_{rr}	$I_F = I_R = 10\text{mA}$, $I_{RR} = 0.1X I_R$, $R_L = 100\Omega$			5	nS

Typical Rating and Characteristic Curves (ACDBT-54-HF Series)

Fig.1 - Forward Characteristics

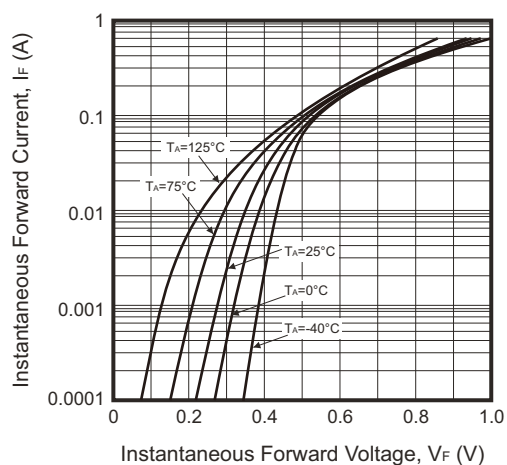


Fig.2 - Typical Reverse Characteristics

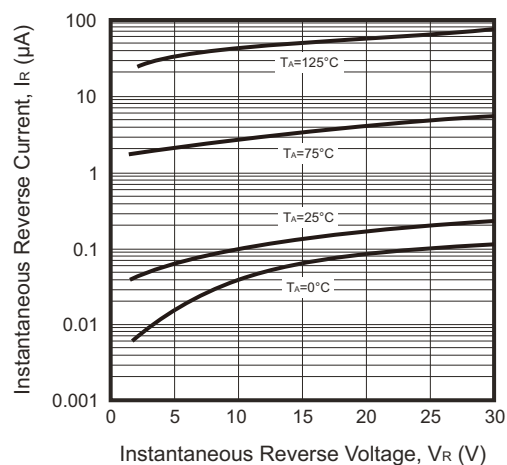


Fig.3 - Typical Capacitance v.s Reverse Voltage




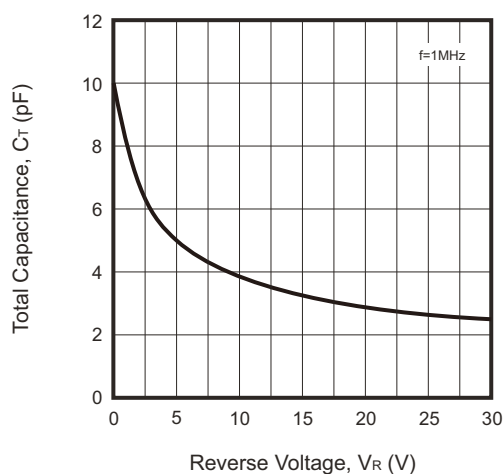


Fig.4 - Power Derating Curve

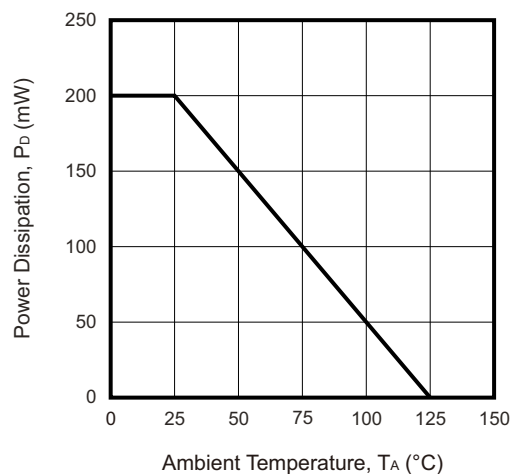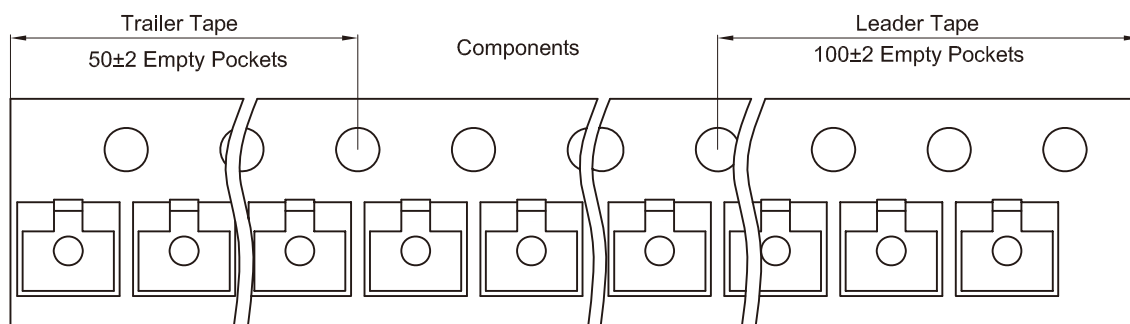

Reel Taping Specification

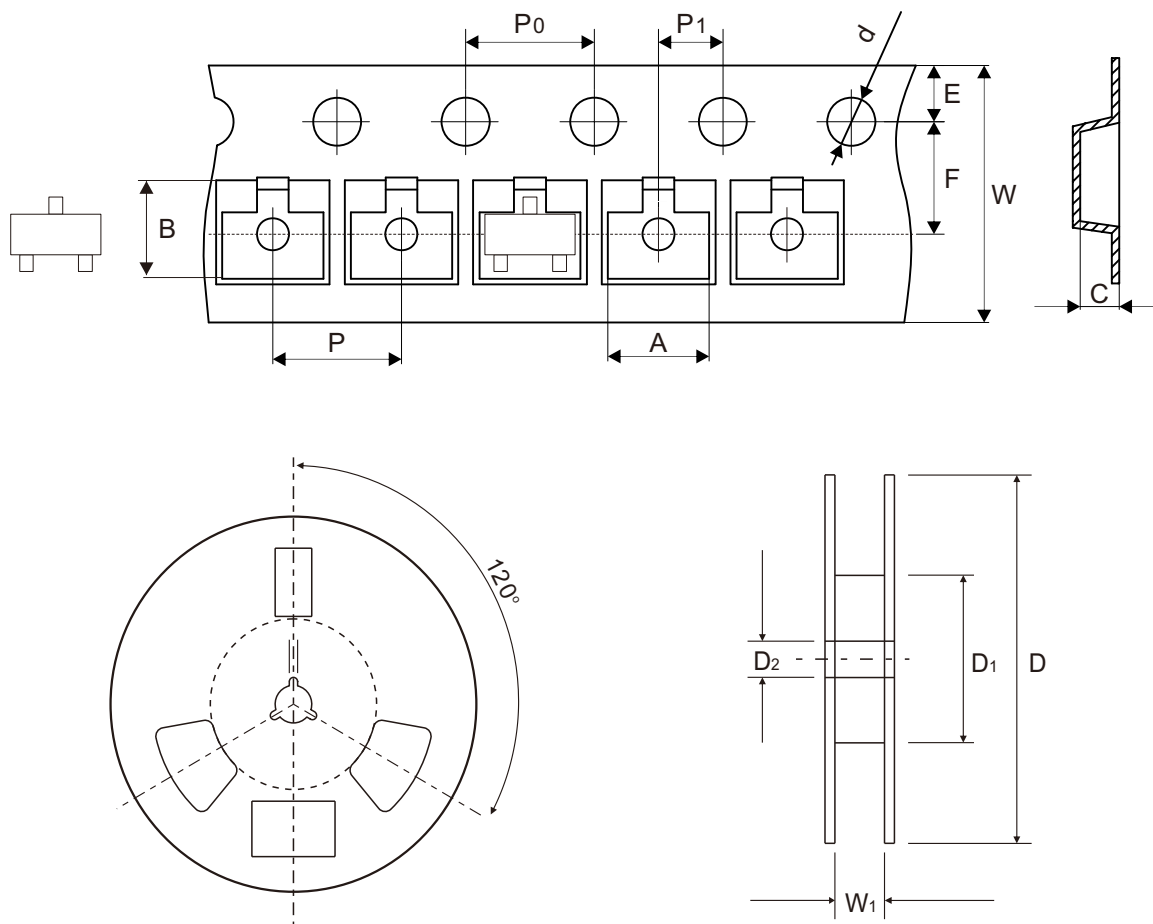


SOT-23	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.15 ± 0.10	2.77 ± 0.10	1.22 ± 0.10	1.50 ± 0.10	178.00 ± 1.00	54.00 ± 0.50	13.00 ± 0.50
	(inch)	0.124 ± 0.004	0.109 ± 0.004	0.048 ± 0.004	0.059 ± 0.004	7.008 ± 0.039	2.126 ± 0.020	0.512 ± 0.020

SOT-23	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	$8.00 \pm 0.30 / - 0.10$	9.50 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.158 ± 0.004	0.158 ± 0.004	0.079 ± 0.002	$0.315 \pm 0.012 / - 0.004$	0.374 ± 0.039

Marking Code


Part Number	Marking Code
ACDBT-54-HF	KL1
ACDBT-54A-HF	KL2
ACDBT-54C-HF	KL3
ACDBT-54S-HF	KL4

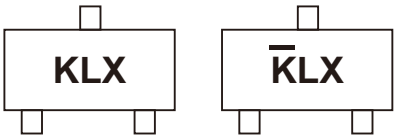

X = Product type marking code

Suggested P.C.B. PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.90	0.035
B	0.80	0.031
C	1.90	0.075
D	2.02	0.080

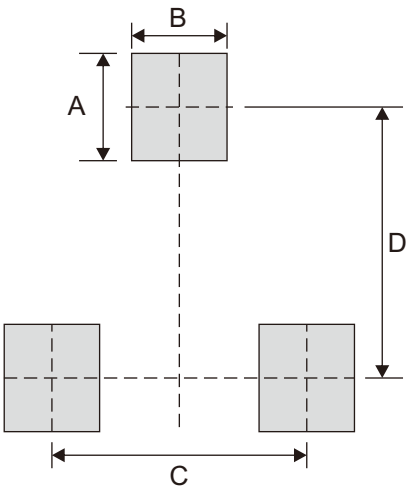

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7