


## AMMST222A-HF (NPN)

RoHS Device  
Halogen Free





### Features

- Epoxy meets UL-94 V-0 flammability rating.
- Moisture sensitivity Level 1.
- High conductance.
- AEC-Q101 Qualified.

### Mechanical data

- Case: SOT-323, molded plastic.
- Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102.

### Circuit Diagram

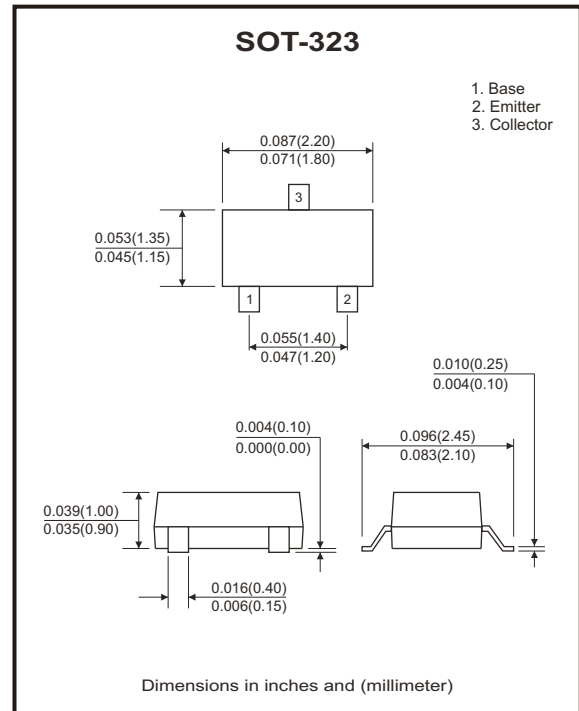

### Maximum Ratings (at Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-base voltage	$V_{CBO}$	75	V
Collector-emitter voltage	$V_{CEO}$	40	V
Emitter-base voltage	$V_{EBO}$	6	V
Collector current-continuous	$I_C$	600	mA
Total device dissipation	$P_D$	200	mW
Thermal resistance junction to ambient	$R_{\theta JA}$	625	K/W
Junction temperature range	$T_J$	-55 ~ +150	°C
Storage temperature range	$T_{STG}$	-55 ~ +150	°C

## Electrical Characteristics (at Ta=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Max	Unit
Collector-base breakdown voltage	$I_C = 10\mu A, I_E = 0$	$V_{(BR)CBO}$	75		V
Collector-emitter breakdown voltage	$I_C = 10mA, I_B = 0$	$V_{(BR)CEO}$	40		V
Emitter-base breakdown voltage	$I_E = 10\mu A, I_C = 0$	$V_{(BR)EBO}$	6		V
Collector cut-off current	$V_{CE} = 60V, V_{BE} = 3V$	$I_{CEX}$		10	nA
Base cut-off current	$V_{CE} = 60V, I_C = 0$	$I_{CBO}$		100	nA
Emitter cut-off current	$V_{EB} = 3V, I_C = 0$	$I_{EBO}$		100	nA
DC current gain	$V_{CE} = 10V, I_C = 0.1mA$	$h_{FE(1)}$	40		
	$V_{CE} = 10V, I_C = 1mA$	$h_{FE(2)}$	50		
	$V_{CE} = 10V, I_C = 10mA$	$h_{FE(3)}$	75		
	$V_{CE} = 10V, I_C = 150mA$	$h_{FE(4)}$	100	300	
	$V_{CE} = 10V, I_C = 500mA$	$h_{FE(5)}$	40		
Collector-emitter saturation voltage	$I_C = 150mA, I_B = 15mA$ $I_C = 500mA, I_B = 50mA$	$V_{CE(sat)}$		0.3 1.0	V
Base-emitter saturation voltage	$I_C = 150mA, I_B = 15mA$ $I_C = 500mA, I_B = 50mA$	$V_{BE(sat)}$	0.6 -	1.2 2.0	V
Transition frequency	$V_{CE} = 20V, I_C = 20mA, f = 100MHz$	$f_T$	250		MHz
Delay time	$V_{CC} = 30V, V_{BE(off)} = -0.5V$	$t_d$		10	ns
Rise time	$I_C = 150mA, I_{B1} = 15mA$	$t_r$		25	ns
Storage time	$V_{CC} = 30V, I_C = 150mA$	$t_s$		225	ns
Fall time	$I_{B1} = I_{B2} = 15mA$	$t_f$		60	ns

## Rating and Characteristic Curves (AMMST2222A-HF)

Fig.1 - Static Characteristic

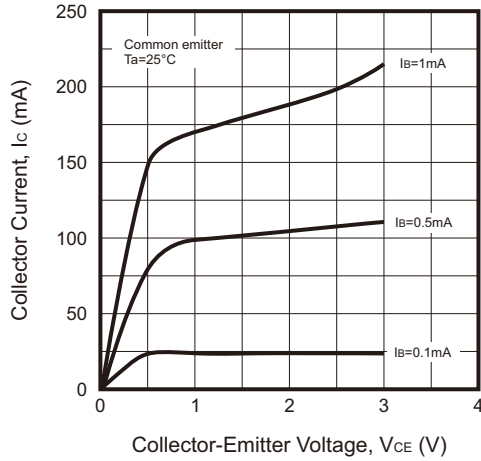


Fig.2 - P<sub>D</sub> — T<sub>A</sub>

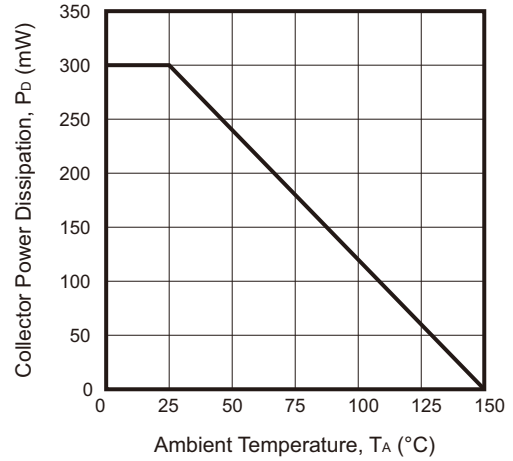


Fig.3 - V<sub>BEsat</sub> — I<sub>c</sub>

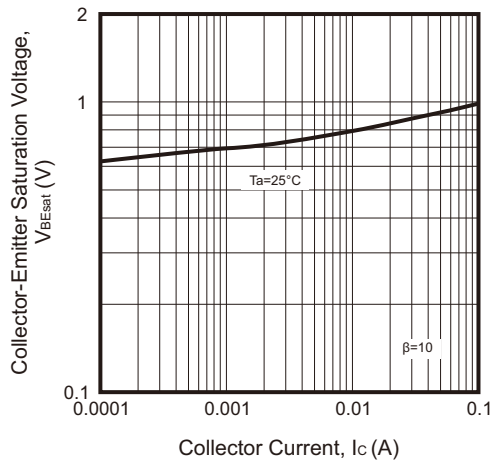


Fig.4 - V<sub>CEsat</sub> — I<sub>c</sub>






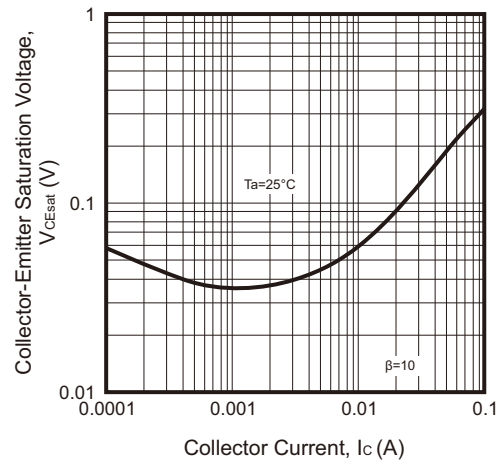


Fig.5 - h<sub>FE</sub> — I<sub>c</sub>

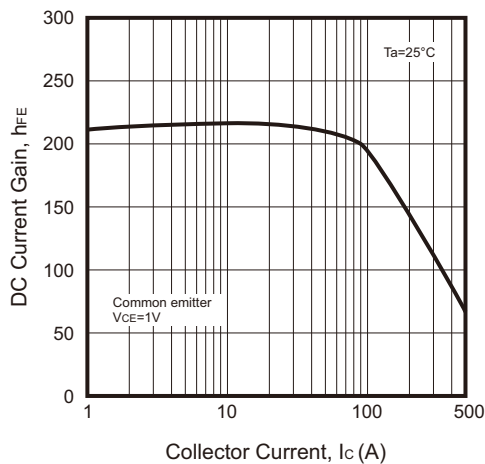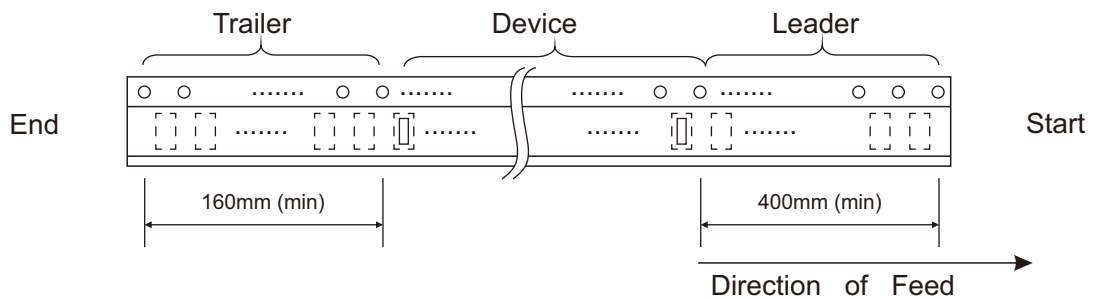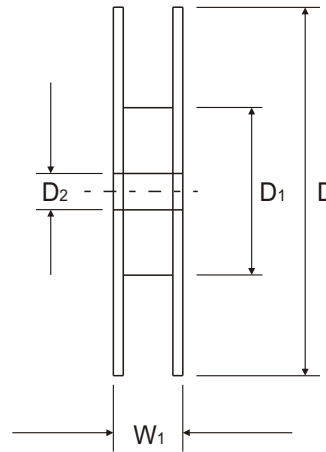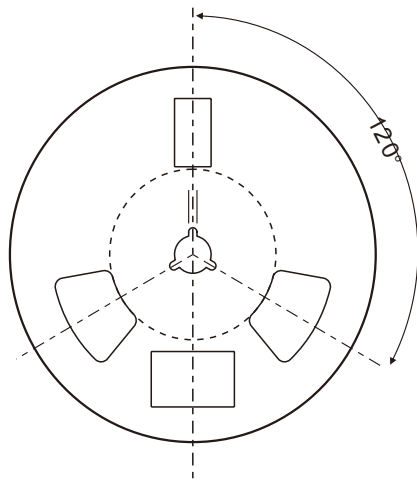

Company reserves the right to improve product design, functions and reliability without notice.

## Reel Taping Specification

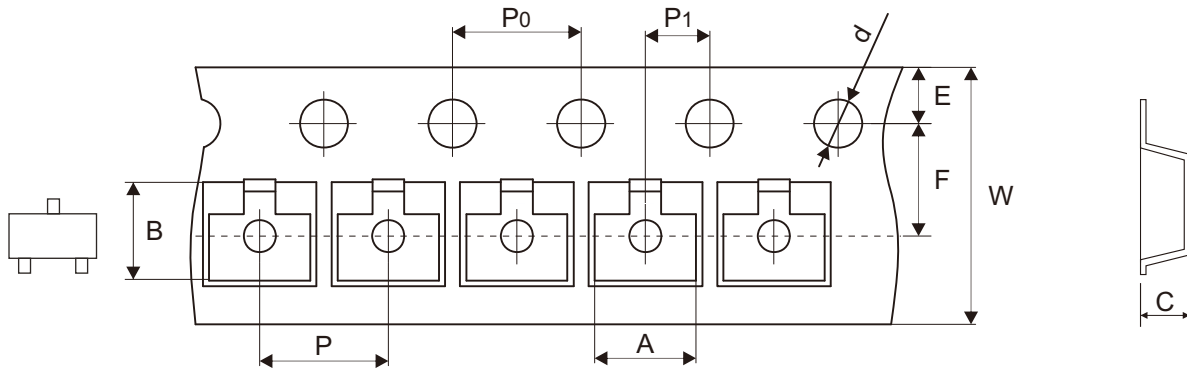

SOT-323	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	2.25 ± 0.10	2.55 ± 0.10	1.19 ± 0.10	1.50 ± 0.10	178.00 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.089 ± 0.004	0.100 ± 0.004	0.047 ± 0.004	0.059 ± 0.004	7.008 ± 0.079	2.142 ± 0.039	0.512 ± 0.039

SOT-323	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	8.00 + 0.30 - 0.10	12.30 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.315 + 0.012 - 0.004	0.484 ± 0.039

Company reserves the right to improve product design, functions and reliability without notice.

REV:A


## Marking Code

Part Number	Marking Code
AMMST2222A-HF	K3P.



## Suggested P.C.B. PAD Layout

SIZE	SOT-323	
	(mm)	(inch)
A	0.70	0.028
B	0.90	0.035
C	0.65	0.026
D	1.90	0.075

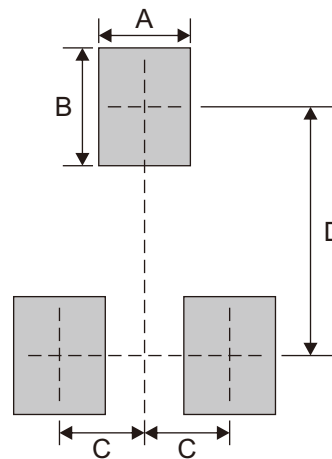

Note: 1. The pad layout is for reference purposes only.

## Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-323	3,000	7