

CPDUT4V8MUAHT-HF

RoHS Device

Halogen Free




Features

- ESD/Surge protection for 1 line with Unidirectional.
- High surge protection.
- Fast turn-on and low clamping voltage.
- IEC 61000-4-2 (ESD) ± 30 kV (air/contact)
- IEC 61000-4-4 (EFT) 80A (5/50ns)
- IEC 61000-4-5 (Lightning) 180A (8/20 μ s)

Mechanical data

- Case: DFN1610-2L package, molded plastic.
- Polarity: Indicated by cathode band.
- Mounting position: Any.

Circuit Diagram

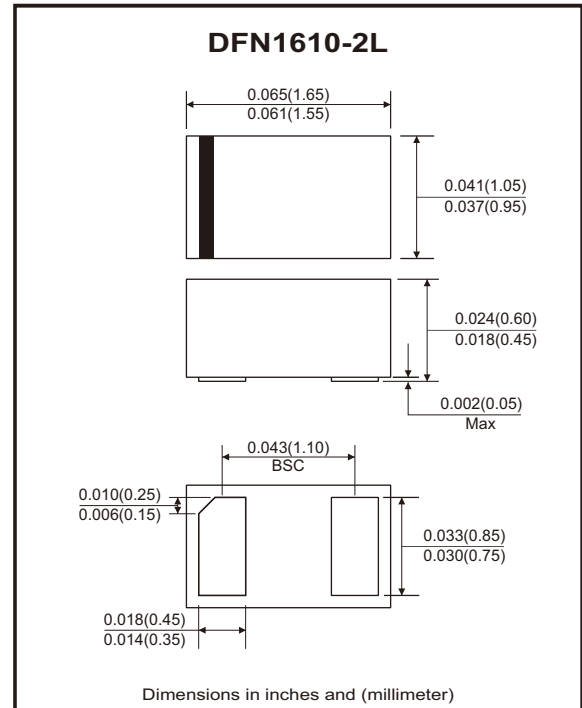

Maximum Rating (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Value	Unit
Peak pulse power	$T_P = 8/20\mu s$	P_{PP}	2340	W
Peak pulse current	$T_P = 8/20\mu s$	I_{PP}	180	A
ESD capability	IEC 61000-4-2(air) IEC 61000-4-2(contact)	ESD	± 30	kV
Operating junction temperature range		T_J	-55 to +150	°C
Storage temperature range		T_{STG}	-55 to +150	°C

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Working peak reverse voltage		V_{RWM}			4.8	V
Forward voltage	$I_F = 15mA$	V_F		0.8	1	V
Reverse leakage current	$V_{RWM} = 4.8V$	I_R			100	nA
Breakdown voltage	$I_T = 1mA$	V_{BR}	5		7	V
Clamping voltage	$I_{PP} = 100A, T_P = 8/20\mu s$	V_C		8	10	V
	$I_{PP} = 180A, T_P = 8/20\mu s$	V_C		11	13	
Clamping voltage	$TLP = 16A, T_P = 100ns$	V_C		6.2		V
Junction capacitance	$V_R = 0V, f = 1MHz$	C_J		535		pF

Typical Rating and Characteristic Curves (CPDUT4V8MUAHT-HF)

Fig.1 - 8/20μs Peak Pulse Current Waveform Acc. IEC 61000-4-5

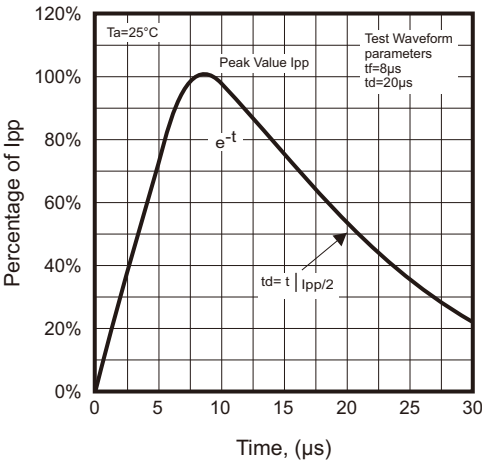


Fig.2 - Power Rating Derating Curve

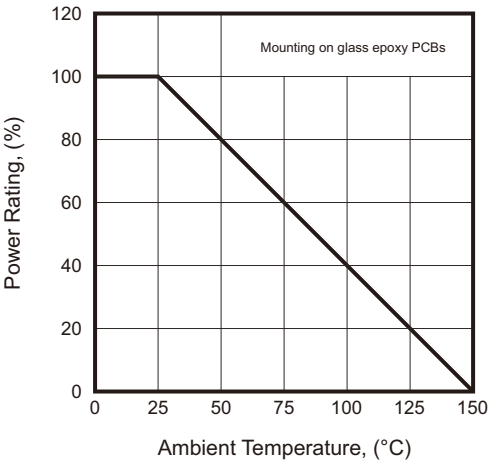


Fig.3 - Typical Clamping Voltage vs. Peak Pulse Current

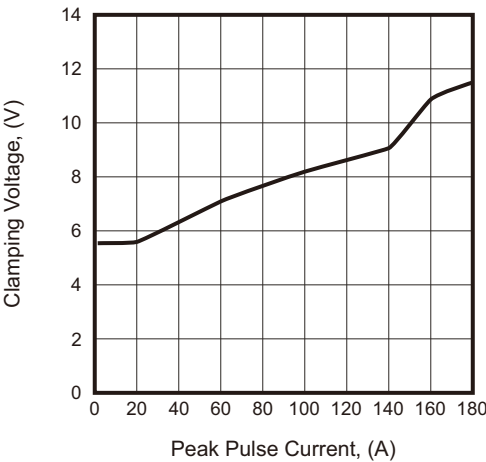


Fig.4 - Typical Capacitance Between Terminals Characteristics



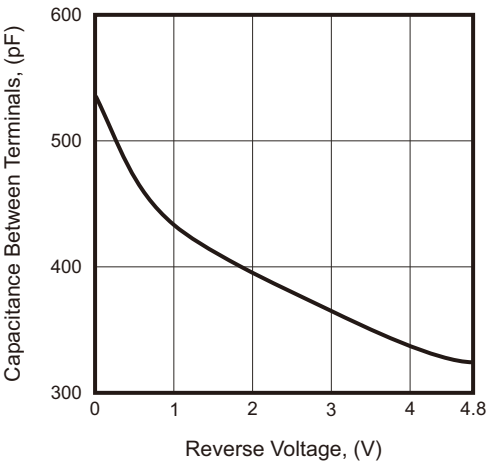


Fig.5 - TLP- Positive Pulse

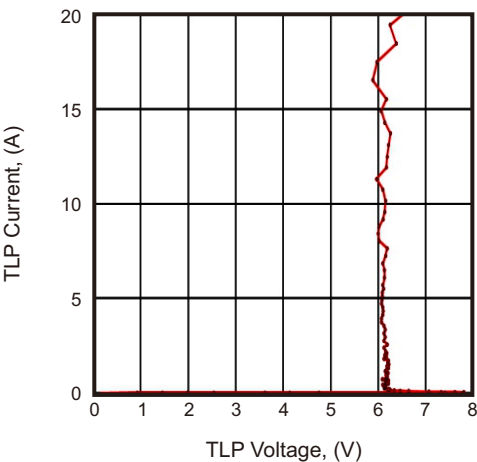

Reel Taping Specification

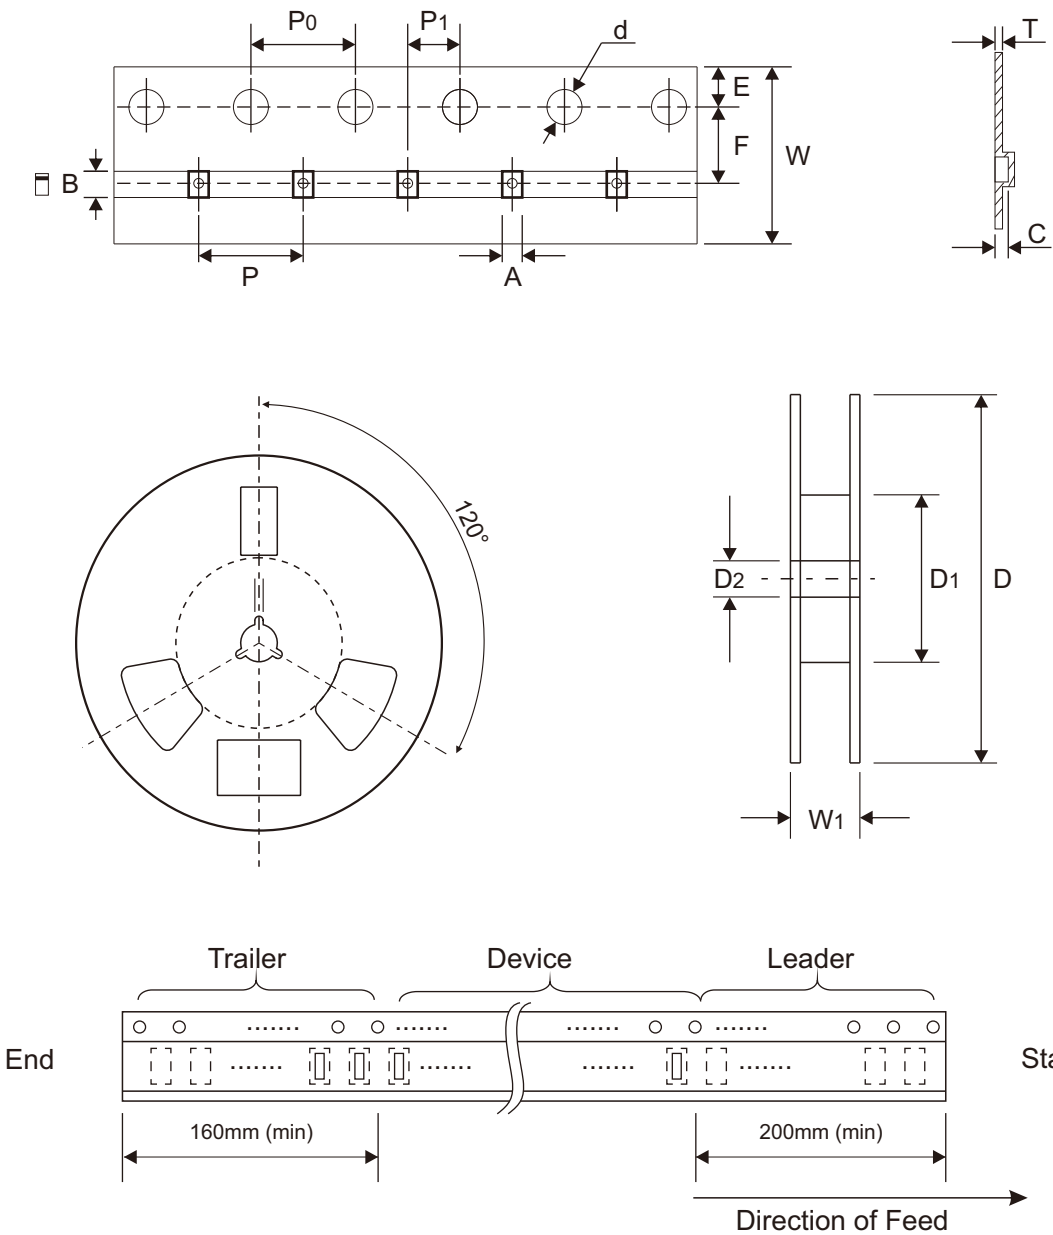

DFN1610-2L	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	1.17 ± 0.08	1.745 ± 0.055	0.66 ± 0.09	1.55 ± 0.10	180.00 ± 1.00	54.40 ± 1.00	13.00 + 0.50 - 0.20
	(inch)	0.046 ± 0.003	0.069 ± 0.002	0.026 ± 0.004	0.061 ± 0.004	7.087 ± 0.039	2.142 ± 0.039	0.512 + 0.020 - 0.008

DFN1610-2L	SYMBOL	E	F	P	P0	P1	T	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	0.20 ± 0.05	8.00 + 0.20 - 0.10	12.00 ± 1.30
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.008 ± 0.002	0.315 + 0.008 - 0.004	0.472 ± 0.051

Marking Code


Part Number	Marking Code
CPDUT4V8MUAHT-HF	H4T



⋮ = Control code

Suggested P.C.B. PAD Layout

SIZE	DFN1610-2L	
	(mm)	(inch)
A	0.625	0.025
B	1.00	0.039
C	0.60	0.024
D	1.225	0.048
E	1.85	0.073

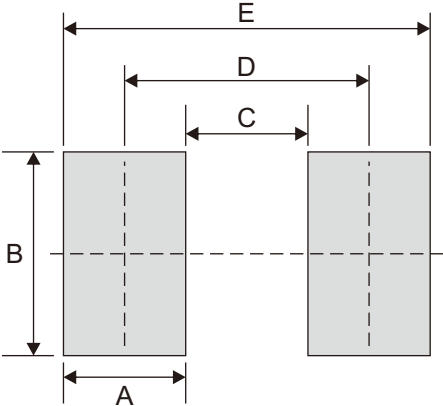

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
DFN1610-2L	3,000	7